

OPTONICA

LED Lighting for everyone!



Catalogue Edition 1.0 **2019**

OPTONICA

OPTONICA LED is one of the fastest growing LED lighting companies in Europe. We constantly offer our partners a carefully selected portfolio of products with proven quality that meet even the most discriminating requirements. Full range of lights and fixtures for domestic or industrial applications, our products are designed to fit any demand. Developing a vast network of distributors and offices in major European countries such as United Kingdom, Germany, Austria, Spain, Bulgaria and Hungary, our products are easily accessible.

OPTONICA LED offers latest-generation, energy efficient lighting, with no harmful emissions and which is completely recyclable. We believe in caring for the future generations. Please help us save the planet for a more beautiful and clean tomorrow. Let's make the right choice and illuminate the future - together!



www.OPTONICALED.com

CONTENTS

OPTONICA

LED SPOTLIGHTS	(03-22)
LED BULBS	(23-54)
LED TUBES	(55-62)
LED BATTEN LIGHTS	(63-64)
LED EMERGENCY LIGHTS	(65-66)
LED SURFACE PANELS	(67-76)
LED CEILING LIGHT	(77-88)
LED PANELS	(89-106)
LED DOWNLIGHT	(107-114)
LED STRIPS	(115-131)
LED SMD MODULES	(132-134)
LED POWER SUPPLIES	(135-140)
LED CONTROLLERS AND ACCESSORIES	(141-148)
LED TRACK LIGHTS	(149-154)
LED FLOODLIGHTS	(155-166)
LED WALL WASHERS	(167-172)
LED INDUSTRIAL LIGHTS	(173-178)
LED STREET LIGHTS	(179-188)
LED OUTDOOR LIGHTS.....	(189-190)
MOTION SENSORS.....	(191-198)
LUXURY PENDANTS.....	(199-206)




LED SPOTLIGHTS

OPTONICA




Watts	2W	CRI	>80
Input Voltage	AC,DC:12V	IP Rating	IP20
Flux	170 lm	Life Span	25 000 h
Beam Angle	320°	Dimension	φ10x30 mm

A+
EQ.Watts:
2W=16W



SKU No.	White Light
SP1615	6000K
	Neutral White
SP1616	4500K
	Warm White
SP1617	2800K
	Color temperature

2W SMD
LED Spotlight G4




EAN Code 6000K 3800156616158
EAN Code 4500K 3800156616165
EAN Code 2800K 3800156616172




Watts	3W	CRI	>80
Input Voltage	AC,DC:12V	IP Rating	IP20
Flux	210 lm	Life Span	25 000 h
Beam Angle	38°	Dimension	φ35x45 mm

A+
EQ.Watts:
3W=20W



SKU No.	White Light
SP1066	6000K
	Neutral White
SP1067	4500K
	Warm White
SP1068	2800K
	Color temperature

3W SMD
LED Spotlight G4/MR11



EAN Code 6000K 3800156610668
EAN Code 4500K 3800156610675
EAN Code 2800K 3800156610682

LED SPOTLIGHTS

OPTONICA

SKU No.

White Light
6000K **SP1638**

Neutral White
4500K **SP1639**

Warm White
2800K **SP1640**

Color temperature

45mm

15mm

Watts	3W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	220 lm	Life Span	25 000 h
Beam Angle	360°	Dimension	φ15x45 mm


5 PCS
BLISTER
PACK



A+
EQ.Watts:
3W=25W



EAN Code 6000K 3800156616387
EAN Code 4500K 3800156616394
EAN Code 2800K 3800156616400



3W SMD
LED Spotlight G9

SKU No.

White Light
6000K **SP1635**

Neutral White
4500K **SP1636**

Warm White
2800K **SP1637**

Color temperature

55mm

15mm

Watts	5W	CRI	>80
Input Voltage	AC:170-265V	IP Rating	IP20
Flux	380 lm	Life Span	25 000 h
Beam Angle	360°	Dimension	φ15x55 mm


5 PCS
BLISTER
PACK



A+
EQ.Watts:
5W=40W



EAN Code 6000K 3800156616356
EAN Code 4500K 3800156616363
EAN Code 2800K 3800156616370



5W SMD
LED Spotlight G9

LED SPOTLIGHTS


OPTONICA

6W SMD Dimmable LED Spotlight G9



Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	600 lm	Life Span	25 000 h
Beam Angle	320°	Dimension	φ15x65 mm

A+
EQ.Watts:
6W=40W



White Light	SP1641	6000K
Neutral White	SP1642	4500K
Warm White	SP1643	2800K

Color temperature

EAN Code 6000K 3800156616417
EAN Code 4500K 3800156616424
EAN Code 2800K 3800156616431


6W SMD LED Spotlight G9

NEW



Watts	6W	CRI	>80
Input Voltage	AC:17-265V	IP Rating	IP20
Flux	500 lm	Life Span	25 000 h
Beam Angle	300°	Dimension	φ16x58 mm

A+
EQ.Watts:
6W=35W



White Light	SP1618	6000K
Neutral White	SP1619	4500K
Warm White	SP1620	2800K

Color temperature

EAN Code 6000K 3800156616189
EAN Code 4500K 3800156616196
EAN Code 2800K 3800156616202

LED SPOTLIGHTS

OPTONICA


NEW



⚡ Watts	7W	☀ CRI	>80
⌚ Input Voltage	AC:220-240V	💧 IP Rating	IP20
☀ Flux	560 lm	⌚ Life Span	25 000 h
📐 Beam Angle	180°	📏 Dimension	φ74x21 mm

A+

EQ.Watts:
7W=45W



SKU No.

White Light
SP1541 6000K

Neutral White
SP1542 4500K

Warm White
SP1543 2800K

Color temperature

7W Recessed
LED Spotlight GX53



560
LUMENS



180°
BEAM ANGLE



GX53



IP20

EAN Code 6000K 3800156615410

EAN Code 4500K 3800156615427


EAN Code 2800K 3800156615434



⚡ Watts	12W	☀ CRI	>80
⌚ Input Voltage	AC:170-265V	💧 IP Rating	IP20
☀ Flux	960 lm	⌚ Life Span	25 000 h
📐 Beam Angle	36°	📏 Dimension	φ111x70 mm

A+

EQ.Watts:
12W=65W



SKU No.

White Light
SP1523 6000K

Neutral White
SP1524 4500K

Warm White
SP1525 2800K

Color temperature

12W AR111
LED Spotlight GU10



960
LUMENS



36°
BEAM ANGLE



GU10



IP20

EAN Code 6000K 3800156615236

EAN Code 4500K 3800156615243

EAN Code 2800K 3800156615250


LED SPOTLIGHTS

OPTONICA



⚡ Watts	9W	☀ CRI	>80
⚙ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	800 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ111x58mm

A+
EQ.Watts:
9W=60W



SKU No.

Neutral White
SP1531 4500K



Warm White
SP1532 2800K

Color temperature

9W AR111 SMD
LED Spotlight GU10



EAN Code 4500K 3800156615311
EAN Code 2800K 3800156615328

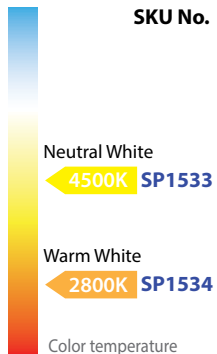

⚡ Watts	15W	☀ CRI	>80
⚙ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	1200 lm	🕒 Life Span	25 000 h
📐 Beam Angle	30°	📏 Dimension	φ111x58 mm

A+
EQ.Watts:
15W=90W



15W AR111 SMD
LED Spotlight GU10



EAN Code 4500K 3800156615335
EAN Code 2800K 3800156615342

LED SPOTLIGHTS

OPTONICA

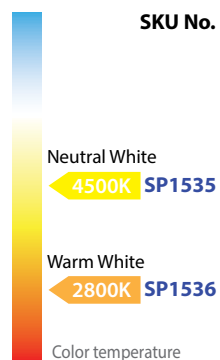

Watts	15W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1100 lm	Life Span	25 000 h
Beam Angle	30°	Dimension	φ111x58 mm

A+
EQ.Watts:
15W=90W



EAN Code 4500K 3800156615359
EAN Code 2800K 3800156615366



ACCESSORIES

AR111 FITTING Adjustable



OT5081 WHITE BODY
OT5082 SILVER BODY



150x150 mm

Dimension **180x180x42 mm**



OT5083 WHITE BODY
OT5084 SILVER BODY



300x150 mm

Dimension **330x180x42 mm**



OT5085 WHITE BODY
OT5086 SILVER BODY



450x150 mm

Dimension **480x180x42 mm**

For AR111

φ111mm



45°


LED SPOTLIGHTS

OPTONICA




⚡ Watts	5W	☀ CRI	>80
⌚ Input Voltage	DC:12V	💧 IP Rating	IP20
☀ Flux	320 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	110°	📏 Dimension	φ50x45 mm

A+
EQ.Watts:
5W=30W




SKU No.	White Light
SP1761	6000K
SP1762	Neutral White 4500K
SP1763	Warm White 2800K
Color temperature	

5W SMD Premium LED Spotlight MR16 , GU5.3



EAN Code 6000K [3800156617612](#)
EAN Code 4500K [3800156617629](#)
EAN Code 2800K [3800156617636](#)

SKU No.	White Light
6000K	SP1764
Neutral White	4500K
SP1765	
Warm White	2800K
SP1766	
Color temperature	




⚡ Watts	7W	☀ CRI	>80
⌚ Input Voltage	AC,DC:12V	💧 IP Rating	IP20
☀ Flux	500 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	110°	📏 Dimension	φ50x45 mm



A+
EQ.Watts:
7W=40W

7W SMD Premium LED Spotlight MR16 , GU5.3





EAN Code 6000K [3800156617643](#)
EAN Code 4500K [3800156617650](#)
EAN Code 2800K [3800156617667](#)



LED SPOTLIGHTS

OPTONICA

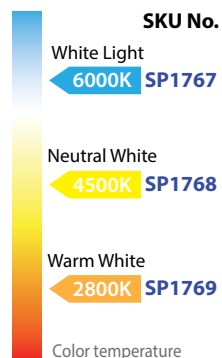


Watts	5W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x55mm



A+
EQ.Watts:
5W=30W



EAN Code 6000K [3800156617674](#)
EAN Code 4500K [3800156617681](#)
EAN Code 2800K [3800156617698](#)






5W Premium
LED Spotlight GU10

7W SMD Premium LED Spotlight GU10

Watts	7W	CRI	>80
Input Voltage	AC:175-265	IP Rating	IP20
Flux	500 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x55 mm

A+
EQ.Watts:
7W=40W

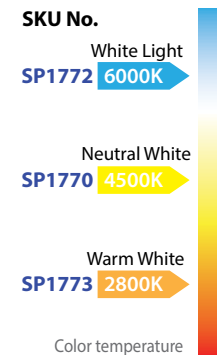

EAN Code 6000K [3800156617728](#)
EAN Code 4500K [3800156617704](#)
EAN Code 2800K [3800156617735](#)


LED SPOTLIGHTS

OPTONICA



⚡ Watts	4W	☀ CRI	>80
⚡ Input Voltage	AC,DC:12V	💧 IP Rating	IP20
☀ Flux	320 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	50°	📏 Dimension	φ50x55 mm


A+
EQ.Watts:
4W=25W



SKU No.	Color temperature
White Light SP1163 6000K	
Neutral White SP1167 4500K	
Warm White SP1164 2800K	


4W COB

LED Spotlight MR16 , GU5.3



EAN Code 6000K 3800156611634
EAN Code 4500K 3800156611672
EAN Code 2800K 3800156611641


SKU No.	Color temperature
White Light 6000K SP1168	
Neutral White 4500K SP1169	
Warm White 2800K SP1170	



⚡ Watts	6W	☀ CRI	>80
⚡ Input Voltage	AC,DC:12V	💧 IP Rating	IP20
☀ Flux	400 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	50°	📏 Dimension	φ50x55 mm

A+
EQ.Watts:
6W=35W

6W COB
LED Spotlight MR16 , GU5.3



EAN Code 6000K 3800156611689
EAN Code 4500K 3800156611696
EAN Code 2800K 3800156611702

LED SPOTLIGHTS

OPTONICA


SKU No.

White Light
6000K **SP1191**

Neutral White
4500K **SP1192**

Warm White
2800K **SP1193**

Color temperature



Watts	5W	CRI	>80
Input Voltage	DC:12V	IP Rating	IP20
Flux	400 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x45 mm

A+
EQ.Watts:
5W=30W



EAN Code 6000K 3800156611917
EAN Code 4500K 3800156611924
EAN Code 2800K 3800156611931

400
LUMENS

110°
BEAM ANGLE

GU5.3

IP20


5W SMD
LED Spotlight MR16, GU5.3

7W SMD LED Spotlight MR16, GU5.3



Watts	7W	CRI	>80
Input Voltage	DC:12V	IP Rating	IP20
Flux	560 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x45 mm

A+
EQ.Watts:
7W=40W



SKU No.

White Light
6000K **SP1194**

Neutral White
4500K **SP1195**

Warm White
2800K **SP1196**

Color temperature

560
LUMENS

110°
BEAM ANGLE

GU5.3

IP20

EAN Code 6000K 3800156611948
EAN Code 4500K 3800156611955
EAN Code 2800K 3800156611962


LED SPOTLIGHTS

OPTONICA



Watts	4W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60 mm

A+
EQ.Watts:
4W=25W



SKU No.

White Light
SP1263 6000K

Neutral White
SP1264 4500K

Warm White
SP1265 2800K

Color temperature

4W COB

LED Spotlight GU10



LUMENS



BEAM ANGLE



GU10





IP20

EAN Code 6000K [3800156612631](#)

EAN Code 4500K [3800156612648](#)

EAN Code 2800K [3800156612655](#)

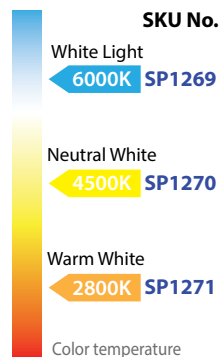

Watts	6W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60 mm

A+
EQ.Watts:
6W=35W

6W COB
LED Spotlight GU10



EAN Code 6000K [3800156612693](#)

EAN Code 4500K [3800156612709](#)

EAN Code 2800K [3800156612716](#)



LUMENS



BEAM ANGLE



GU10



IP20

LED SPOTLIGHTS

OPTONICA


SKU No.

White Light
6000K **SP1266**

Neutral White
4500K **SP1267**

Warm White
2800K **SP1268**

Color temperature




Watts	4W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60mm

A+
EQ.Watts:
4W=25W



EAN Code 6000K [3800156612662](#)
EAN Code 4500K [3800156612679](#)
EAN Code 2800K [3800156612686](#)




4W COB Dimmable
LED Spotlight GU10

6W COB Dimmable LED Spotlight GU10

Watts	6W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60 mm

A+
EQ.Watts:
6W=35W




SKU No.

White Light
6000K **SP1272**

Neutral White
4500K **SP1273**

Warm White
2800K **SP1274**

Color temperature



EAN Code 6000K [3800156612723](#)
EAN Code 4500K [3800156612730](#)
EAN Code 2800K [3800156612747](#)


LED SPOTLIGHTS

OPTONICA




Watts	5W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	400 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x57 mm

A+
EQ.Watts:
5W=30W




SKU No.	Color temperature
SP1929	White Light 6000K
SP1930	Neutral White 4500K
SP1931	Warm White 2800K

5W SMD LED Spotlight GU10



EAN Code 6000K 3800156619296
EAN Code 4500K 3800156619302
EAN Code 2800K 3800156619319

SKU No.	Color temperature
SP1932	White Light 6000K
SP1933	Neutral White 4500K
SP1934	Warm White 2800K




Watts	7W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	560 lm	Life Span	25 000 h
Beam Angle	110°	Dimension	φ50x57 mm

A+
EQ.Watts:
7W=40W

7W SMD LED Spotlight GU10





EAN Code 6000K 3800156619326
EAN Code 4500K 3800156619333
EAN Code 2800K 3800156619340



LED SPOTLIGHTS

OPTONICA

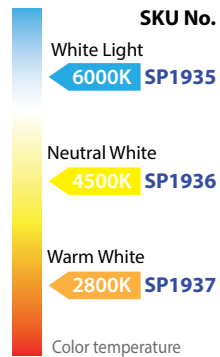


Watts	5W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	400 lm	Life Span	25 000 h
Beam Angle	38°	Dimension	φ50x57mm

A+
EQ.Watts:
5W=30W



EAN Code 6000K 3800156619357
EAN Code 4500K 3800156619364
EAN Code 2800K 3800156619371






5W SMD
LED Spotlight GU10

7W SMD LED Spotlight GU10

Watts	7W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	560 lm	Life Span	25 000 h
Beam Angle	38°	Dimension	φ50x57 mm

A+
EQ.Watts:
7W=40W

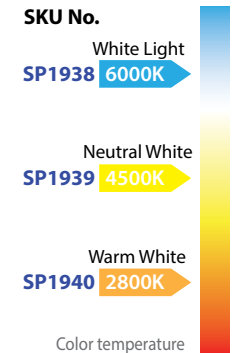

EAN Code 6000K 3800156619388
EAN Code 4500K 3800156619395
EAN Code 2800K 3800156619401

LED SPOTLIGHTS

OPTONICA




⚡ Watts	7W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
💡 Flux	560 lm	🕒 Life Span	25 000 h
📐 Beam Angle	110°	📏 Dimension	φ50x57 mm

A+
EQ.Watts:
7W=40W



Dimmable



SKU No.	Color temperature
White Light SP1945 6000K	6000K
Neutral White SP1946 4500K	4500K
Warm White SP1947 2800K	2800K

Color temperature

7W SMD Dimmable
LED Spotlight GU10



LUMENS



BEAM ANGLE



GU10



IP20

EAN Code 6000K 3800156619456
EAN Code 4500K 3800156619463
EAN Code 2800K 3800156619470




⚡ Watts	4W	☀ CRI	>80
⌚ Input Voltage	AC:220-240V	💧 IP Rating	IP20
💡 Flux	320 lm	🕒 Life Span	25 000 h
📐 Beam Angle	50°	📏 Dimension	φ50x60 mm

A+
EQ.Watts:
4W=25W



Dimmable




SKU No.	Color temperature
White Light SP1957 6000K	6000K
Neutral White SP1958 4500K	4500K
Warm White SP1959 2800K	2800K

Color temperature

4W COB
LED Spotlight GU10



LUMENS



BEAM ANGLE



GU10





IP20

EAN Code 6000K 3800156619579
EAN Code 4500K 3800156619586
EAN Code 2800K 3800156619593

LED SPOTLIGHTS

OPTONICA

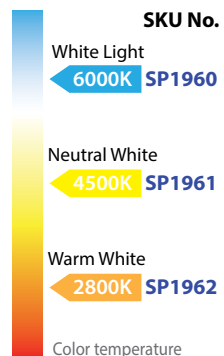

Watts	6W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60 mm

A+
EQ.Watts:
6W=35W

EAN Code 6000K 3800156619609
EAN Code 4500K 3800156619616
EAN Code 2800K 3800156619623



LUMENS



BEAM ANGLE





GU10



IP20



6W COB
LED Spotlight GU10

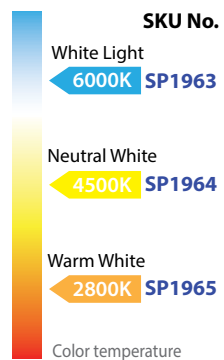

Watts	6W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	50°	Dimension	φ50x60 mm

A+
EQ.Watts:
6W=35W



Dimmable

EAN Code 6000K 3800156619630
EAN Code 4500K 3800156619647
EAN Code 2800K 3800156619654



LUMENS



BEAM ANGLE



GU10



IP20



6W COB Dimmable
LED Spotlight GU10

ACCESSORIES

GU10,MR16 FITTING



72 mm



OT5070-N WHITE BODY

⊗ Dimension **φ80x29 mm**



OT5071-N INOX BODY

⊗ Dimension **φ80x29 mm**



OT5072-N CHROME BODY

⊗ Dimension **φ80x29 mm**



ACCESSORIES

GU10,MR16 FITTING



72mm



OT5073 WHITE BODY

⊗ Dimension **83x83x29 mm**



OT5074 INOX BODY

⊗ Dimension **83x83x29 mm**



OT5075 CHROME BODY

⊗ Dimension **83x83x29 mm**



LED SPOTLIGHTS

OPTONICA

ACCESSORIES

GU10,MR16 FITTING Adjustable



OT5170 WHITE BODY

⊗ Dimension **φ83x29 mm**

OT5172 CHROME BODY

⊗ Dimension **φ83x29 mm**

OT5171 INOX BODY

⊗ Dimension **φ83x29 mm**



45°



72mm



ACCESSORIES

GU10,MR16 FITTING Adjustable



OT5076 WHITE BODY

⊗ Dimension **83x83x29 mm**

OT5077 INOX BODY

⊗ Dimension **83x83x29 mm**

OT5078 CHROME BODY

⊗ Dimension **83x83x29 mm**



45°



72mm



LED SPOTLIGHTS

OPTONICA



**FIRE RATED FITTING
WITH GU10 SOCKET**



**FIRE RATED FITTING
WITH GU10 SOCKET
Adjustable**



**FIRE RATED FITTING IP65
WITH GU10 SOCKET**



SKU No.

OT5060 WHITE SHELL

OT5061 CHROME SHELL

OT5062 SATIN CHROME SHELL

IP Rating IP20


Dimension $\phi 85 \times 110$ mm



IP20



GU10
Socket



80 mm

SKU No.

OT5063 WHITE SHELL

OT5064 CHROME SHELL

OT5065 SATIN CHROME SHELL

IP Rating IP20

Dimension $\phi 85 \times 130$ mm


Adjustable



45°



GU10
Socket



80 mm

SKU No.

OT5066 WHITE SHELL

OT5067 CHROME SHELL

OT5068 SATIN CHROME SHELL

IP Rating IP65


Dimension $\phi 85 \times 130$ mm



IP65



GU10
Socket



80 mm

LED SPOTLIGHTS

OPTONICA



Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP65
Flux	540 lm	Life Span	25 000 h
Beam Angle	40°	Dimension	φ84x67mm



With 3 magnetic replaceable covers

SKU No.

Neutral White
OT5042 4500K

Warm White
OT5041 2800K

Color temperature

A+
EQ.Watts:
6W=40W




Dimmable

FIRE RATED 6W SMD LED
Replaceable covers



540
LUMENS



40°
BEAM ANGLE



60 mm



IP65

EAN Code 4500K 3800156650428

EAN Code 2800K 3800156650411



Watts	8W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP65
Flux	570 -630lm	Life Span	25 000 h
Beam Angle	40°	Dimension	φ80x80mm



With 3 magnetic replaceable covers

SKU No.

White Light
OT5043 6000K

to

Warm White
3000K

Color temperature

A+
EQ.Watts:
8W=50W



Dimmable




COLOR CHANGING KNOB : 3000-4500-6000K

FIRE RATED 8W COB LED PF>0.9
COLOR CHANGING LED 3000 to 6000K



From 570
LUMENS



40°
BEAM ANGLE



65 mm



IP65

EAN Code 3000-6000K 3800156650435


LED BULBS

OPTONICA



Watts	7W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	560 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x115 mm

A+
EQ.Watts:
7W=45W




SKU No.
White Light
SP1715 6000K
Neutral White
SP1716 4500K
Warm White
SP1717 2800K
Color temperature

7W E27 Premium
LED BULB A60



EAN Code 6000K [3800156617155](#)
EAN Code 4500K [3800156617162](#)
EAN Code 2800K [3800156617179](#)

SKU No.
White Light
6000K SP1718
Neutral White
4500K SP1719
Warm White
2800K SP1720
Color temperature



Watts	10W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	806 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x118 mm



A+
EQ.Watts:
10W=65W



10W E27 Premium
LED BULB A60



EAN Code 6000K [3800156617186](#)
EAN Code 4500K [3800156617193](#)
EAN Code 2800K [3800156617209](#)

LED BULBS

OPTONICA

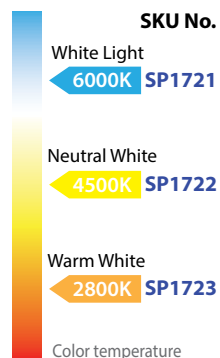

Watts	12W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1055 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x118mm



A+
EQ.Watts:
12W=75W



EAN Code 6000K [3800156617216](#)
EAN Code 4500K [3800156617223](#)
EAN Code 2800K [3800156617230](#)



LUMENS



BEAM ANGLE



E27





IP20

12W E27 Premium
LED BULB A60

15W E27 Premium
LED BULB A65

Watts	15W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1320 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ65x120 mm

A+
EQ.Watts:
15W=90W

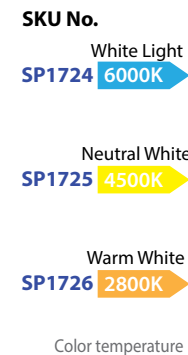

LUMENS



BEAM ANGLE



E27



IP20



EAN Code 6000K [3800156617247](#)
EAN Code 4500K [3800156617254](#)
EAN Code 2800K [3800156617261](#)

LED BULBS

OPTONICA




Watts	10W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	806 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x118 mm

A+
EQ.Watts:
10W=65W

**3PCS
BOX**

**5
YEARS
WARRANTY**



SKU No.
White Light
SP1727 6000K

Neutral White
SP1728 4500K

Warm White
SP1729 2800K

Color temperature

10W E27 Premium LED BULB A60 3PCS BOX

806
LUMENS

270°
BEAM ANGLE

E27


IP20

EAN Code 6000K 3800156617278

EAN Code 4500K 3800156617285

EAN Code 2800K 3800156617292

SKU No.
White Light
6000K SP1730
Neutral White
4500K SP1731
Warm White
2800K SP1732
Color temperature



Watts	12W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1055 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x118 mm

**5
YEARS
WARRANTY**

**3PCS
BOX**

A+
EQ.Watts:
12W=75W

12W E27 Premium LED BULB A60 3PCS BOX

1055
LUMENS

270°
BEAM ANGLE

E27

IP20




EAN Code 6000K 3800156617308

EAN Code 4500K 3800156617315

EAN Code 2800K 3800156617322

LED BULBS

OPTONICA

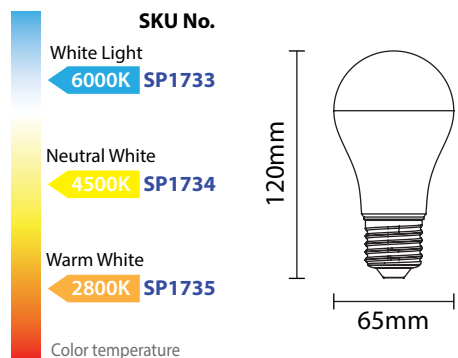

Watts	15W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1320 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ65x120mm



A+
EQ.Watts:
15W=90W



EAN Code 6000K 3800156617339

EAN Code 4500K 3800156617346

EAN Code 2800K 3800156617353



**15W E27 Premium
LED BULB A65 3PCS BOX**


Outdoor string light 14.4 meters

Total Length: **14.4 meters**
Lamp Holder: **15 pieces E27 sockets**
Distance between sockets: **0.9 m**

LED Bulbs not included !

EAN Code **SUSPENDED SOCKETS** 3800156650510

EAN Code **FIXED SOCKETS** 3800156650527



SUSPENDED SOCKETS
SKU No. **OT5051**



FIXED SOCKETS
SKU No. **OT5052**




LED BULBS

OPTONICA



Watts	4W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ45x75 mm

A⁺
EQ.Watts:
4W=25W




SKU No.
White Light
SP1736 6000K

Neutral White
SP1737 4500K

Warm White
SP1738 2800K


Color temperature

4W E27 Premium
LED BULB G45



EAN Code 6000K [3800156617360](#)
EAN Code 4500K [3800156617377](#)
EAN Code 2800K [3800156617384](#)

SKU No.
White Light
6000K SP1739
Neutral White
4500K SP1740
Warm White
2800K SP1741
Color temperature




Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ45x75 mm



A⁺
EQ.Watts:
6W=35W



6W E27 Premium
LED BULB A60



EAN Code 6000K [3800156617391](#)
EAN Code 4500K [3800156617407](#)
EAN Code 2800K [3800156617414](#)

LED BULBS

OPTONICA

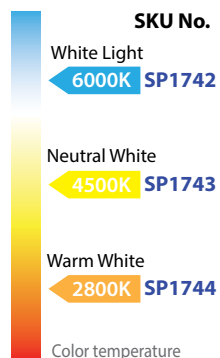

Watts	12W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1055 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ95x138mm



A+
EQ.Watts:
12W=75W



**12W E27 Premium
LED BULB G95**

EAN Code 6000K [3800156617421](#)
EAN Code 4500K [3800156617438](#)
EAN Code 2800K [3800156617445](#)



LUMENS



BEAM ANGLE



E27




IP20

15W E27 Premium LED BULB G120

Watts	15W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1320 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ120x155 mm

A+
EQ.Watts:
15W=90W



LUMENS



BEAM ANGLE



E27



IP20

EAN Code 6000K [3800156617452](#)
EAN Code 4500K [3800156617469](#)
EAN Code 2800K [3800156617476](#)


LED BULBS

OPTONICA



Watts	4W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ45x57 mm

A⁺
EQ.Watts:
4W=25W




SKU No.	Color temperature
White Light SP1838 6000K	
Neutral White SP1839 4500K	
Warm White SP1840 2800K	

4W E27
LED BULB G45



EAN Code 6000K [3800156618381](#)
EAN Code 4500K [3800156618398](#)
EAN Code 2800K [3800156618404](#)

SKU No.	Color temperature
White Light 6000K SP1816	
Neutral White 4500K SP1817	
Warm White 2800K SP1818	




Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ45x75 mm

A⁺
EQ.Watts:
6W=35W

6W E27
LED BULB G45



EAN Code 6000K [3800156618169](#)
EAN Code 4500K [3800156618176](#)
EAN Code 2800K [3800156618183](#)



LED BULBS

OPTONICA


SKU No.

White Light
6000K **SP1821**

Neutral White
4500K **SP1822**

Warm White
2800K **SP1823**

Color temperature



Watts	5W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	400 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x110mm

A+
EQ.Watts:
5W=30W



EAN Code 6000K 3800156618213

EAN Code 4500K 3800156618220

EAN Code 2800K 3800156618237




5W E27
LED BULB A60

7W E27
LED BULB A60



Watts	7W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	560 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ60x115 mm

A+
EQ.Watts:
7W=40W



SKU No.

White Light
6000K **SP1824**

Neutral White
4500K **SP1825**

Warm White
2800K **SP1826**

Color temperature



EAN Code 6000K 3800156618244

EAN Code 4500K 3800156618251

EAN Code 2800K 3800156618268


LED BULBS

OPTONICA




⚡ Watts	10W	☀ CRI	>80
⚡ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	800 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ60x118mm

A+
EQ.Watts:
10W=65W




SKU No.	Color temperature
White Light SP1827 6000K	
Neutral White SP1828 4500K	
Warm White SP1829 2800K	

10W E27
LED BULB A60

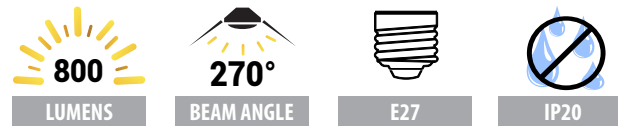

EAN Code 6000K [3800156618275](#)
EAN Code 4500K [3800156618282](#)
EAN Code 2800K [3800156618299](#)

SKU No.	Color temperature
White Light 6000K SP1831	
Neutral White 4500K SP1832	
Warm White 2800K SP1833	




⚡ Watts	12W	☀ CRI	>80
⚡ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	960 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ60x120 mm

A+
EQ.Watts:
12W=75W

12W E27
LED BULB A60




EAN Code 6000K [3800156618312](#)
EAN Code 4500K [3800156618329](#)
EAN Code 2800K [3800156618336](#)

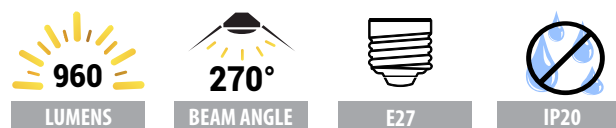

LED BULBS

OPTONICA

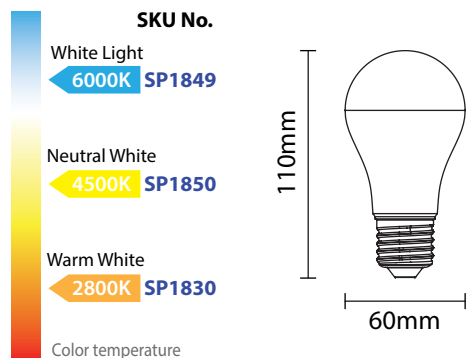

Watts	10W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	800 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ60x110mm

A+
EQ.Watts:
10W=65W



Dimmable

**10W E27 Dimmable
LED BULB A60**

EAN Code 6000K 3800156618497

EAN Code 4500K 3800156618503



EAN Code 2800K 3800156618305



**12W E27 Dimmable
LED BULB A60**

Watts	12W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ60x120 mm

A+
EQ.Watts:
12W=75W

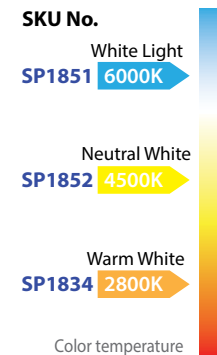

Dimmable



EAN Code 6000K 3800156618510

EAN Code 4500K 3800156618527

EAN Code 2800K 3800156618343

LED BULBS

OPTONICA




⚡ Watts	15W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	1200 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ65x125mm

A+

EQ.Watts:

15W=90W



Model No.

White Light
SP1835 6000K

Neutral White
SP1836 4500K

Warm White
SP1837 2800K

Color temperature

15W E27
LED BULB A65



EAN Code 6000K 3800156618350

EAN Code 4500K 3800156618367

EAN Code 2800K 3800156618374


Model No.

White Light
6000K SP1881

Neutral White
4500K SP1882

Warm White
2800K SP1883

Color temperature



⚡ Watts	18W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	1440 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ70x145 mm

A+

EQ.Watts:

18W=110W

18W E27
LED BULB A70





EAN Code 6000K 3800156618817

EAN Code 4500K 3800156618824

EAN Code 2800K 3800156618831

LED BULBS

OPTONICA

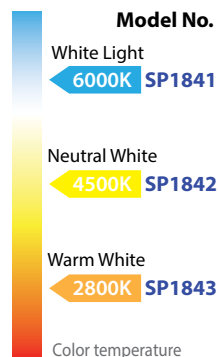

Watts	12W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	1050 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ95x138mm

A+
EQ.Watts:
12W=75W



EAN Code 6000K 3800156618411
EAN Code 4500K 3800156618428
EAN Code 2800K 3800156618435





12W E27
LED BULB G95

15W E27 LED BULB G120



Watts	15W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	1380 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ120x155 mm

A+
EQ.Watts:
15W=90W

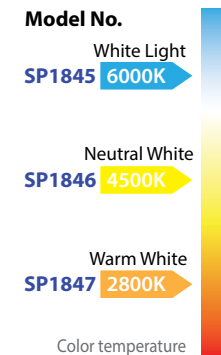

EAN Code 6000K 3800156618459
EAN Code 4500K 3800156618466
EAN Code 2800K 3800156618473

LED BULBS

OPTONICA




Dimmable

12W E27 Dimmable
LED BULB G95

⚡ Watts	12W	☀ CRI	>80
⚙ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	1050 lm	⌚ Life Span	25 000 h
📐 Beam Angle	270°	📏 Dimension	φ95x138mm

A+
EQ.Watts:
12W=75W



SKU No.


Warm White
SP1844 2800K

Color temperature



EAN Code 2800K 3800156618442

SKU No.



Warm White
2800K SP1848
Color temperature

⚡ Watts	15W	☀ CRI	>80
⚙ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	1380 lm	⌚ Life Span	25 000 h
📐 Beam Angle	270°	📏 Dimension	φ120x155mm

A+
EQ.Watts:
15W=90W

15W E27 Dimmable
LED BULB G120





Dimmable



EAN Code 2800K 3800156618480

LED BULBS

OPTONICA

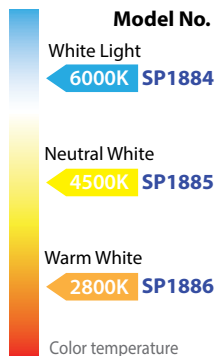

Watts	18W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	1440 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ125x172mm

A+
EQ.Watts:
18W=110W



18W E27
LED BULB G125

EAN Code 6000K 3800156618848
EAN Code 4500K 3800156618855
EAN Code 2800K 3800156618862



LUMENS



BEAM ANGLE



E27





IP20

6W E27
LED BULB R63



Watts	6W	CRI	>80
Input Voltage	AC:220-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	270°	Dimension	φ63x100 mm

A+
EQ.Watts:
6W=40W



LUMENS



BEAM ANGLE



E27



IP20

EAN Code 6000K 3800156618763
EAN Code 4500K 3800156618770
EAN Code 2800K 3800156618787

LED BULBS


OPTONICA



⚡ Watts	18W	☀️ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀️ Flux	1440 lm	⌚ Life Span	25 000 h
📐 Beam Angle	270°	📏 Dimension	φ70x145 mm

A+

**EQ.Watts:
18W=110W**



SKU No.

White Light
SP1748 6000K

Neutral White
SP1749 4500K

Warm White
SP1750 2800K

Color temperature

**18W E27 Premium
LED BULB A70**



LUMENS



BEAM ANGLE



E27



IP20

EAN Code 6000K [3800156617155](#)

EAN Code 4500K [3800156617162](#)

EAN Code 2800K [3800156617179](#)


SKU No.

White Light
6000K SP1780

Neutral White
4500K SP1781

Warm White
2800K SP1782

Color temperature



⚡ Watts	6W	☀️ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀️ Flux	480 lm	⌚ Life Span	25 000 h
📐 Beam Angle	180°	📏 Dimension	φ37x100 mm



A+

**EQ.Watts:
6W=40W**

**6W E14 Premium
LED BULB C37**



LUMENS



BEAM ANGLE



E14



IP20



EAN Code 6000K [3800156617803](#)

EAN Code 4500K [3800156617810](#)

EAN Code 2800K [3800156617827](#)

LED BULBS

OPTONICA

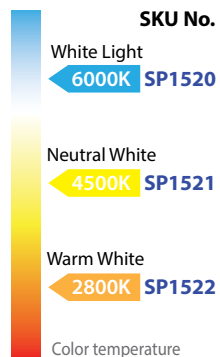

Watts	30W	CRI	>80
Input Voltage	AC:220-240V	IP Rating	IP20
Flux	2300 lm	Life Span	25 000 h
Beam Angle	24°	Dimension	φ94x123mm

OSRAM
CHIP

A+
EQ.Watts:
30W=160W



EAN Code 6000K 3800156615205
EAN Code 4500K 3800156615212
EAN Code 2800K 3800156615229



30W E27
LED BULB PAR30



8+2W E27 LED BULB MOSQUITO ZAPPER



Watts	8+2W Zapper	CRI	>80
Input Voltage	AC:100-265V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ95x172 mm

A+
EQ.Watts:
8W=90W

2W
Anti Mosquito Zapper



EAN Code 4500K 3800156618190


LED BULBS

OPTONICA




⚡ Watts	6W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	480 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	240°	⊗ Dimension	φ45x78mm

A+
EQ.Watts:
6W=40W




SKU No.	Color temperature
White Light SP1753 6000K	6000K
Neutral White SP1754 4500K	4500K
Warm White SP1755 2800K	2800K

6W E14 Premium LED BULB P45



EAN Code 6000K [3800156617537](#)
EAN Code 4500K [3800156617544](#)
EAN Code 2800K [3800156617551](#)

SKU No.	Color temperature
White Light 6000K SP1756	6000K
Neutral White 4500K SP1757	4500K
Warm White 2800K SP1758	2800K



⚡ Watts	6W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
☀ Flux	450 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	180°	⊗ Dimension	φ50x90mm




A+
EQ.Watts:
6W=40W

6W E14 Premium LED BULB R50





EAN Code 6000K [3800156617568](#)
EAN Code 4500K [3800156617575](#)
EAN Code 2800K [3800156617582](#)



LED BULBS

OPTONICA

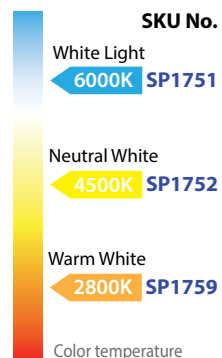

Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x125mm



A+
EQ.Watts:
6W=40W

**6W E14 Premium
LED BULB C37T**



EAN Code 6000K [3800156617513](#)
EAN Code 4500K [3800156617520](#)
EAN Code 2800K [3800156617599](#)



LUMENS



BEAM ANGLE



E14





IP20

**6W E14
LED BULB C37T**



Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x125mm

A+
EQ.Watts:
6W=40W

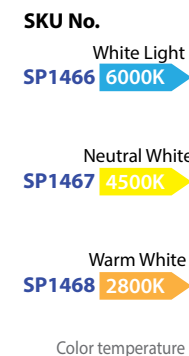

LUMENS



BEAM ANGLE



E14



IP20

EAN Code 6000K [3800156614666](#)
EAN Code 4500K [3800156614673](#)
EAN Code 2800K [3800156614680](#)


LED BULBS

OPTONICA




Watts	3W	CRI	>80
Input Voltage	AC:86-265V	IP Rating	IP20
Flux	240 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x100mm

A+
EQ.Watts:
3W=18W




SKU No.	White Light
SP1454	6000K
SKU No.	Neutral White
SP1455	4500K
SKU No.	Warm White
SP1456	2800K
Color temperature	

3W E14
LED BULB C37

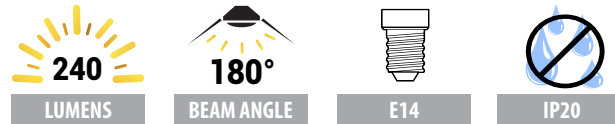

EAN Code 6000K 3800156614543
EAN Code 4500K 3800156614550
EAN Code 2800K 3800156614567

SKU No.	White Light
6000K	SP1457
SKU No.	Neutral White
4500K	SP1458
SKU No.	Warm White
2800K	SP1459
Color temperature	




Watts	4W	CRI	>80
Input Voltage	AC:86-265V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x100mm

A+
EQ.Watts:
4W=25W

4W E14
LED BULB C37



EAN Code 6000K 3800156614574
EAN Code 4500K 3800156614581
EAN Code 2800K 3800156614598




LED BULBS

OPTONICA




Watts	6W	CRI	>80
Input Voltage	AC:86-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x100mm

A+
EQ.Watts:
6W=40W




SKU No.
White Light
SP1460 6000K
Neutral White
SP1461 4500K
Warm White
SP1462 2800K
Color temperature

6W E14
LED BULB C37

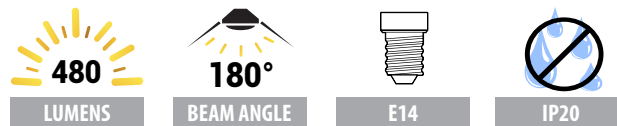

EAN Code 6000K [3800156614604](#)
EAN Code 4500K [3800156614611](#)
EAN Code 2800K [3800156614628](#)

SKU No.
White Light
6000K SP1464
Neutral White
4500K SP1465
Warm White
2800K SP1463
Color temperature




Watts	6W	CRI	>80
Input Voltage	AC:86-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x100mm

A+
EQ.Watts:
6W=40W



6W DIMMABLE E14
LED BULB C37

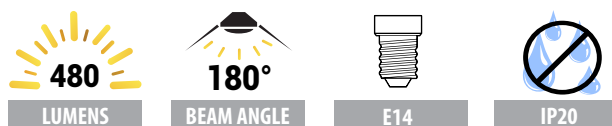

EAN Code 6000K [3800156614642](#)
EAN Code 4500K [3800156614659](#)
EAN Code 2800K [3800156614635](#)


LED BULBS

OPTONICA




Watts	4W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	320 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ45x78mm

A⁺
EQ.Watts:
4W=25W




SKU No.	Color temperature
White Light SP1451 6000K	
Neutral White SP1452 4500K	
Warm White SP1453 2800K	

4W E14
LED BULB G45

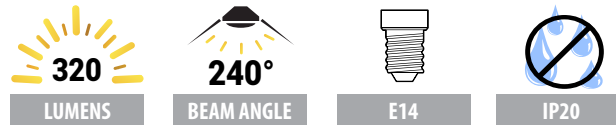

EAN Code 6000K [3800156614512](#)
EAN Code 4500K [3800156614529](#)
EAN Code 2800K [3800156614536](#)


SKU No.	Color temperature
White Light 6000K SP1447	
Neutral White 4500K SP1448	
Warm White 2800K SP1449	



Watts	6W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	240°	Dimension	φ45x78mm

A⁺⁺
EQ.Watts:
6W=35W

6W E14
LED BULB G45



EAN Code 6000K [3800156614475](#)
EAN Code 4500K [3800156614482](#)
EAN Code 2800K [3800156614499](#)

LED BULBS

OPTONICA


SKU No.

White Light
6000K **SP1487**

Neutral White
4500K **SP1488**

Warm White
2800K **SP1489**

Color temperature



Watts	4W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	300 lm	Life Span	25 000 h
Beam Angle	200°	Dimension	φ39x68mm

A+
EQ.Watts:
4W=25W



EAN Code 6000K 3800156614871
EAN Code 4500K 3800156614888
EAN Code 2800K 3800156614895




4W E14
LED BULB R39

6W E14
LED BULB R50



Watts	6W	CRI	>80
Input Voltage	AC:170-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ50x85 mm

A+
EQ.Watts:
6W=35W




SKU No.

White Light
6000K **SP1438**

Neutral White
4500K **SP1439**

Warm White
2800K **SP1440**

Color temperature



EAN Code 6000K 3800156614383
EAN Code 4500K 3800156614390
EAN Code 2800K 3800156614406

LED BULBS HIGH POWER

OPTONICA



HIGH LUMEN



270°
BEAM ANGLE



SAVE
80%
ENERGY



IP20



LED BULBS E27

HIGH POWER

25W
T100
2300
LUMENS

SP1891 White Light 6000K
SP1892 Neutral White 4500K

35W
T120
3200
LUMENS

SP1894 White Light 6000K
SP1895 Neutral White 4500K

45W
T140
4100
LUMENS

SP1897 White Light 6000K
SP1898 Neutral White 4500K

	LED BULB E27 T100	LED BULB E27 T120	LED BULB E27 T140
SKU No.	SP1891/SP1892	SP1894/SP1895	SP1897/SP1898
Watts	25W	35W	45W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
Flux	2300 lm	3200 lm	4100 lm
Beam Angle	270°	270°	270°
Light Color	WH/NW	WH/NW	WH/NW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ100x185 mm	φ120x223mm	φ140x86 mm



LED FILAMENT BULBS

OPTONICA



GOLDEN GLASS

4W Filament
LED BULB E27

SP1870 Warm Light 2800K



GOLDEN GLASS

6.5W Filament
LED BULB E27

SP1871 Warm Light 2800K



5W Filament
LED BULB 14

SP1872 Warm Light 2800K

	4W FILAMENT ST64 E27	6.5W FILAMENT ST64 E27	5W FILAMENT R50 E14
SKU No.	SP1870	SP1871	SP1872
Watts	4W	6.5W	5W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
Flux	400 lm	810 lm	600 lm
Beam Angle	300°	300°	70°
Light Color	WARM LIGHT	WARM LIGHT	WARM LIGHT
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ58x139 mm	φ58x139 mm	φ50x86 mm

SKU No.

SP1870 Warm Light
SP1871 2800K
SP1872

Color temperature





200
LUMENS

2W Filament LED BULB G45 E27


SP1864 White Light **6000K**
SP1865 Neutral White **4500K**
SP1866 Warm White **2800K**



400
LUMENS

4W Filament LED BULB G45 E27

SP1867 White Light **6000K**
SP1868 Neutral White **4500K**
SP1869 Warm White **2800K**



400
LUMENS

4W Filament LED BULB G125 E27

SP1863 Neutral White **4500K**
SP1862 Warm White **2800K**



810
LUMENS

6.5W Filament LED BULB G125 E27

SP1861 Neutral White **4500K**
SP1860 Warm White **2800K**

2W FILAMENT G45 E27

4W FILAMENT G45 E27


4W FILAMENT G125 E27

6.5W FILAMENT G125 E27

SKU No.	SP1864/SP1865/SP1866	SP1867/SP1868/SP1869
Watts	2W	4W
Input Voltage	AC:175-265V	AC:175-265V
Flux	200 lm	400 lm
Beam Angle	300°	300°
Light Color	WH/NW/WW	WH/NW/WW
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ45x78 mm	φ45x78 mm



SKU No.	SP1863/SP1862	SP1861/SP1860
Watts	4W	6.5W
Input Voltage	AC:175-265V	AC:175-265V
Flux	400 lm	810 lm
Beam Angle	300°	300°
Light Color	NW/WW	NW/WW
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h
Dimension	φ125x165 mm	φ125x165 mm





400

LUMENS

4W Filament

LED BULB A60 E27

SP1857 White Light 6000K
SP1858 Neutral White 4500K
SP1859 Warm White 2800K




600

LUMENS

5W Filament

LED BULB A60 E27

SP1854 White Light 6000K
SP1855 Neutral White 4500K
SP1856 Warm White 2800K



300°

BEAM ANGLE



E27



IP20



810

LUMENS

6.5W Filament

LED BULB G125 E27

SP1873 White Light 6000K
SP1874 Neutral White 4500K
SP1875 Warm White 2800K



600

LUMENS



Dimmable


6W Filament

Dimmable

LED BULB G125 E27

SP1853 Warm White 2800K


	4W FILAMENT A60 E27	5W FILAMENT A60 E27	6.5W FILAMENT A60 E27	6W FILAMENT A60 E27
SKU No.	SP1857/SP1858/SP1859	SP1854/SP1855/SP1856	SP1873/SP1874/SP1875	SP1853
Watts	4W	5W	6.5W	6W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V	AC:175-265V
Flux	400 lm	600 lm	810 lm	600 lm
Beam Angle	300°	300°	300°	300°
Light Color	WH/NW/WW	WH/NW/WW	NW/WW	WARM LIGHT
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ60x106 mm	φ60x106 mm	φ60x106 mm	φ60x106 mm

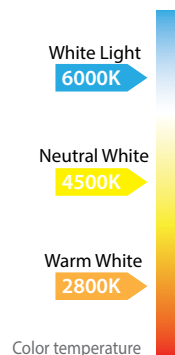



**4W Filament
LED BULB C35**

SP1470 White Light 6000K
SP1471 Neutral White 4500K
SP1472 Warm White 2800K



**400
LUMENS**

**300°
BEAM ANGLE**

E14


IP20



Dimmable

**4W Filament
Dimmable
LED BULB C35**

SP1473 Warm White 2800K



**400
LUMENS**

**300°
BEAM ANGLE**


E14

IP20



**4W Filament
LED BULB C35T**

SP1480 White Light 6000K
SP1481 Neutral White 4500K
SP1482 Warm White 2800K




**400
LUMENS**

**300°
BEAM ANGLE**

E14



IP20

	4W FILAMENT C35 E14	4W FILAMENT Dimmable C35 E14	4W FILAMENT C35T E14
SKU No.	SP1470/SP1471/SP1472	SP1473	SP1480/SP1481/SP1482
Watts	4W	4W	4W
Input Voltage	AC:175-265V	AC:175-265V	AC:175-265V
Flux	400 lm	400 lm	400 lm
Beam Angle	300°	300°	300°
Light Color	WH/NW/WW	WARM LIGHT	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ35x98 mm	φ35x98 mm	φ35x115 mm



LED FILAMENT BULBS

OPTONICA

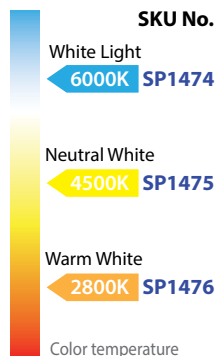

Watts	2W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	200 lm	Life Span	25 000 h
Beam Angle	300°	Dimension	φ45x78mm

A++
EQ.Watts:
2W=18W



EAN Code 6000K 3800156614741
EAN Code 4500K 3800156614758
EAN Code 2800K 3800156614765





2W E14
LED BULB G45

4W E14
LED BULB G45

Watts	4W	CRI	>80
Input Voltage	AC:85-265V	IP Rating	IP20
Flux	400 lm	Life Span	25 000 h
Beam Angle	300°	Dimension	φ45x78 mm

A++
EQ.Watts:
4W=30W

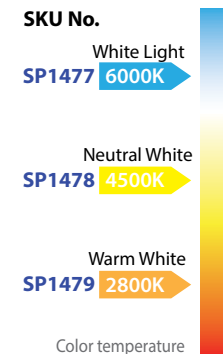

EAN Code 6000K 3800156614772
EAN Code 4500K 3800156614789
EAN Code 2800K 3800156614796


LED BULBS

OPTONICA





⚡ Watts	5W	☀ CRI	>80
⚙ Input Voltage	AC:175-240V	💧 IP Rating	IP20
☀ Flux	400 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	φ45x57 mm

A++
EQ.Watts:
5W=35W




SKU No.	Color temperature
White Light SP1901 6000K	6000K
Neutral White SP1902 4500K	4500K
Warm White SP1903 2800K	2800K

5W B22 LED BULB G45



EAN Code 6000K [3800156619012](#)
EAN Code 4500K [3800156619029](#)
EAN Code 2800K [3800156619036](#)

SKU No.	Color temperature
White Light 6000K SP1904	6000K
Neutral White 4500K SP1905	4500K
Warm White 2800K SP1906	2800K





⚡ Watts	7W	☀ CRI	>80
⚙ Input Voltage	AC:175-240V	💧 IP Rating	IP20
☀ Flux	520 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	φ60x110 mm

A++
EQ.Watts:
7W=45W

7W B22 LED BULB A60





EAN Code 6000K [3800156619043](#)
EAN Code 4500K [3800156619050](#)
EAN Code 2800K [3800156619067](#)



LED BULBS

OPTONICA


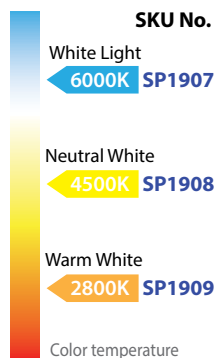


Watts	10W	CRI	>80
Input Voltage	AC:170-265V	IP Rating	IP20
Flux	800 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ60x110mm

A++
EQ.Watts:
10W=70W



EAN Code 6000K [3800156619074](#)
EAN Code 4500K [3800156619081](#)
EAN Code 2800K [3800156619098](#)






10W B22
LED BULB A60

12W B22 LED BULB A60

Watts	12W	CRI	>80
Input Voltage	AC:170-265V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ60x110mm

A++
EQ.Watts:
12W=90W

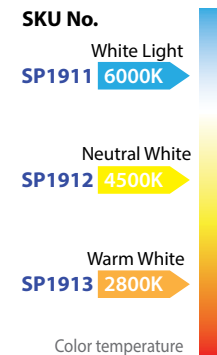

EAN Code 6000K [3800156619111](#)
EAN Code 4500K [3800156619128](#)
EAN Code 2800K [3800156619135](#)

LED BULBS

OPTONICA



Dimmable

10W Dimmable B22
LED BULB A60

SKU No.	SP1910
Watts	10W
Input Voltage	AC:175-240V
Flux	800 lm
Beam Angle	180°
Light Color	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ60x110mm



Dimmable

12W Dimmable B22
LED BULB A60

SKU No.	SP1914
Watts	12W
Input Voltage	AC:175-240V
Flux	960 lm
Beam Angle	180°
Light Color	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ60x110mm

SKU No.

Warm White
SP1910
SP1914 **2800K**

Color temperature





180°
BEAM ANGLE



B22



IP20

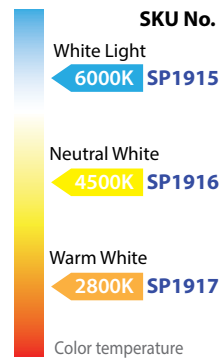

Watts	15W	CRI	>80
Input Voltage	AC:175-240V	IP Rating	IP20
Flux	1200 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ60x110 mm

A+
EQ.Watts:
15W=110W

15W B22
LED BULB A60



EAN Code 6000K 3800156619159
EAN Code 4500K 3800156619166
EAN Code 2800K 3800156619173



1200
LUMENS



180°
BEAM ANGLE




B22



IP20

LED BULBS

OPTONICA

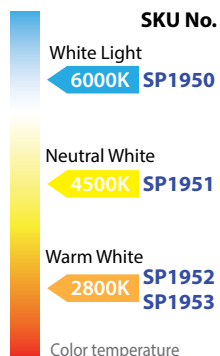

SKU No.	SP1950/SP1951/SP1952
Watts	6W
Input Voltage	AC:175-240V
Flux	480 lm
Beam Angle	180°
Light Color	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ37x90mm





6W B22
LED BULB C37

SKU No.	SP1953
Watts	6W
Input Voltage	AC:175-240V
Flux	480 lm
Beam Angle	180°
Light Color	>80
IP Rating	IP20
Life Span	25 000 h
Dimension	φ37x90mm



Dimmable

6W Dimmable B22
LED BULB C37




6W B15
LED BULB C37



Watts	6W	CRI	>80
Input Voltage	AC:170-265V	IP Rating	IP20
Flux	480 lm	Life Span	25 000 h
Beam Angle	180°	Dimension	φ37x90mm

A++
EQ.Watts:
6W=40W



EAN Code 6000K 3800156619548
EAN Code 4500K 3800156619555
EAN Code 2800K 3800156619562

LED TUBES

OPTONICA



LED TUBE T5

MAT WITH SWITCH

4W T5



LUMENS

31CM
SIZE

8W T5



LUMENS

57CM
SIZE

12W T5



LUMENS

87CM
SIZE

16W T5



LUMENS

117CM
SIZE

20W T5



LUMENS

145CM
SIZE

SWITCH



A+



200°

BEAM ANGLE



SAVE
80%

ENERGY



IP20

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

4W T5 TUBE-31cm

8W T5 TUBE-57cm

12W T5 TUBE-87cm

16W T5 TUBE-117cm

20W T5 TUBE-145cm

TU5521/TU5522/TU5523

TU5524/TU5525/TU5526

TU5527/TU5528/TU5529

TU5530/TU5531/TU5532

TU5533/TU5534/TU5535

4W

8W

12W

16W

20W

AC:220V

AC:220V

AC:220V

AC:220V

AC:220V

320 lm

640 lm

960 lm

1280 lm

1600 lm

200°

200°

200°

200°

200°

WH/NW/WW

WH/NW/WW

WH/NW/WW

WH/NW/WW

WH/NW/WW

>80

>80

>80

>80

>80

IP20

IP20

IP20

IP20

IP20

25 000 h

25 000 h

25 000 h

25 000 h

25 000 h





28x310 mm

28x570 mm

28x870 mm

28x1170 mm

28x1450 mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

3800156655218

3800156655249

3800156655270

3800156655300

3800156655331

EAN Code 4500K

3800156655225

3800156655256

3800156655287

3800156655317

3800156655348

EAN Code 2800K

3800156655232

3800156655263

3800156655294

3800156655324

3800156655355

LED TUBES

OPTONICA



LED TUBE T5 MAT

4W T5



8W T5



12W T5



16W T5



20W T5



SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

4W T5 TUBE
31 CM

8W T5 TUBE
57 CM

12W T5 TUBE
87 CM

16W T5 TUBE
117 CM

20W T5 TUBE
145 CM

TU5653/TU5645/TU5655

TU5654/TU5646/TU5656

TU5652/TU5647/TU5657

TU5651/TU5648/TU5658

TU5650/TU5649/TU5659

4W

8W

12W

16W

20W

AC:220V

AC:220V

AC:220V

AC:220V

AC:220V

320 lm

640 lm

960 lm

1280 lm

1600 lm

200°

200°

200°

200°

200°

WH/NW/WW

WH/NW/WW

WH/NW/WW

WH/NW/WW

WH/NW/WW

>80

>80

>80

>80

>80

IP20

IP20

IP20

IP20

IP20

25 000 h

25 000 h

25 000 h

25 000 h

25 000 h






28x310 mm

28x570 mm

28x870 mm

28x1170 mm

28x1450 mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature



200°
BEAM ANGLE



SAVE
80%
ENERGY



IP20



WITH STARTER

9W



810
LUMENS



60CM
SIZE

18W



1610
LUMENS



120CM
SIZE

22W



1980
LUMENS



150CM
SIZE

LED TUBE T8 PF>0.9

PROFESSIONAL EDITION
ONE SIDE POWER



TU5611-M White Light 6000K
TU5613-M Neutral White 4500K
TU5612-M Warm White 2800K

TU5623-M White Light 6000K
TU5625-M Neutral White 4500K
TU5624-M Warm White 2800K

TU5641-M White Light 6000K
TU5642-M Neutral White 4500K
TU5643-M Warm White 2800K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

9W LED TUBE 60CM

TU5611-M/TU5613-M/TU5612-M

9W

AC:220-240V

810 lm


200°

WH/NW/WW

>80

IP20

25 000 h



18W LED TUBE 120CM

TU5623-M/TU5625-M/TU5624-M

18W

AC:220-240V

1610 lm

200°

WH/NW/WW

>80

IP20

25 000 h



22W LED TUBE 150CM

TU5641-M/TU5642-M/TU5643-M

22W

AC:220-240V

1980 lm


200°

WH/NW/WW

>80

IP20

25 000 h



EAN Code 6000K

3800156656116

EAN Code 4500K

3800156656130

EAN Code 2800K

3800156656123

3800156656239

3800156656253

3800156656246

3800156656413

3800156656420

3800156656437



LED TUBES

OPTONICA



A+



WITH STARTER

9W

1050

LUMENS

18W

2150

LUMENS

22W

2650

LUMENS

60CM
SIZE

120CM
SIZE

150CM
SIZE

LED TUBE T8 PF>0.95

NANO PLASTIC

ONE SIDE POWER



270°
BEAM ANGLE



IP20



120lm/W
HIGH LUMEN

TU5511 White Light 6000K
TU5512 Neutral White 4500K
TU5513 Warm White 2800K

TU5514 White Light 6000K
TU5515 Neutral White 4500K
TU5516 Warm White 2800K

TU5517 White Light 6000K
TU5518 Neutral Light 4500K
TU5519 Warm Light 2800K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

9W LED TUBE 60CM

TU5511/TU5512/TU5513

9W

AC:175-240V

1050 lm


270°

WH/NW/WW

>80

IP20

25 000 h



18W LED TUBE 120CM

TU5514/TU5515/TU5516

18W

AC:175-240V

2150 lm


270°

WH/NW/WW

>80

IP20

25 000 h



22W LED TUBE 150CM

TU5517/TU5518/TU5519

22W

AC:175-240V

2650 lm


270°

WH/NW/WW

>80

IP20

25 000 h



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

3800156655119

EAN Code 4500K

3800156655126

EAN Code 2800K

3800156655133

3800156655140

3800156655157

3800156655164




3800156655171

3800156655188

3800156655195

LED TUBES

OPTONICA



LED TUBE T8 PF>0.9


CITY LINE GLASS
ONE SIDE POWER



TU5601	White Light	6000K	TU5604	White Light	6000K	TU5607	White Light	6000K
TU5602	Neutral White	4500K	TU5605	Neutral White	4500K	TU5608	Neutral White	4500K
TU5603	Warm White	2800K	TU5606	Warm White	2800K	TU5609	Warm White	2800K

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension

9W LED TUBE 60CM	18W LED TUBE 120CM	22W LED TUBE 150CM
TU5601/TU5602/TU5603	TU5604/TU5605/TU5606	TU5607/TU5608/TU5609
9W	18W	22W
AC:175-240V	AC:175-240V	AC:175-240V
800 lm	1600 lm	2000 lm
270°	270°	270°
WH/NW/WW	WH/NW/WW	WH/NW/WW
>80	>80	>80
IP20	IP20	IP20
25 000 h	25 000 h	25 000 h

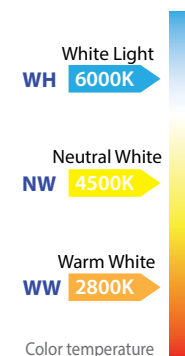

EAN Code 6000K	3800156656017	3800156656048	3800156656079
EAN Code 4500K	3800156656024	3800156656055	3800156656086
EAN Code 2800K	3800156656031	3800156656062	3800156656093

LED TUBES

OPTONICA



For Single LED Tube 9W




SKU No.
OT6650



For Single LED Tube 18W



OT6652



T8 TUBE FIXTURE

SINGLE T8 TUBE SOCKET
FOR ONE-SIDE POWER


For Single LED Tube 23W




OT6654



For Two LED Tubes 9W



OT6651



For Two LED Tubes 18W



OT6653




T8 TUBE FIXTURE

DUBLE TUBE SOCKET
FOR ONE-SIDE POWER

For Two LED Tubes 23W



OT6655



LED TUBES

OPTONICA




**120CM
SIZE**

⚡ Watts	40W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP65
💡 Flux	3800 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	1200x75mm



STAINLESS STEEL CLIPS



SKU No.
White Light
OT6661 6000K

Neutral White
OT6662 4500K

Color temperature

40W LED WATERPROOF LIGHTING IP65 FIXTURE TYPE





60W LED WATERPROOF LIGHTING IP65 FIXTURE TYPE

SKU No.
White Light
6000K OT6663
Neutral White
4500K OT6664
Color temperature

⚡ Watts	60W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP65
💡 Flux	5700 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	1500x75mm



STAINLESS STEEL CLIPS



**150CM
SIZE**




**120CM
SIZE**


⚡ Watts	40W	☀️ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP65
💡 Flux	3800 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	1200x75mm



STAINLESS STEEL CLIPS



40W LED WATERPROOF LIGHTING IP65 FIXTURE TYPE



With **MOTION PIR SENSOR**
SKU No. **OT6665** Neutral Light **4500K**



EMERGENCY


SKU No. **OT6666** Neutral Light **4500K**

With **MOTION PIR SENSOR**
SKU No. **OT6667** Neutral Light **4500K**

⚡ Watts	60W	☀️ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP65
💡 Flux	5700 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	180°	📏 Dimension	1500x75mm




STAINLESS STEEL CLIPS



60W LED WATERPROOF LIGHTING IP65 FIXTURE TYPE

**150CM
SIZE**



EMERGENCY

SKU No. **OT6668** Neutral Light **4500K**

LED BATTEN LIGHT

OPTONICA



120°
BEAM ANGLE



SAVE
80%
ENERGY



IP20

10W



800
LUMENS

30CM
SIZE

20W



1600
LUMENS

60CM
SIZE

40W



3200
LUMENS

120CM
SIZE

50W



4150
LUMENS

150CM
SIZE

LED BATTEN LIGHT $PF > 0.9$

STAINLESS STEEL CLIPS WITH CONNECTOR CABLE GLAND



OT6671 White Light 6000K	OT6674 White Light 6000K	OT6677 White Light 6000K	OT6680 White Light 6000K
OT6672 Neutral White 4500K	OT6675 Neutral White 4500K	OT6678 Neutral White 4500K	OT6681 Neutral White 4500K
OT6673 Warm White 2800K	OT6676 Warm White 2800K	OT6679 Warm White 2800K	OT6682 Warm White 2800K

10W LED Batten 30CM

20W LED Batten 60CM

40W LED Batten 120CM

50W LED Batten 150CM

SKU No.

OT6671/OT6672/OT6673

OT6674/OT6675/OT6676

OT6677/OT6678/OT6679

OT6680/OT6681/OT6682

Watts

10W

20W

40W

50W

Input Voltage

AC:220-240V

AC:220-240V

AC:220-240V

AC:220-240V

Flux

800 lm

1600 lm

3200 lm

4150 lm

Beam Angle

120°

120°

120°

120°

Light Color

WH/NW/WW

WH/NW/WW

WH/NW/WW

WH/NW/WW

CRI

>80

>80

>80

>80

IP Rating

IP20

IP20

IP20

IP20

Life Span






25 000 h

25 000 h

25 000 h

25 000 h

Dimension



EAN Code 6000K

3800156666719

EAN Code 4500K

3800156666726

EAN Code 2800K

3800156666733

3800156666740

3800156666757

3800156666764

3800156666771

3800156666788

3800156666795


3800156666801

3800156666818

3800156666825

LED BATTEN LIGHT

OPTONICA



LED BATTEN LIGHT **PF>0.9**

STAINLESS STEEL CLIPS - Waterproof IP65



TU6691 White Light **6000K**
TU6692 Neutral White **4500K**




TU6694 White Light **6000K**
TU6695 Neutral White **4500K**

TU6697 White Light **6000K**
TU6698 Neutral White **4500K**

20W LED Batten 60CM

40W LED Batten 120CM

50W LED Batten 150CM

SKU No.	TU6691/TU6692	TU6694/TU6695	TU6697/TU6698
Watts	20W	40W	50W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	1600 lm	3200 lm	4150 lm
Beam Angle	120°	120°	120°
Light Color	WH/NW	WH/NW	WH/NW
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	600x75x25 mm 	1200x75x25 mm 	1500x75x25 mm 
EAN Code 6000K	3800156666917	3800156666948	3800156666979
EAN Code 4500K	3800156666924	3800156666955	3800156666986



EMERGENCY LIGHT

OPTONICA

An emergency light is a battery-backed lighting device that switches on automatically when a building experiences a power outage.

All bulkhead and exit sign are included 4 pictogram :

- Left Arrow
- Right Arrow
- Down Arrow
- EXIT



Emergency LED Light Bulkhead



IP65



- 📖 **SKU No.** WW7201
- ⚡ **Watts** 3W
- 💡 **Type LED** 16 pcs SMD 2835
- ⚡ **Voltage** AC: 220-240V
- 💧 **IP Rating** IP20
- 🌈 **Light Color** White light
- 🔋 **Battery** 3.6V1500mAh Ni-Cd battery
- 🕒 **Emergency duration** > 3 Hours

Recessed kit for WW7201



Model No. WW7202

Emergency LED Exit Sign

Wall / Surface Mount



-  **SKU No.** **WW7203**
-  **Watts** 2W
-  **Type LED** 16 pcs SMD 2835
-  **Voltage** AC: 220-240V
-  **IP Rating** IP20
-  **Light Color** White light
-  **Battery** 3.6V900mAh Ni-Cd battery
-  **Emergency duration** > 3 Hours

Emergency LED Exit Sign

Wall / Surface Mount



-  **SKU No.** **WW7204**
-  **Watts** 2W
-  **Type LED** 16 pcs SMD 2835
-  **Voltage** AC: 220-240V
-  **IP Rating** IP20
-  **Light Color** White light
-  **Battery** 3.6V900mAh Ni-Cd battery
-  **Emergency duration** > 3 Hours

Emergency LED Exit Sign

Recessed Hanging



-  **SKU No.** **WW7205**
-  **Watts** 2W
-  **Type LED** 16 pcs SMD 2835
-  **Voltage** AC: 220-240V
-  **IP Rating** IP20
-  **Light Color** White light
-  **Battery** 3.6V 900mAh Ni-Cd battery
-  **Emergency duration** > 3 Hours

Emergency LED Exit Sign


Recessed Fixed



-  **SKU No.** **WW7206**
-  **Watts** 2W
-  **Type LED** 16 pcs SMD 2835
-  **Voltage** AC: 220-240V
-  **IP Rating** IP20
-  **Light Color** White light
-  **Battery** 3.6V900mAh Ni-Cd battery
-  **Emergency duration** > 3 Hours



COLOR CHANGING KNOB : 3000-4500-6000K




CCT-SURFACE LED PANEL

COLOR CHANGING LED 3000-4500-6000K

ROUND Slim Ceiling Light

A+




DL2535 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2536 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2537 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2538 COLOR CHANGING LIGHT

3000K - 4500K - 6000K

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension

6W Surface Panel	12W Surface Panel	18W Surface Panel	24W Surface Panel
DL2535	DL2536	DL2537	DL2538
6W	12W	18W	24W
AC:165-265V	AC:165-265V	AC:165-265V	AC:165-265V
480 lm	960 lm	1440 lm	1920 lm
100°	100°	100°	100°
WH-NW-WW	WH-NW-WW	WH-NW-WW	WH-NW-WW
>80	>80	>80	>80
IP44 Front	IP44 Front	IP44 Front	IP44 Front
25 000 h	25 000 h	25 000 h	25 000 h
φ115x32 mm	φ170x32 mm	φ220x32 mm	φ240x32 mm




EAN Code

3800156625358

3800156625365

3800156625372

3800156625389

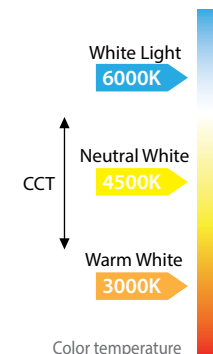

LED SURFACE PANELS

OPTONICA



COLOR CHANGING KNOB : 3000-4500-6000K



BEAM ANGLE



ENERGY



IP44


A⁺



DL2539 COLOR CHANGING LIGHT
3000K - 4500K - 6000K



DL2540 COLOR CHANGING LIGHT
3000K - 4500K - 6000K



DL2541 COLOR CHANGING LIGHT
3000K - 4500K - 6000K



DL2542 COLOR CHANGING LIGHT
3000K - 4500K - 6000K


CCT-SURFACE LED PANEL

COLOR CHANGING LED 3000-4500-6000K

SQUARE Slim Ceiling Light

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension

6W Surface Panel	12W Surface Panel	18W Surface Panel	24W Surface Panel
DL2539	DL2540	DL2541	DL2542
6W	12W	18W	24W
AC:165-265V	AC:165-265V	AC:165-265V	AC:165-265V
480 lm	960 lm	1440 lm	1920 lm
100°	100°	100°	100°
WH-NW-WW	WH-NW-WW	WH-NW-WW	WH-NW-WW
>80	>80	>80	>80
IP44 Front	IP44 Front	IP44 Front	IP44 Front
25 000 h	25 000 h	25 000 h	25 000 h
122x122x35 mm	172x172x35 mm	227x227x35 mm	227x227x35 mm

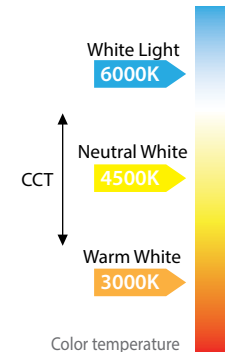

EAN Code

3800156625396


3800156625402

3800156625419

3800156625426

LED SURFACE PANELS

OPTONICA



6W



12W



18W



24W



SURFACE PANEL ROUND PF>0.9

OUTER INSTALLATION

DL2511	White Light	6000K	DL2514	White Light	6000K	DL2517	White Light	6000K	DL2520	White Light	6000K
DL2512	Neutral White	4500K	DL2515	Neutral White	4500K	DL2518	Neutral White	4500K	DL2521	Neutral White	4500K
DL2513	Warm White	2800K	DL2516	Warm White	2800K	DL2519	Warm White	2800K	DL2522	Warm White	2800K



SKU No.



Watts



Input Voltage



Flux



Beam Angle



Light Color



CRI



IP Rating



Life Span



Dimension

6W SURFACE PANEL

12W SURFACE PANEL

18W SURFACE PANEL

24W SURFACE PANEL

DL2511/DL2512/DL2513	DL2514/DL2515/DL2516	DL2517/DL2518/DL2519	DL2520/DL2521/DL2522
6W	12W	18W	24W
AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
420 lm	960 lm	1440lm	1920 lm
150°	150°	150°	150°
WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
>80	>80	>80	>80
IP20	IP20	IP20	IP20
25 000 h	25 000 h	25 000 h	25 000 h
φ120x38 mm 	φ172x38 mm 	φ225x38 mm 	φ300x38 mm 

White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

3800156625112

3800156625143

3800156625174

3800156625204

EAN Code 4500K

3800156625129

3800156625150

3800156625181

3800156625211

EAN Code 2800K

3800156625136



3800156625167

3800156625198

3800156625228

LED SURFACE PANELS

OPTONICA



SURFACE PANEL SQUARE PF>0.9

OUTER INSTALLATION

DL2523	White Light	6000K	DL2526	White Light	6000K	DL2529	White Light	6000K	DL2532	White Light	6000K
DL2524	Neutral White	4500K	DL2527	Neutral White	4500K	DL2530	Neutral White	4500K	DL2533	Neutral Light	4500K
DL2525	Warm White	2800K	DL2528	Warm White	2800K	DL2531	Warm White	2800K	DL2534	Warm Light	2800K

	6W SURFACE PANEL	12W SURFACE PANEL	18W SURFACE PANEL	24W SURFACE PANEL
SKU No.	DL2523/DL2524/DL2525	DL2526/DL2527/DL2528	DL2529/DL2530/DL2531	DL2532/DL2533/DL2534
Watts	6W	12W	18W	24W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
Flux	420 lm	960 lm	1440 lm	1920 lm
Beam Angle	150°	150°	150°	150°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	120x120x35 mm	167x167x35 mm	220x220x35 mm	295x295x35 mm
EAN Code 6000K	3800156625235	3800156625266	3800156625297	3800156625327
EAN Code 4500K	3800156625242	3800156625273	3800156625303	3800156625334
EAN Code 2800K	3800156625259	3800156625280	3800156625310	3800156625341



NEW



Built-in Driver

A+



120°

BEAM ANGLE



SAVE 80%

ENERGY



IP20

6W



375

LUMENS

DL2645 White Light **6000K**
DL2646 Neutral White **4500K**
DL2647 Warm White **2800K**

12W



940

LUMENS

DL2648 White Light **6000K**
DL2649 Neutral White **4500K**
DL2650 Warm White **2800K**

18W



1500

LUMENS

DL2651 White Light **6000K**
DL2652 Neutral White **4500K**
DL2653 Warm White **2800K**

LED SURFACE PANEL

BUILT-IN DRIVER

ROUND SURFACE MODULE

- SKU No.**
- Watts**
- Input Voltage**
- Flux**
- Beam Angle**
- Light Color**
- CRI**
- IP Rating**
- Life Span**
- Dimension**

6W SURFACE PANEL

DL2645/DL2646/DL2647

6W

AC:95-265V

375 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ150x35 mm



12W SURFACE PANEL

DL2648/DL2649/DL2650

12W

AC:95-265V

940 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ200x35 mm



18W SURFACE PANEL

DL2651/DL2652/DL2653

18W

AC:95-265V

1500 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ250x35 mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

EAN Code 4500K

EAN Code 2800K

3800156626454

3800156626461

3800156626478

3800156626485

3800156626492

3800156626508

3800156626515

3800156626522

3800156626539

NEW



Built-in Driver

A+



120°
BEAM ANGLE



SAVE 80%
ENERGY



IP20

6W



LUMENS

DL2657 White Light 6000K
DL2658 Neutral White 4500K
DL2659 Warm White 2800K

12W



LUMENS

DL2660 White Light 6000K
DL2661 Neutral White 4500K
DL2662 Warm White 2800K

18W



LUMENS

DL2663 White Light 6000K
DL2664 Neutral White 4500K
DL2665 Warm White 2800K

LED SURFACE PANEL

BUILT-IN DRIVER

SQUARE SURFACE MODULE

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

6W SURFACE PANEL

DL2657/DL2658/DL2659

6W

AC:95-265V

375 lm

120°

WH/NW/WW

>80

IP20

25 000 h

150x150x35 mm



12W SURFACE PANEL

DL2660/DL2661/DL2662

12W

AC:95-265V

940 lm

120°

WH/NW/WW

>80

IP20

25 000 h

200x200x35 mm



18W SURFACE PANEL

DL2663/DL2664/DL2665

18W

AC:95-265V

1500 lm

120°

WH/NW/WW

>80

IP20

25 000 h

250x250x35 mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

EAN Code 4500K

EAN Code 2800K

3800156626577

3800156626584

3800156626591

3800156626607

3800156626614

3800156626621

3800156626638

3800156626645

3800156626652

LED SURFACE PANELS

OPTONICA



A+



150°
BEAM ANGLE



SAVE 80%
ENERGY



IP20

6W



480
LUMENS

12W



960
LUMENS

18W



1440
LUMENS

24W



1920
LUMENS

SURFACE PANEL SQUARE

OUTER INSTALLATION

DL2237 White Light 6000K
DL2251 Neutral White 4500K
DL2238 Warm White 2800K

DL2252 White Light 6000K
DL2253 Neutral White 4500K
DL2254 Warm White 2800K

DL2241 White Light 6000K
DL2255 Neutral White 4500K
DL2242 Warm White 2800K

DL2256 White Light 6000K
DL2257 Neutral White 4500K
DL2258 Warm White 2800K

6W SURFACE PANEL

12W SURFACE PANEL

18W SURFACE PANEL

24W SURFACE PANEL

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension

DL2237/DL2251/DL2238	DL2252/DL2253/DL2254	DL2241/DL2255/DL2242	DL2256/DL2257/DL2258
6W	12W	18W	24W
AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
480 lm	960 lm	1440 lm	1920 lm
150°	150°	150°	150°
WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
>80	>80	>80	>80
IP20	IP20	IP20	IP20
25 000 h	25 000 h	25 000 h	25 000 h
120x120x35 mm	167x167x35 mm	220x220x35 mm	295x295x35 mm



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156622371
3800156622517
3800156622388

3800156622524
3800156622531
3800156622548

3800156622418
3800156622555
3800156622425

3800156622562
3800156622579
3800156622586



LED SURFACE PANELS

OPTONICA



A+



150°
BEAM ANGLE



SAVE
80%
ENERGY



IP20

6W



12W



18W



24W



SURFACE PANEL ROUND

OUTER INSTALLATION

DL2231 White Light 6000K
DL2243 Neutral White 4500K
DL2232 Warm White 2800K

DL2244 White Light 6000K
DL2245 Neutral White 4500K
DL2246 Warm White 2800K

DL2235 White Light 6000K
DL2247 Neutral White 4500K
DL2236 Warm White 2800K

DL2248 White Light 6000K
DL2249 Neutral White 4500K
DL2250 Warm White 2800K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

6W SURFACE PANEL

DL2231/DL2243/DL2232

6W

AC:220-240V

480 lm

150°

WH/NW/WW

>80

IP20

25 000 h

φ120x38 mm



12W SURFACE PANEL

DL2244/DL2245/DL2246

12W

AC:220-240V

960 lm

150°

WH/NW/WW

>80

IP20

25 000 h

φ172x38 mm



18W SURFACE PANEL

DL2235/DL2247/DL2236

18W

AC:220-240V

1440lm

150°

WH/NW/WW

>80

IP20

25 000 h

φ225x38 mm



24W SURFACE PANEL

DL2248/DL2249/DL2250

24W

AC:220-240V

1920 lm

150°

WH/NW/WW

>80

IP20

25 000 h

φ300x38 mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

3800156622319

EAN Code 4500K

3800156622432

EAN Code 2800K

3800156622326

3800156622449

3800156622456

3800156622463

3800156622357

3800156622470

3800156622364

3800156622487

3800156622494

3800156622500

LED SURFACE PANELS

OPTONICA



A+



120°
BEAM ANGLE



SAVE
80%
ENERGY



IP65

8W



640

LUMENS

12W



900

LUMENS

24W



1800

LUMENS

LED SURFACE PANELS

THERMOPLASTIC-Waterproof

DL2280	White Light	6000K	DL2283	White Light	6000K	DL2286	White Light	6000K
DL2281	Neutral White	4500K	DL2284	Neutral White	4500K	DL2287	Neutral White	4500K
DL2282	Warm White	2800K	DL2285	Warm White	2800K	DL2288	Warm White	2800K

8W LED SURFACE PANEL

12W LED SURFACE PANEL

24W LED SURFACE PANEL

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

DL2280/DL2281/DL2282

8W

AC:180-265V

640 lm


120°

WH/NW/WW

>80

IP65

25 000 h



DL2283/DL2284/DL2285

12W

AC:180-265V

900 lm


120°

WH/NW/WW

>80

IP65

25 000 h



DL2286/DL2287/DL2288

24W

AC:180-265V

1800 lm


120°

WH/NW/WW

>80

IP65

25 000 h



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

3800156622807

EAN Code 4500K

3800156622814

EAN Code 2800K

3800156622821

3800156622838

3800156622845

3800156622852

3800156622869

3800156622876

3800156622883

LED SURFACE PANELS

OPTONICA



A+



BEAM ANGLE



ENERGY



IP20

15W



LUMENS

24W



LUMENS

LED SURFACE PANELS

THERMOPLASTIC

DL2270 White Light 6000K
DL2271 Neutral White 4500K
DL2272 Warm White 2800K



DL2273 White Light 6000K
DL2274 Neutral White 4500K
DL2275 Warm White 2800K

15W LED SURFACE PANEL

24W LED SURFACE PANEL

SKU No.	DL2270/DL2271/DL2272	DL2273/DL2274/DL2275
Watts	15W	24W
Input Voltage	AC:180-265V	AC:180-265V
Flux	1200 lm	2250 lm
Beam Angle	120°	120°
Light Color	WH/NW/WW	WH/NW/WW
CRI	>80	>80
IP Rating	IP20	IP20
Life Span	25 000 h	25 000 h

Dimension



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156622708
3800156622715
3800156622722

3800156622739
3800156622746
3800156622753



LED CEILING LIGHT

OPTONICA



EPISTAR
Chip Set



BEAM ANGLE



ENERGY



IP20

LED SUSPENDING LIGHT PF>0.95
SANDY WHITE ROUND

LED SUSPENDING LIGHT PF>0.95
SANDY WHITE SQUARE

	38W SANDY WHITE ROUND	50W SANDY WHITE ROUND	38W SANDY WHITE SQUARE	50W SANDY WHITE SQUARE
SKU No.	PD9036	PD9037	DP9038	PD9039
Watts	38W	50W	38W	50W
Input Voltage	AC:175-240V	AC:175-240V	AC:175-240V	AC:175-240V
Flux	2660 lm	3500 lm	2660 lm	3500 lm
Beam Angle	120°	120°	120°	120°
Light Color	WW	WW	WW	WW
CRI	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ450x1200mm	φ600x1200mm	450x450x1200mm	600x600x1200mm

Warm White
WW 3000K

Color temperature

EAN Code 3000K

3800156690363

3800156690370

3800156690387

3800156690394

LED CEILING LIGHT

OPTONICA



LED SUSPENDING LIGHT 38W PF>0.95
SANDY BLACK SQUARE

⚡ Watts	38W	☀ CRI	>80
🔌 Input Voltage	AC:175-240V	💧 IP Rating	IP20
☀ Flux	1900lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	450x450x1200mm



SKU No.

Warm White
PD9035 3000K

Color temperature



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156690356



LED ROUND CEILING LIGHT 38W PF>0.95
SANDY WHITE SQUARE

⚡ Watts	38W	☀ CRI	>80
🔌 Input Voltage	AC:175-240V	💧 IP Rating	IP20
☀ Flux	1900 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	450x450x100mm



SKU No.

Warm White
DL2297 3000K

Color temperature



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156622975

LED CEILING LIGHT

OPTONICA



⚡ Watts	40W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	2800 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ460x80mm

Remote Control
included



SKU No.

White Light
6000K

DL2290

to

Warm White
3000K

Color temperature



COLOR CHANGING LED 3000 to 6000K



LED CEILING LIGHT 40W PF>0.95

MATT WHITE+DOTTY SPARKLE

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE




DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622906

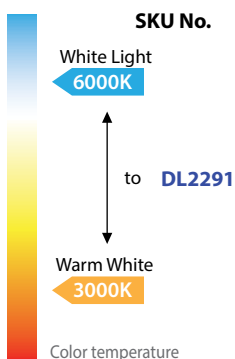

Remote Control
included



⚡ Watts	40W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	2800 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ460x80mm



COLOR CHANGING LED 3000 to 6000K



LED CEILING LIGHT 40W PF>0.95

MATT WHITE GLASS

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE



DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622913



LED CEILING LIGHT

OPTONICA



⚡ Watts	60W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	3900 lm	⌚ Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ570x85mm



COLOR CHANGING LED 3000 to 6000K




Remote Control included



SKU No.

White Light 6000K

DL2292



Warm White 3000K

Color temperature

LED CEILING LIGHT 60W PF>0.95

MATT WHITE+DOTTY SPARKLE

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE




DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622920

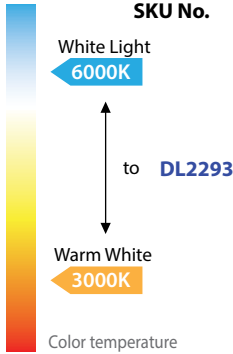

Remote Control included



⚡ Watts	60W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	3900 lm	⌚ Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ570x80mm



COLOR CHANGING LED 3000 to 6000K



LED CEILING LIGHT 60W PF>0.95

MATT WHITE GLASS

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE



DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622937

LED CEILING LIGHT

OPTONICA



⚡ Watts	36W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	2340 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ600x130mm



SKU No.

Warm White
DL2294 3000K
Color temperature

LED ROUND CEILING LIGHT 36W PF>0.95

SANDY WHITE



2340



120°



SAVE 80%



IP20

EAN Code 3000K 3800156622944

SKU No.

⚡ Watts	60W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	3900 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ800x130mm



LED ROUND CEILING LIGHT 60W PF>0.95

SANDY WHITE

Warm White
3000K DL2295

Color temperature



3900



120°



SAVE 80%



IP20

EAN Code 3000K 3800156622951



LED CEILING LIGHT

OPTONICA



⚡ Watts	26W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	1640 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ400x100mm



SKU No.

Warm White
DL2298 3000K

Color temperature

LED ROUND CEILING LIGHT 26W PF>0.95

SANDY WHITE



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156622982

SKU No.

⚡ Watts	145W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	9425 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ1000x130mm



Warm White
3000K DL2299

Color temperature

LED ROUND CEILING LIGHT 145W PF>0.95

SANDY WHITE



LUMENS



BEAM ANGLE



ENERGY



IP20



EAN Code 3000K 3800156622999

LED CEILING LIGHT

OPTONICA



⚡ Watts	36W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	2340 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ600x1200mm

EPISTAR
Chip Set



SKU No.

Warm White
PD9031 3000K
Color temperature

LED SUSPENDING LIGHT 36W PF>0.95

SANDY WHITE



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156690318

SKU No.

⚡ Watts	60W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	3900 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	φ800x1200mm

EPISTAR
Chip Set



LED SUSPENDING LIGHT 60W PF>0.95

SANDY WHITE



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156690325

LED CEILING LIGHT

OPTONICA



⚡ Watts	26W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	1640 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	φ400x1300mm

SKU No.



Warm White
PD9033 3000K
Color temperature

LED SUSPENDING LIGHT 26W PF>0.95

SANDY WHITE



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156690332

SKU No.

⚡ Watts	145W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	9425 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	φ1000x1120mm

LED SUSPENDING LIGHT 145W PF>0.95

SANDY WHITE

Warm White
3000K PD9034

Color temperature



LUMENS



BEAM ANGLE



ENERGY



IP20

EAN Code 3000K 3800156690349

LED CEILING LIGHT

OPTONICA



Watts	40W	CRI	>80
Input Voltage	AC:175-240V	IP Rating	IP20
Flux	2800 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	φ460x80mm


Remote Control
included



SKU No.

White Light
6000K

DL2279



Warm White
3000K

Color temperature



COLOR CHANGING LED 3000 to 6000K



LED CEILING LIGHT 40W PF>0.95

MATT WHITE+DOTTY SPARKLE

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE




DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622791

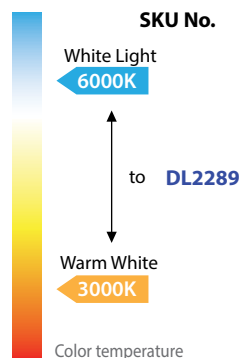

Remote Control
included



Watts	40W	CRI	>80
Input Voltage	AC:175-240V	IP Rating	IP20
Flux	2800 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	φ460x80mm



COLOR CHANGING LED 3000 to 6000K



LED CEILING LIGHT 40W PF>0.95

MATT WHITE GLASS

COLOR CHANGING LED 3000 to 6000K



LUMENS



BEAM ANGLE



DIMMABLE



IP20

EAN Code 3000K-6000K 3800156622890

LED SURFACE LIGHT

OPTONICA



LED WALL LIGHT 8W PF>0.95

SANDY WHITE

⚡ Watts	8W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	520 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	155x80x35mm



SKU No.

Warm White
DL2296 2800K

Color temperature



LUMENS



BEAM ANGLE




ENERGY




IP20

EAN Code 3000K 3800156622937

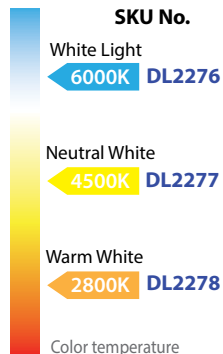

⚡ Watts	15W	☀ CRI	>80
⌚ Input Voltage	AC:175-240V	💧 IP Rating	IP20
💡 Flux	1200 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	φ248x45mm



LED SURFACE PANEL 15W

ROUND - PIR SENSOR



EAN Code 6000K 3800156622760
EAN Code 4500K 3800156622777
EAN Code 2700K 3800156622784



LUMENS



BEAM ANGLE



ENERGY



IP20

LED DOWNLIGHTS

OPTONICA




12W COB SURFACE
DOWNLIGHT ROUND

⚡ Watts	12W	☀ CRI	>80
⚙ Input Voltage	AC:200-240V	💧 IP Rating	IP20
☀ Flux	960 lm	🕒 Life Span	25 000 h
📐 Beam Angle	60°	📏 Dimension	φ118x50mm

A+
EQ.Watts:
12W=75W

SKU No.	
White Light	
CB2261	6000K
Neutral White	
CB2265	4500K
Warm White	
CB2262	2800K

Color temperature



EAN Code 6000K [3800156622616](#)
EAN Code 4500K [3800156622654](#)
EAN Code 2700K [3800156622623](#)




12W COB SURFACE
DOWNLIGHT SQUARE

⚡ Watts	12W	☀ CRI	>80
⚙ Input Voltage	AC:200-240V	💧 IP Rating	IP20
☀ Flux	960 lm	🕒 Life Span	25 000 h
📐 Beam Angle	60°	📏 Dimension	118x118x50mm

A+
EQ.Watts:
12W=75W

SKU No.	
White Light	
CB2263	6000K
Neutral White	
CB2266	4500K
Warm White	
CB2264	2800K


Color temperature



EAN Code 6000K [3800156622630](#)
EAN Code 4500K [3800156622661](#)
EAN Code 2700K [3800156622647](#)

LED DOWNLIGHTS


OPTONICA

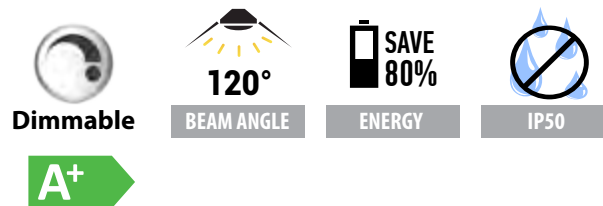


LED DOWNLIGHT Dimmable

COLOR CHANGING LED 3000 to 6000K

REMOTE CONTROL AC6324 – NOT INCLUDED

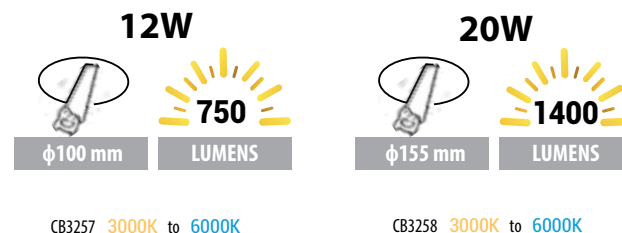

	12W LED Downlight	20W LED Downlight
SKU No.	CB3257	CB3258
Watts	12W	20W
Input Voltage	AC:175-265V	AC:175-265V
Flux	750 lm	1400 lm
Beam Angle	120°	120°
Light Color	3000 to 6000K	3000 to 6000K
CRI	>80	>80
IP Rating	IP50-Dust Protected	IP50-Dust Protected
Life Span	25 000 h	25 000 h
Dimension	φ120×87 mm	φ181×105 mm
EAN Code 3000-6000K	3800156632578	3800156632585



REMOTE CONTROL
FOR DIMMABLE LED DOWNLIGHT
AC6324



- 2.4 GHZ
- Remote 4 Groups
- up to 50 pcs per Group

LED RECESSED PANELS

OPTONICA



COLOR CHANGING KNOB : 3000-4500-6000K



100°
BEAM ANGLE



SAVE
80%
ENERGY




IP44

CCT-Recessed LED PANELS

COLOR CHANGING LED 3000-4500-6000K

ROUND SLIM

A+




DL2590 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2591 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2592 COLOR CHANGING LIGHT

3000K - 4500K - 6000K




DL2593 COLOR CHANGING LIGHT

3000K - 4500K - 6000K

- SKU No.**
- Watts**
- Input Voltage**
- Flux**
- Beam Angle**
- Light Color**
- CRI**
- IP Rating**
- Life Span**
- Dimension**
- Cutting Size**

6W Recessed Panel	12W Recessed Panel	18W Recessed Panel	24W Recessed Panel
DL2590	DL2591	DL2592	DL2593
6W	12W	18W	24W
AC:165-265V	AC:165-265V	AC:165-265V	AC:165-265V
480 lm	960 lm	1800 lm	1920 lm
100°	100°	100°	100°
WH-NW-WW	WH-NW-WW	WH-NW-WW	WH-NW-WW
>80	>80	>80	>80
IP44 Front	IP44 Front	IP44 Front	IP44 Front
25 000 h	25 000 h	25 000 h	25 000 h
φ115x32 mm	φ170x32 mm	φ220x32 mm	φ240x32 mm
φ105mm 	φ155mm 	φ205mm 	φ225mm 

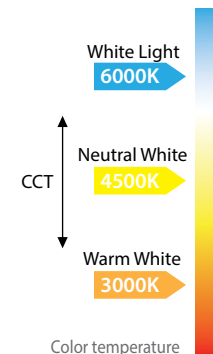

EAN Code

3800156625907

3800156625914

3800156625921

3800156625938

LED RECESSED PANELS

OPTONICA

NEW



COLOR CHANGING KNOB : 3000-4500-6000K



100°
BEAM ANGLE



SAVE
80%
ENERGY



IP44

CCT-Recessed LED PANELS

COLOR CHANGING LED 3000-4500-6000K

SQUARE SLIM

A+




DL2594 COLOR CHANGING LIGHT

3000K - 4500K - 6000K




DL2595 COLOR CHANGING LIGHT

3000K - 4500K - 6000K



DL2596 COLOR CHANGING LIGHT

3000K - 4500K - 6000K




DL2597 COLOR CHANGING LIGHT

3000K - 4500K - 6000K

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension
- Cutting Size

6W Recessed Panel	12W Recessed Panel	18W Recessed Panel	24W Recessed Panel
DL2594	DL2595	DL2596	DL2597
6W	12W	18W	24W
AC:165-265V	AC:165-265V	AC:165-265V	AC:165-265V
480 lm	960 lm	1440 lm	1920 lm
100°	100°	100°	100°
WH-NW-WW	WH-NW-WW	WH-NW-WW	WH-NW-WW
>80	>80	>80	>80
IP44 Front	IP44 Front	IP44 Front	IP44 Front
25 000 h	25 000 h	25 000 h	25 000 h
120x120x32 mm	170x170x32 mm	220x220x32 mm	220x220x32 mm
105x105mm	155x155mm	205x205mm	205x205mm
			
EAN Code	EAN Code	EAN Code	EAN Code
3800156625945	3800156625952	3800156625969	3800156625976

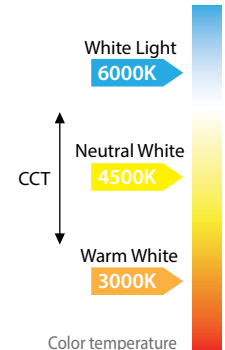

LED RECESSED PANELS

OPTONICA



EPISTAR
Chip Set

A+



120°
BEAM ANGLE



PF > 0.9



EMC APPROVED



IP20

3W



155
LUMENS

6W



420
LUMENS

12W



960
LUMENS

18W



1440
LUMENS

24W




1920
LUMENS

LED MINI PANELS PF>0.9 ROUND RECESSED MODULE

DL2550 White Light 6000K	DL2553 White Light 6000K	DL2556 White Light 6000K	DL2559 White Light 6000K	DL2562 White Light 6000K
DL2551 Neutral White 4500K	DL2554 Neutral White 4500K	DL2557 Neutral White 4500K	DL2560 Neutral White 4500K	DL2563 Neutral White 4500K
DL2552 Warm White 2800K	DL2555 Warm White 2800K	DL2558 Warm White 2800K	DL2561 Warm White 2800K	DL2564 Warm White 2800K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	24W MINI PANEL
SKU No.	DL2550/DL2551/DL2552	DL2553/DL2554/DL2555	DL2556/DL2557/DL2558	DL2559/DL2560/DL2561	DL2562/DL2563/DL2564
Watts	3W	6W	12W	18W	24W
Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V
Flux	155 lm	420 lm	960 lm	1440 lm	1920 lm
Beam Angle	120°	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ85x25 mm	φ120x25 mm	φ170x25 mm	φ225x25 mm	φ299x25 mm
Cutting Size	φ75mm	φ110mm	φ155mm	φ205mm	φ285mm
EAN Code 6000K	3800156625501	3800156625532	3800156625563	3800156625594	3800156625624
EAN Code 4500K	3800156625518	3800156625549	3800156625570	3800156625600	3800156625631
EAN Code 2800K	3800156625525	3800156625556	3800156625587	3800156625617	3800156625648



LED RECESSED PANELS

OPTONICA



BEAM ANGLE



PF > 0.9



EMC APPROVED



IP20

3W



LUMENS

6W



LUMENS

12W



LUMENS

18W



LUMENS

24W




LUMENS

LED MINI PANELS PF>0.9 SQUARE RECESSED MODULE

DL2565 White Light 6000K	DL2568 White Light 6000K	DL2571 White Light 6000K	DL2574 White Light 6000K	DL2577 White Light 6000K
DL2566 Neutral White 4500K	DL2569 Neutral White 4500K	DL2572 Neutral White 4500K	DL2575 Neutral White 4500K	DL2578 Neutral White 4500K
DL2567 Warm White 2800K	DL2570 Warm White 2800K	DL2573 Warm White 2800K	DL2576 Warm White 2800K	DL2579 Warm White 2800K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	24W MINI PANEL
SKU No.	DL2565/DL2566/DL2567	DL2568/DL2569/DL2570	DL2571/DL2572/DL2573	DL2574/DL2575/DL2576	DL2577/DL2578/DL2579
Watts	3W	6W	12W	18W	24W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
Flux	155 lm	420 lm	960 lm	1440 lm	1920 lm
Beam Angle	120°	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	90x90x20mm	120x120x20 mm	167x167x20 mm	225x225x20 mm	300x300x25 mm
Cutting Size	75x75mm	110x110mm	155x155mm	205x205mm	282x282mm
EAN Code 6000K	3800156625655	3800156625686	3800156625716	3800156625747	3800156625778
EAN Code 4500K	3800156625662	3800156625693	3800156625723	3800156625754	3800156625785
EAN Code 2800K	3800156625679	3800156625709	3800156625730	3800156625761	3800156625792



LED RECESSED PANELS

OPTONICA

NEW



Built-in Driver

A+



120°

BEAM ANGLE



SAVE 80%

ENERGY



IP20

6W



375

LUMENS

DL2621 White Light **6000K**

DL2622 Neutral White **4500K**

DL2623 Warm White **2800K**

12W



940

LUMENS

DL2624 White Light **6000K**

DL2625 Neutral White **4500K**

DL2626 Warm White **2800K**

18W



1500

LUMENS

DL2627 White Light **6000K**

DL2628 Neutral White **4500K**

DL2629 Warm White **2800K**

LED MINI PANELS

BUILT-IN DRIVER

ROUND RECESSED MODULE

-  **SKU No.**
-  **Watts**
-  **Input Voltage**
-  **Flux**
-  **Beam Angle**
-  **Light Color**
-  **CRI**
-  **IP Rating**
-  **Life Span**
-  **Dimension**
-  **Cutting Size**

6W MINI PANEL

DL2621/DL2622/DL2623

6W

AC:95-265V

375 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ118x33 mm

φ100mm



12W MINI PANEL

DL2624/DL2625/DL2626

12W

AC:95-265V

940 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ170x33 mm

φ150mm



18W MINI PANEL

DL2627/DL2628/DL2629

18W

AC:95-265V

1500 lm

120°

WH/NW/WW

>80

IP20

25 000 h

φ223x33 mm

φ200mm



White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K

EAN Code 4500K

EAN Code 2800K

3800156626218

3800156626225

3800156626232

3800156626249

3800156626256

3800156626263

3800156626270

3800156626287

3800156626294

LED RECESSED PANELS

OPTONICA

NEW



Built-in Driver

A+



120°
BEAM ANGLE



SAVE
80%
ENERGY



IP20

6W



375
LUMENS

DL2633 White Light 6000K
DL2634 Neutral White 4500K
DL2635 Warm White 2800K

12W



940
LUMENS

DL2636 White Light 6000K
DL2637 Neutral White 4500K
DL2638 Warm White 2800K

18W



1500
LUMENS

DL2639 White Light 6000K
DL2640 Neutral White 4500K
DL2641 Warm White 2800K

LED MINI PANELS

BUILT-IN DRIVER

SQUARE RECESSED MODULE

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension
- Cutting Size

6W MINI PANEL

DL2633/DL2634/DL2635

6W

AC:95-265V

375 lm

120°

WH/NW/WW

>80

IP20

25 000 h

118x118x33 mm

100x100mm



12W MINI PANEL

DL2636/DL2637/DL2638

12W

AC:95-265V

940 lm

120°

WH/NW/WW

>80

IP20

25 000 h

170x170x33 mm

150x150mm



18W MINI PANEL

DL2639/DL2640/DL2641

18W

AC:95-265V

1500 lm

120°

WH/NW/WW

>80

IP20

25 000 h

223x223x33 mm

200x200mm



EAN Code 6000K

3800156626331

EAN Code 4500K

3800156626348

EAN Code 2800K

3800156626355

3800156626362


3800156626379

3800156626386

3800156626393

3800156626409

3800156626416



LED RECESSED PANELS

OPTONICA

A+



120°
BEAM ANGLE



SAVE
80%
ENERGY



IP20



3W



LUMENS

6W



LUMENS

12W



LUMENS

18W



LUMENS

24W



LUMENS

LED MINI PANELS ROUND RECESSED MODULE

DL2431 White Light 6000K
DL2432 Neutral White 4500K
DL2433 Warm White 2800K

DL2434 White Light 6000K
DL2435 Neutral White 4500K
DL2436 Warm White 2800K

DL2437 White Light 6000K
DL2438 Neutral White 4500K
DL2439 Warm White 2800K

DL2335 White Light 6000K
DL2440 Neutral White 4500K
DL2336 Warm White 2800K

DL2441 White Light 6000K
DL2442 Neutral White 4500K
DL2443 Warm White 2800K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	24W MINI PANEL
 SKU No.	DL2431/DL2432/DL2433	DL2434/DL2435/DL2436	DL2437/DL2438/DL2439	DL2335/DL2440/DL2336	DL2441/DL2442/DL2443
 Watts	3W	6W	12W	18W	24W
 Input Voltage	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V	AC:85-265V
 Flux	195 lm	390 lm	780 lm	1170 lm	1625 lm
 Beam Angle	120°	120°	120°	120°	120°
 Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
 CRI	>80	>80	>80	>80	>80
 IP Rating	IP20	IP20	IP20	IP20	IP20
 Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
 Dimension	φ85x25 mm 	φ120x25 mm 	φ170x25 mm 	φ225x25 mm 	φ299x25 mm 
 Cutting Size	φ75mm 	φ110mm 	φ155mm 	φ205mm 	φ285mm 
EAN Code 6000K	3800156624313	3800156624344	3800156624375	3800156623354	3800156624412
EAN Code 4500K	3800156624320	3800156624351	3800156624382	3800156624405	3800156624429
EAN Code 2800K	3800156624337	3800156624368	3800156624399	3800156623361	3800156624436



LED RECESSED PANELS

OPTONICA



A+



120°
BEAM ANGLE



SAVE
80%
ENERGY



IP20

3W



195
LUMENS

6W



390
LUMENS

12W



780
LUMENS

18W



1170
LUMENS

24W



1625
LUMENS

LED MINI PANELS SQUARE RECESSED MODULE

DL2444 White Light 6000K
DL2445 Neutral White 4500K
DL2446 Warm White 2800K

DL2447 White Light 6000K
DL2448 Neutral White 4500K
DL2449 Warm White 2800K

DL2450 White Light 6000K
DL2451 Neutral White 4500K
DL2452 Warm White 2800K

DL2348 White Light 6000K
DL2453 Neutral White 4500K
DL2349 Warm White 2800K

DL2454 White Light 6000K
DL2455 Neutral White 4500K
DL2456 Warm White 2800K

	3W MINI PANEL	6W MINI PANEL	12W MINI PANEL	18W MINI PANEL	24W MINI PANEL
SKU No.	DL2444/DL2445/DL2446	DL2447/DL2448/DL2449	DL2450/DL2451/DL2452	DL2348/DL2453/DL2349	DL2454/DL2455/DL2456
Watts	3W	6W	12W	18W	24W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
Flux	195 lm	390 lm	780 lm	1170 lm	1625 lm
Beam Angle	120°	120°	120°	120°	120°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80	>80
IP Rating	IP20	IP20	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	90x90x20mm	120x120x20 mm	167x167x20 mm	225x225x20 mm	300x300x25 mm
Cutting Size	75x75mm	110x110mm	155x155mm	205x205mm	282x282mm
EAN Code 6000K	3800156624443	3800156624474	3800156624504	3800156623484	3800156624542
EAN Code 4500K	3800156624450	3800156624481	3800156624511	3800156623538	3800156624559
EAN Code 2800K	3800156624467	3800156624498	3800156624528	3800156623491	3800156624566

White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature



COLOR CHANGING KNOB : 3000-4500-6000K



100°
BEAM ANGLE



IP44

Recessed LED Slim DownLight

COLOR CHANGING LED 3000 to 6000K

ROUND MODULE - Dimmable



DL2581 3000K to 6000K



DL2582 3000K to 6000K



DL2583 3000K to 6000K




DL2584 3000K to 6000K



DL2585 3000K to 6000K

	6W Recessed LED	9W Recessed LED	16W Recessed LED	20W Recessed LED	24W Recessed LED
SKU No.	DL2581	DL2582	DL2583	DL2584	DL2585
Watts	6W	9W	16W	20W	24W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	450 lm	650 lm	1200 lm	1800 lm	2100 lm
Beam Angle	100°	100°	100°	100°	100°
Light Color	3000-6000K	3000-6000K	3000-6000K	3000-6000K	3000-6000K
CRI	>80	>80	>80	>80	>80
IP Rating	IP44 Front	IP44 Front	IP44 Front	IP44 Front	IP44 Front
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	φ115x32mm	φ115x32mm	φ170x32mm	φ220x32mm	φ240x32mm
Cutting Size	φ105mm 	φ105mm 	φ155mm 	φ205mm 	φ225mm 



EAN Code 3000-6000K

3800156625815

3800156625822

3800156625839

3800156625846

3800156625853

LED RECESSED PANELS



SKU No.

OT5001 Surface 3' D105 for 6W - 9W
Compatible with DL2581 , DL2582

OT5002 Surface 5' D155 for 12W - 16W
Compatible with DL2583

OT5003 Surface 7' D205 for 18W - 20W
Compatible with DL2584

OT5004 Surface 8' D225 for 22W - 24W
Compatible with DL2585

Recessed LED DownLight Adapter

From RECESSED Panel to SURFACE Panel

MODULES/ MINI PANES DIMMABLE DRIVERS

	SKU No.
DIMMABLE DRIVER 220V 5-9*1W 300MA	AC6025
DIMMABLE DRIVER 220V 10-18*1W 300MA	AC6026
DIMMABLE DRIVER 220V 20-30*1W 300MA	AC6027



Dimmable




LED PANELS

OPTONICA



Watts	25W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	3000 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm



A+
SDCD<6
UGR<19

SKU No.

White Light
DL2723 6000K

Neutral White
DL2724 4500K

Warm White
DL2725 2800K

Color temperature

25W LED PANEL WITH DRIVER PF>0.9




EAN Code 6000K 3800156627239

EAN Code 4500K 3800156627246

EAN Code 2800K 3800156627253

SKU No.
White Light
6000K DL2720
Neutral White
4500K DL2721
Warm White
2800K DL2722
Color temperature



A+
SDCD<6
UGR<19

Watts	25W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	3000 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm



6 PCS BOX



EAN Code 6000K 3800156627208

EAN Code 4500K 3800156627215

EAN Code 2800K 3800156627222



25W LED PANEL 6PCS BOX WITH DRIVER PF>0.9

LED PANELS


OPTONICA



Watts	40W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	4800 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm




A+
UGR<19



SKU No.	White Light
DL2726	6000K
	Neutral White
DL2727	4500K
	Warm White
DL2728	2800K
	Color temperature


40W LED PANEL

WITH DRIVER PF>0.9



EAN Code 6000K 3800156627260
EAN Code 4500K 3800156627277
EAN Code 2800K 3800156627284

SKU No.	White Light
DL2388	6000K
	Neutral White
DL2389	4500K
	Warm White
DL2390	2800K
	Color temperature



Watts	25W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	1920 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	295x595mm

A+



EAN Code 6000K 3800156623880
EAN Code 4500K 3800156623897
EAN Code 2800K 3800156623903




24W LED PANEL WITH DRIVER

LED PANELS

OPTONICA




⚡ Watts	36W	☀ CRI	>80
⚙ Input Voltage	AC:175-265V	💧 IP Rating	IP20
💡 Flux	2880 lm	⌚ Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	595x595mm



A+


SKU No.	Color temperature
DL2350	White Light 6000K
DL2363	Neutral White 4500K
DL2351	Warm White 2800K

36W LED PANEL WITH DRIVER



EAN Code 6000K [3800156623507](#)
 EAN Code 4500K [3800156623637](#)
 EAN Code 2800K [3800156623514](#)

SKU No.	Color temperature
DL2356	White Light 6000K
DL2358	Neutral White 4500K
DL2357	Warm White 2800K




⚡ Watts	48W	☀ CRI	>80
⚙ Input Voltage	AC:200-240V	💧 IP Rating	IP20
💡 Flux	3840 lm	⌚ Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	295x1195mm

A+



EAN Code 6000K [3800156623569](#)
 EAN Code 4500K [3800156623583](#)
 EAN Code 2800K [3800156623576](#)




48W LED PANEL WITH DRIVER

LED PANELS

OPTONICA



Watts	48W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	3840 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm



A+

SKU No.

White Light
DL2367-S 6000K

Neutral White
DL2368-S 4500K

Warm White
DL2369-S 2800K

Color temperature

48W LED PANEL WITH DRIVER




EAN Code 6000K 3800156623675

EAN Code 4500K 3800156623682

EAN Code 2800K 3800156623699



Watts	48W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	3840 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm



A+

2 PCS BOX

SKU No.

White Light
DL2367 6000K

Neutral White
DL2368 4500K

Warm White
DL2369 2800K

Color temperature

48W LED PANEL 2PCS BOX WITH DRIVER



EAN Code 6000K 3800156623675

EAN Code 4500K 3800156623682

EAN Code 2800K 3800156623699

LED PANELS


OPTONICA



Watts	45W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	3300-3600 lm	Life Span	25 000 h
Beam Angle	120°	Dimension	595x595mm

A+

2 PCS BOX



SKU No.

White Light
DL2372 6000K

Neutral White
DL2373 4500K

Warm White
3300lm DL2374 2800K

Color temperature

45W LED PANEL WITH DRIVER PF>0.9



EAN Code 6000K 3800156623729

EAN Code 4500K 3800156623736

EAN Code 2800K 3800156623743

SKU No.

White Light
6000K DL2375

Neutral White
4500K DL2376

Warm White
2800K DL2377 3300lm

Color temperature

Watts	45W	CRI	>80
Input Voltage	AC:175-265V	IP Rating	IP20
Flux	3300-3600lm	Life Span	25 000 h
Beam Angle	120°	Dimension	295x1195mm

A+

2 PCS BOX



EAN Code 6000K 3800156623750

EAN Code 4500K 3800156623767

EAN Code 2800K 3800156623774




45W LED PANEL WITH DRIVER PF>0.9

LED PANELS

OPTONICA



⚡ Watts	48W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
💡 Flux	3840 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	595x595mm



SKU No.

White Light
DL2711 6000K

Neutral White
DL2712 4500K

Warm White
DL2713 2800K

Color temperature

48W LED PANEL WITH DRIVER PF>0.9



LUMENS



BEAM ANGLE




IP20

EAN Code 6000K [3800156623729](#)

EAN Code 4500K [3800156623736](#)

EAN Code 2800K [3800156623743](#)

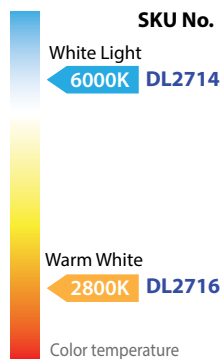

SKU No.

White Light
6000K DL2714

Warm White
2800K DL2716

Color temperature



⚡ Watts	48W	☀ CRI	>80
⌚ Input Voltage	AC:175-265V	💧 IP Rating	IP20
💡 Flux	3840 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	120°	📏 Dimension	595x595mm



EAN Code 6000K [3800156623750](#)

EAN Code 2800K [3800156623774](#)



LUMENS



BEAM ANGLE



IP20

48W LED PANEL WITH DRIVER PF>0.9

SKU No. **AC6013**

-  Output voltage 45-65V DC
-  Input Voltage AC:180-265V
-  IP Rating IP20
-  Dimension 140x45x30mm



DIMMABLE DRIVER FOR LED PANEL 48W
710mA 45-63V DC

SKU No. **AC6024**

-  Output voltage 30-40V DC
-  Input Voltage AC:180-265V
-  IP Rating IP20
-  Dimension 140x45x30mm



DIMMABLE DRIVER FOR LED PANEL 48W
1100mA 30-40V DC

ACCESSORIES FOR HANGING



SKU No.
OT5182

Stainless steel cable



SKU No.
OT5188

Clips for LED Panel



LED PANEL FRAMES



SKU No. **OT5195**

 Dimension **300x300mm**

SKU No. **OT5198**

 Dimension **600x600mm**



SKU No. **OT5196**

 Dimension **600x300mm**

SKU No. **OT5197**


 Dimension **1200x300mm**

LED DOWNLIGHTS

OPTONICA



Watts	30W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2400 lm	Life Span	25 000 h
Beam Angle	90°	Dimension	235x146x140 mm



A+

SKU No.



White Light
CB3230 6000K

Neutral White
CB3232 4500K

Warm White
CB3231 2800K

Color temperature

30W COB DOWNLIGHT RECTANGULAR




EAN Code 6000K 3800156632301
EAN Code 4500K 3800156632325
EAN Code 2800K 3800156632318



WHITE
BODY

Watts	5W	CRI	>80
Input Voltage	AC:185-265V	IP Rating	IP20
Flux	360 lm	Life Span	25 000 h
Beam Angle	38°	Dimension	φ86x54mm



A+

SKU No.


White Light
CB3281 6000K

Neutral White
CB3282 4500K

Warm White
CB3283 2800K

Color temperature

5W COB DOWNLIGHT ROUND, ROTATABLE



EAN Code 6000K 3800156632813
EAN Code 4500K 3800156632820
EAN Code 2800K 3800156632837


LED DOWNLIGHTS

OPTONICA



WHITE
BODY

Watts	8W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ95x55mm



A+

SKU No.

White Light
CB3201 6000K

Neutral White
CB3206 4500K


Warm White
CB3202 2800K

Color temperature

8W COB DOWNLIGHT ROUND, ROTABLE



LUMENS



BEAM ANGLE

CUTTING SIZE



φ80 mm

ADJUSTABLE ANGLE



45°



IP20

EAN Code 6000K 3800156632011

EAN Code 4500K 3800156632066

EAN Code 2800K 3800156632028


SKU No.

White Light
6000K CB3203

Neutral White
4500K CB3205

Warm White
2800K CB3204

Color temperature



A+

Watts	8W	CRI	>80
Input Voltage	AC:185-265V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ95x55mm



INOX
BODY


EAN Code 6000K 3800156632035

EAN Code 4500K 3800156632059

EAN Code 2800K 3800156632042



LUMENS



BEAM ANGLE

CUTTING SIZE



φ80 mm

ADJUSTABLE ANGLE



45°



IP20

8W COB DOWNLIGHT ROUND, ROTABLE


LED DOWNLIGHTS

OPTONICA



WHITE
BODY

Watts	8W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	100x100x70mm



A+

SKU No.



White Light
CB3207 6000K

Neutral White
CB3222 4500K

Warm White
CB3212 2800K

Color temperature



8W COB DOWNLIGHT SQUARE, ROTATABLE



EAN Code 6000K 3800156632073

EAN Code 4500K 3800156632226

EAN Code 2800K 3800156632127

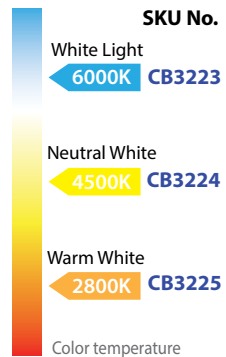

A+

Watts	8W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	640 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	100x100x70mm





INOX
BODY

EAN Code 6000K 3800156632233

EAN Code 4500K 3800156632240

EAN Code 2800K 3800156632257



8W COB DOWNLIGHT SQUARE, ROTATABLE

LED DOWNLIGHTS

OPTONICA



A+

SAVE
80%
ENERGY

IP20

20W



φ140 mm

1500

LUMENS

30W



φ165mm

2400

LUMENS

40W



φ200 mm

3200

LUMENS

LED COB DOWNLIGHT

SQUARE

CB3234 Neutral Light 4500K

CB3235 Neutral Light 4500K

CB3236 Neutral Light 4500K


20W COB DOWNLIGHT Rotatable

30W COB DOWNLIGHT


40W COB DOWNLIGHT

- SKU No.
- Watts
- Input Voltage
- Flux
- Beam Angle
- Light Color
- CRI
- IP Rating
- Life Span
- Dimension


SKU No.	CB3234	CB3235	CB3236
Watts	20W	30W	40W
Input Voltage	AC:180-265V	AC:180-265V	AC:180-265V
Flux	1500 lm	2400 lm	3200 lm
Beam Angle	72°	90°	110°
Light Color	NW	NW	NW
CRI	>80	>80	>80
IP Rating	IP20	IP20	IP20
Life Span	25 000 h	25 000 h	25 000 h




3800156632349



3800156632356



3800156632363




EAN Code 4500K

LED DOWNLIGHTS

OPTONICA



Watts	12W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ115x42mm



A+

SKU No.



White Light
CB3251 6000K

Neutral White
CB3252 4500K

Warm White
CB3253 2800K

Color temperature

12W COB DOWNLIGHT ROUND, ADJUSTABLE



EAN Code 6000K 3800156632516

EAN Code 4500K 3800156632523

EAN Code 2800K 3800156632530


SKU No.

White Light
6000K CB3254

Neutral White
4500K CB3255

Warm White
2800K CB3256

Color temperature



A+



Watts	12W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	960 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	115x115x42mm



EAN Code 6000K 3800156632547

EAN Code 4500K 3800156632554

EAN Code 2800K 3800156632561




12W COB DOWNLIGHT SQUARE, ADJUSTABLE

LED DOWNLIGHTS

OPTONICA



⚡ Watts	25W	☀️ CRI	>80
⌚ Input Voltage	AC:200-240V	🔒 IP Rating	IP20
💡 Flux	2200 lm	🕒 Life Span	25 000 h
📐 Beam Angle	60°	📏 Dimension	φ182x102mm



SKU No.

White Light
CB3241 6000K

Neutral White
CB3242 4500K

Color temperature

A+

25W COB DOWNLIGHT ROUND, ADJUSTABLE



LUMENS



BEAM ANGLE

CUTTING SIZE





φ160 mm



IP20

EAN Code 6000K 3800156632417

EAN Code 4500K 3800156632424

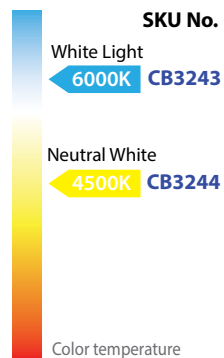

A+

⚡ Watts	35W	☀️ CRI	>80
⌚ Input Voltage	AC:200-240V	🔒 IP Rating	IP20
💡 Flux	3000 lm	🕒 Life Span	25 000 h
📐 Beam Angle	80°	📏 Dimension	φ231×125mm



EAN Code 6000K 3800156632431

EAN Code 4500K 3800156632448



LUMENS



BEAM ANGLE

CUTTING SIZE



φ210 mm



IP20

35W COB DOWNLIGHT ROUND, ADJUSTABLE

LED DOWNLIGHTS

OPTONICA



A+



BEAM ANGLE



ENERGY



IP20

15W



φ155mm

1200

LUMENS

20W



φ165 mm

1600

LUMENS

30W



φ195 mm

2500

LUMENS

LED COB DOWNLIGHT

TÜV

CB3270 White Light 6000K
CB3271 Neutral White 4500K
CB3272 Warm White 2700K

CB3273 White Light 6000K
CB3274 Neutral White 4500K
CB3275 Warm White 2700K

CB3276 White Light 6000K
CB3277 Neutral White 4500K
CB3278 Warm White 2700K

15W LED COB DOWNLIGHT

20W LED COB DOWNLIGHT

30W LED COB DOWNLIGHT

SKU No.

CB3270/CB3271/CB3272

CB3273/CB3274/CB3275

CB3276/CB3277/CB3278

Watts

15W

20W

30W

Input Voltage

AC:180-265V

AC:180-265V

AC:180-265V

Flux

1200 lm

1600 lm

2500 lm

Beam Angle

145°

145°

145°

Light Color

WH/NW/WW

WH/NW/WW

WH/NW/WW

CRI

>80

>80

>80

IP Rating

IP20

IP20

IP20




Life Span

25 000 h

25 000 h

25 000 h

Dimension



EAN Code 6000K

3800156632707

3800156632738

3800156632769

EAN Code 4500K

3800156632714

3800156632745

3800156632776

EAN Code 2800K

3800156632721

3800156632752

3800156632783

White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K


Color temperature

LED DOWNLIGHT

OPTONICA



Watts	40W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	4000 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ195x110mm



A+

SKU No.

White Light
CB3260 6000K

Neutral White
CB3261 4500K

Color temperature

40W COB DOWNLIGHT TÜV



LUMENS



BEAM ANGLE

CUTTING SIZE



φ175 mm



IP20

EAN Code 6000K 3800156632608


EAN Code 4500K 3800156632615

SKU No.

White Light
6000K CB3262

Neutral White
4500K CB3263

Color temperature



A+

Watts	60W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	5600 lm	Life Span	25 000 h
Beam Angle	60°	Dimension	φ231×125mm



EAN Code 6000K 3800156632622

EAN Code 4500K 3800156632639



LUMENS



BEAM ANGLE

CUTTING SIZE



φ205 mm



IP20

60W COB DOWNLIGHT TÜV

LED STRIPS

OPTONICA



Type LED	3528	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	4.8W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x8x2mm



A⁺
4.8W/m

SKU No.	Color :
ST4702	White Light 6000K
ST4703	Neutral White 4500K
ST4704	Warm White 2800K
ST4707	RED
ST4706	GREEN
ST4705	BLUE

LED STRIP 12V

Professional Edition

3528-NON WATERPROOF

60 SMD/m



LED/m



5M - Roll



IP20

Color : SKU No.

White Light
6000K

ST4710

Neutral White
4500K

ST4740

Warm White
2800K

ST4711

Color temperature

Type LED	3528	Flux per watt	50lm/W
LEDs/m	120 pcs	Beam Angle	120°
Power per meter	9.6W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x8x2mm

A⁺
9.6W/m



LED/m



5M - Roll



IP20

LED STRIP 12V

Professional Edition

3528-NON WATERPROOF

120 SMD/m



LED STRIPS

OPTONICA



Type LED	3528	Flux per watt	50lm/W
LEDs/m	204 pcs	Beam Angle	120°
Power per meter	16.5W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm



A+

16.5W/m

SKU No. Color :

ST4761

White Light
6000K

ST4762

Neutral White
4500K

ST4763

Warm White
2800K

Color temperature

LED STRIP 12V

Professional Edition

3528-NON WATERPROOF
204 SMD/m



Type LED	5050	Flux per watt	100lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x12x2mm

A+

14.4W/m



SKU No.

ST4313

RGB+WH



LED STRIP 12V

Professional Edition

5050-NON-WATERPROOF
60 SMD/m RGB



SKU No.

ST4314

RGB+WW



LED STRIPS

OPTONICA



Type LED	5050	Flux per watt	70lm/W
LEDs/m	30 pcs	Beam Angle	120°
Power per meter	7.2W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm

SKU No. **ST4311**

RGB



A+

7.2W/m

LED STRIP 12V

Professional Edition

5050 NON - WATERPROOF
30 SMD/m RGB



LED/m



5M - Roll



IP20

SKU No. **ST4315**

RGB



Type LED	5050	Flux per watt	70lm/W
LEDs/m	30 pcs	Beam Angle	120°
Power per meter	7.2W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x10x2.5mm

A+

7.2W/m



LED/m



5M - Roll



IP54

LED STRIP 12V

Professional Edition

5050-WATERPROOF
30 SMD/m RGB



LED STRIPS

OPTONICA



LED STRIP 12V

Professional Edition
5050 NON -WATERPROOF
60 SMD/m RGB

Type LED	5050	Flux per watt	70lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm

SKU No. ST4312

RGB



A+
14.4W/m



LED/m



5M - Roll



IP20

SKU No. ST4316

RGB



Type LED	5050	Flux per watt	70lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x10x2.5mm

LED STRIP 12V

Professional Edition
5050-WATERPROOF
60 SMD/m RGB

A+

14.4W/m



LED/m



5M - Roll



IP54



LED STRIPS

OPTONICA



Type LED	3528	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	4.8W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x8x2.5mm



A+
4.8W/m

SKU No.	Color :
ST4732	White Light 6000K
ST4731	Neutral White 4500K
ST4733	Warm White 2800K
ST4734	RED
ST4735	GREEN
ST4736	BLUE

LED STRIP 12V

Professional Edition
3528-WATERPROOF
60 SMD/m



LED STRIP 12V

Professional Edition
3528-WATERPROOF
120 SMD/m

Color : SKU No.

White Light
6000K ST4720

Warm White
2800K ST4721

Color temperature

Type LED	3528	Flux per watt	50lm/W
LEDs/m	120 pcs	Beam Angle	120°
Power per meter	9.6W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x8x2.5mm

A+
9.6W/m



LED STRIPS

OPTONICA



Type LED	5050	Flux per watt	50lm/W
LEDs/m	30 pcs	Beam Angle	120°
Power per meter	7.2W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm



A⁺
7.2W/m

SKU No.	Color :
ST4801	White Light 6000K
ST4800	Neutral White 4500K
ST4802	Warm White 2800K

Color temperature

LED STRIP 12V

Professional Edition

5050-NON WATERPROOF
30 SMD/m



LED/m



5M - Roll



IP20

Color : SKU No.

White Light 6000K	ST4807
Neutral White 4500K	ST4827
Warm White 2800K	ST4808
RED	ST4823
BLUE	ST4825

Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm

A⁺

14.4W/m



LED/m



5M - Roll



IP20

LED STRIP 12V

Professional Edition

5050-NON WATERPROOF
60 SMD/m



LED STRIPS

OPTONICA



Type LED	5050	Flux per watt	50lm/W
LEDs/m	30 pcs	Beam Angle	120°
Power per meter	7.2W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x10x2.5mm

SKU No. Color :

ST4809

White Light
6000K

ST4811

Neutral White
4500K

ST4810

Warm White
2800K

Color temperature



A+
7.2W/m

LED STRIP 12V

Professional Edition

5050-WATERPROOF
30 SMD/m



LED/m



5M - Roll



IP54

Color : SKU No.

White Light
6000K

ST4839

Neutral White
4500K

ST4841

Warm White
2800K

ST4840

Color temperature

Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP54
Voltage	DC: 12V	Dimension	5000x10x2.5mm

A+

14.4W/m



LED/m



5M - Roll



IP54

LED STRIP 12V

Professional Edition

5050-WATERPROOF
60 SMD/m



LED STRIPS

OPTONICA



Type LED	3014	Flux per watt	70lm/W
LEDs/m	120 pcs	Beam Angle	120°
Power per meter	12W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x8x2mm

SKU No. Color :

ST4901

White Light
6000K

ST4903

Neutral White
4500K

ST4902

Warm White
2800K

Color temperature



A+

12W/m

LED STRIP 12V

Professional Edition

3014-NON WATERPROOF

120 SMD/m



LED/m



5M - Roll



IP20

Color : SKU No.

White Light
6000K

ST4911

Neutral White
4500K

ST4913

Warm White
2800K

ST4912

Color temperature

Type LED	5630	Flux per watt	70lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	12W/m	IP Rating	IP20
Voltage	DC: 12V	Dimension	5000x10x2mm

A+

12W/m



LED/m



5M - Roll



IP20

LED STRIP 12V

Professional Edition

5630-NON WATERPROOF

60 SMD/m



LED STRIPS

OPTONICA



Type LED	2835	Flux per watt	105lm/W
LEDs/m	196 pcs	Beam Angle	120°
Power per meter	20W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x12x2mm

SKU No.	Color :
ST4421	White Light 6000K
ST4422	Neutral White 4500K
ST4423	Warm White 2800K

Color temperature



LED STRIP 24V

3 YEARS WARRANTY
2835-NON-WATERPROOF
196 SMD/m

2100 Lumens/ M	196 LED/m	5M - Roll	IP20
-------------------	--------------	-----------	------

Color : SKU No.

White Light
6000K ST4451

Neutral White
4500K ST4452

Warm White
2800K ST4453

Color temperature

Type LED	2835	Flux per watt	105lm/W
LEDs/m	196 pcs	Beam Angle	120°
Power per meter	20W/m	IP Rating	IP54
Voltage	DC: 24V	Dimension	5000x12x2.5mm



2100 Lumens/ M	196 LED/m	5M - Roll	IP54
-------------------	--------------	-----------	------

LED STRIP 24V

3 YEARS WARRANTY
2835-WATERPROOF
196 SMD/m



LED STRIPS

OPTONICA



Type LED	5054	Flux per watt	70lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	16W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x10x2mm

SKU No. Color :

ST4431

White Light
6000K

ST4432

Neutral White
4500K

ST4433

Warm White
2800K

Color temperature

A+
16W/m
DC: 24V



Lumens/ M



LED/m



5M - Roll



IP20

LED STRIP 24V

3 YEARS WARRANTY

5054-NON-WATERPROOF

60 SMD/m

Color : SKU No.

White Light
6000K

ST4461

Neutral White
4500K

ST4462

Warm White
2800K

ST4463

Color temperature

Type LED	5054	Flux per watt	70lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	16W/m	IP Rating	IP54
Voltage	DC: 24V	Dimension	5000x10x2.5mm

A+
16W/m
DC: 24V



Lumens/ M



LED/m



5M - Roll



IP54

LED STRIP 24V

3 YEARS WARRANTY

5054-WATERPROOF

60 SMD/m



LED STRIPS

OPTONICA



Type LED	3528	Flux per watt	50lm/W
LEDs/m	120 pcs	Beam Angle	120°
Power per meter	9.6W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x10x2mm



A+
9.6W/m
DC: 24V

SKU No.	Color :
ST4856	White Light 6000K
ST4857	Neutral White 4500K
ST4858	Warm White 2800K

Color temperature

LED STRIP 24V

Professional Edition
3528-NON-WATERPROOF
120 SMD/m



LED STRIP 24V

Professional Edition
5050-NON-WATERPROOF
60 SMD/m

Color :	SKU No.
White Light 6000K	ST4851
Neutral White 4500K	ST4850
Warm White 2800K	ST4852

Color temperature

Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x10x2mm

A+
14.4W/m
DC: 24V



LED STRIPS

OPTONICA



Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP54
Voltage	DC: 24V	Dimension	5000x10x3mm



A+
14.4W/m
DC: 24V

SKU No. Color :

ST4853 White Light
6000K

ST4854 Neutral White
4500K

ST4855 Warm White
2800K

Color temperature

LED STRIP 24V

Professional Edition

5050 - WATERPROOF

60 SMD/m



LED/m



5M - Roll



IP54

LED STRIP 24V

3 YEARS WARRANTY

Warm to Cool White CCT Adjustable

5025 - 60 SMD/m

Type LED	5025	Flux per watt	130lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	6W/m	IP Rating	IP20 : IP54
Voltage	DC: 24V	Dimension	5000x10x2mm



A+
6W/m
DC: 24V



IP20

SKU No. **ST4441**

2800k to 6000K Adjustable CT



IP54

SKU No. **ST4471**

2800k to 6000K Adjustable CT



Lumens/ M



LED/m



5M - Roll

LED STRIPS

OPTONICA



Type LED	5050 4in1	Flux per watt	100lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	6W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x12x2mm

SKU No.

ST4481

RGB+WH



A+
6W/m
DC: 24V



LED STRIP 24V
3 YEARS WARRANTY
NON-WATERPROOF
60 SMD/m RGB

SKU No.

ST4482

RGB+WW



SKU No.

ST4483

RGB+WH

Type LED	5050 4in1	Flux per watt	100lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	6W/m	IP Rating	IP54
Voltage	DC: 24V	Dimension	5000x12x3mm

LED STRIP 24V
3 YEARS WARRANTY
WATERPROOF
60 SMD/m RGB

A+
6W/m
DC: 24V



SKU No.

ST4484

RGB+WW



LED STRIPS

OPTONICA



Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP20
Voltage	DC: 24V	Dimension	5000x10x2mm

SKU No. **ST4861**

RGB



A+
14.4W/m
DC: 24V



LED STRIP 24V

Professional Edition

NON-WATERPROOF
60 SMD/m RGB



LED/m



5M - Roll



IP20

SKU No. **ST4862**

RGB



Type LED	5050	Flux per watt	50lm/W
LEDs/m	60 pcs	Beam Angle	120°
Power per meter	14.4W/m	IP Rating	IP54
Voltage	DC: 24V	Dimension	5000x10x3mm

LED STRIP 24V

Professional Edition

WATERPROOF
60 SMD/m RGB

A+
14.4W/m
DC: 24V



LED/m



5M - Roll



IP54

LED STRIPS 220V

OPTONICA



Type LED	5730	Flux per watt	50lm/W
LEDs/m	120 pcs	Beam Angle	120°
Power per meter	10W/m	IP Rating	IP44
Voltage	AC: 220V	Dimension	5000x10x2mm

SKU No. Color :

ST4611

White Light
6000K



ST4612

Warm White
2800K

Color temperature

LED STRIP 220V

LED Strip 5730 220V
120 SMD/m



A+

10W/m
AC: 220-240V

SKU No. AC6631

POWER CORD 220V STRIP
CABLE + CONNECTOR + PLUG



SKU No. AC6633

Middle connector for LED Strip 220V



SKU No. AC6632

LED Strip 220V FIXING



LED FLEX NEON

OPTONICA



Type LED	2835
LEDs/m	120 pcs
Power per meter	8.5W/m
Voltage	AC: AC220-240V
Beam Angle	120°
IP Rating	IP44
Dimension	5000x6x2mm



SKU No.	Color :
ST4581	White Light 6000K
ST4580	Neutral White 4500K
ST4582	Warm White 2800K
ST4584	RED
ST4585	GREEN
ST4583	BLUE
ST4587	YELLOW
ST4586	AMBER
ST4588	PINK
ST4589	RGB

LED FLEX NEON 220V

LED Strip 2835 220V
120 SMD/m



A+
8.5W/m
AC:220-240V

SKU No. AC6635
Power Connector
NEON FLEX Single color



SKU No. AC6636
Aluminum Rail-Single color



SKU No. AC6637
End cap for Single color Neon Flex



SKU No. AC6634
Splicer connector
Single color neon flex



SKU No. AC6638
Power Connector FLEX-NEON RGB

SKU No. AC6639
Aluminum Rail-RGB


SKU No. AC6640
End cap for RGB NEON-FLEX

LED STRIPS

OPTONICA



Type LED	2835
LEDs/m	60 pcs
Power per meter	7.2W/m
Voltage	DC: 12V
Beam Angle	120°
IP Rating	IP20
Dimension	5000x6x2mm



SKU No.	Color :
MO4541	White Light 6000K
MO4542	Warm White 3000K
MO4543	RED
MO4545	GREEN
MO4544	BLUE

S-Type LED STRIP 12V

Bendable

2835-NON-WATERPROOF
60 SMD/m



LED/m



5M - Roll



IP20

A+
7.2W/m
DC: 12V


S-Type LED STRIP 12V

Bendable

2835-WATERPROOF
60 SMD/m



Type LED	2835
LEDs/m	60 pcs
Power per meter	7.2W/m
Voltage	DC: 12V
Beam Angle	120°
IP Rating	IP65
Dimension	5000x6x3mm

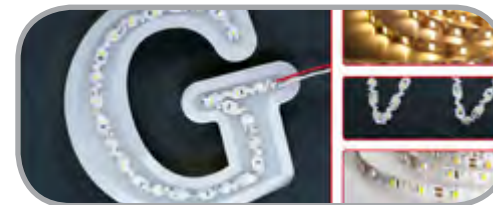

SKU No.	Color :
MO4551	White Light 6000K
MO4552	Warm White 3000K
MO4553	RED
MO4555	GREEN
MO4554	BLUE



LED/m



5M - Roll



IP65

A+
7.2W/m
DC: 12V

LED SMD MODULES

OPTONICA



Type LED	2835
LEDs/module	3 pcs
Power per module	1W
Voltage	DC: 12V
Beam Angle	160°
IP Rating	IP65
Dimension	58x12mm



SKU No.	Color :
MO4512	White Light 10000K
MO4511	6000K
MO4513	Warm White 3000K
MO4514	RED
MO4516	GREEN
MO4515	BLUE

LENS LED MODULE 1W

3x2835 Lens SMD LED

WATERPROOF



DC: 12V



Type LED	2835
LEDs/module	3 pcs
Power per module	1.5W
Voltage	DC: 12V
Beam Angle	160°
IP Rating	IP65
Dimension	75x15mm



SKU No.	Color :
MO4522	White Light 10000K
MO4521	6000K
MO4523	Warm White 3000K
MO4524	RED
MO4526	GREEN
MO4525	BLUE

LENS LED MODULE 1.5W

3x2835 Lens SMD LED

WATERPROOF



DC: 12V


LED SMD MODULES

OPTONICA





LED MODULE 0.36W
3x3014 SMD LED
WATERPROOF

Type LED	3014
LEDs/module	3 pcs
Power per module	0.36W
Voltage	DC: 12V
Beam Angle	120°
IP Rating	IP65
Dimension	18x8mm

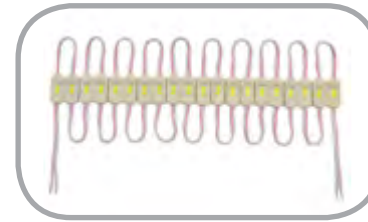

SKU No.	Color :
MO4531	White Light 6000K
MO4532	Warm White 3000K
MO4533	RED
MO4535	GREEN
MO4534	BLUE



LENS LED MODULE 2.4W
4x2835 Lens SMD LED Square
WATERPROOF

Type LED	2835
LEDs/module	4 pcs
Power per module	2.4W
Voltage	DC: 12V
Beam Angle	160°
IP Rating	IP65
Dimension	38x38mm



SKU No.	Color :
MO4561	White Light 6000K
MO4562	Warm White 3000K



LED SMD MODULES

OPTONICA



Type LED	5050
LEDs/module	3 pcs
Power per module	0.72W
Voltage	DC: 12V
Beam Angle	120°
IP Rating	IP65
Dimension	70x16mm



SKU No. **ST4563**

RGB



LED MODULE 0.72W

3x5050 RGB Lens SMD LED

WATERPROOF



120°
BEAM ANGLE




IP65

A+

DC: 12V

ALUMINIUM PROFILES FOR LED STRIPS

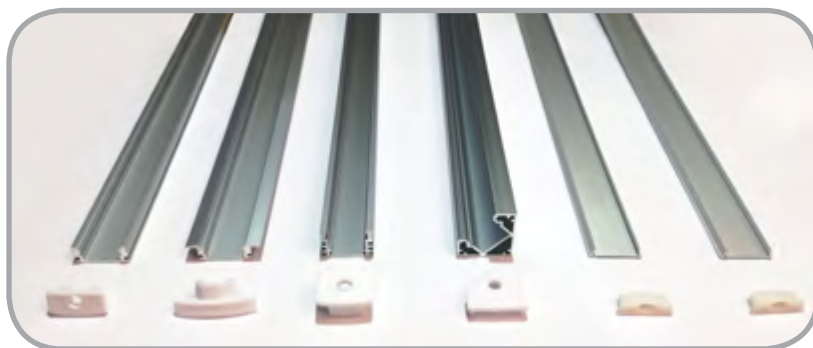

Flexible Profiles



SKU No.

- OT5190** 6mm - 1m
- OT5193** 6mm Build in - 1m
- OT5189** 10mm - 1m
- OT5194** 18mm Angle - 1m
- OT5002** 4mm - 1m Flexible
- OT5001** 4mm - 2m Flexible



Output
Voltage
12V



IP21



STRIP POWER SUPPLIES

PLASTIC 12V Output
1 YEAR WARRANTY

SKU No.	Watts	Output Voltage	Current	IP Rating	Dimension
AC6120	18W	DC:12V	1.5A	IP21	85x50x34mm
AC6101	24W	DC:12V	2A	IP21	85x50x34mm
AC6102	36W	DC:12V	3A	IP21	115x47x34mm
AC6103	60W	DC:12V	5A	IP21	122x55x34mm
AC6119	80W	DC:12V	6.5A	IP21	120x60x40mm



Output
Voltage

12V



IP67



STRIP POWER SUPPLIES

WATERPROOF METAL 12V Output

SKU No.	 Watts	 Output Voltage	 Current	 IP Rating	 Dimension
AC6110	30W	DC:12V	2.5A	IP67	202x30x20mm
AC6111	60W	DC:12V	5A	IP67	233x40x23mm
AC6115	100W	DC:12V	8.5A	IP67	175x70x43 mm
AC6112	150W	DC:12V	12.5A	IP67	205x72x43 mm

Output
Voltage

12V



IP21

STRIP POWER SUPPLIES

METAL 12V Output



SKU No.	 Watts	 Output Voltage	 Current	 IP Rating	 Dimension	
AC6104	24W	DC: 12V	2A	IP21	85x50x34 mm	
AC6121	36W	DC:12V	3A	IP21	85x37x34mm	
AC6105	60W	DC:12V	5A	IP21	110x78x38mm	
AC6109	100W	DC:12V	8.3A	IP21	160x98x42mm	
AC6106	120W	DC:12V	10A	IP21	160x98x42mm	
AC6114	150W	DC:12V	12.5A	IP21	200x99x42mm	
AC6117	250W	DC:12V	20A	IP21	260x102x65mm	
AC6108	360W	DC:12V	30A	IP21	200x100x52mm	With Fan
AC6124	500W	DC:12V	41.5A	IP21	214x113x49mm	With Fan

Output
Voltage

24V



IP21



STRIP POWER SUPPLIES

METAL 24V Output

SKU No.



Watts



Output Voltage



Current



IP Rating



Dimension

AC6154

60W

DC: 24V

2.5A

IP21

150x100x42mm

AC6151

100W

DC: 24V

4.2A

IP21

200x100x42mm

AC6155

150W

DC: 24V

6.25A

IP21

200x100x42mm

AC6152

250W

DC: 24V

10.5A

IP21

200x110x51mm

AC6153

360W

DC: 24V

15A

IP21

215x114x50mm

With Fan

Output
Voltage

12V



IP20

SlimLine



STRIP POWER SUPPLIES

METAL 12V Output

SKU No.	 Watts	 Output Voltage	 Current	 IP Rating	 Dimension	
AC6131	60W	DC: 12V	5A	IP20	170x45x38mm	
AC6132	100W	DC: 12V	8.5A	IP20	190x48x38mm	
AC6133	150W	DC: 12V	12.5A	IP20	207x63x43mm	
AC6134	250W	DC: 12V	20A	IP20	228x71x43mm	With Fan
AC6135	360W	DC: 12V	30A	IP20	228x71x43mm	With Fan

Output
Voltage

24V



IP20





STRIP POWER SUPPLIES

METAL 24V Output

SKU No.	 Watts	 Output Voltage	 Current	 IP Rating	 Dimension	
AC6161	60W	DC: 24V	2.5A	IP20	170x45x38mm	
AC6162	100W	DC: 24V	4.2A	IP20	190x48x38mm	
AC6163	150W	DC: 24V	6.25A	IP20	207x63x43mm	
AC6164	250W	DC: 24V	10.5A	IP20	228x71x43mm	With Fan
AC6165	360W	DC: 24V	15A	IP20	228x71x43mm	With Fan

DIMMER LED STRIP

WITH REMOTE CONTROL 8A



SKU No.	AC6302
⚡ Power	96W-192W
⌚ Voltage	12V-24V
💧 IP Rating	IP20
📏 Dimension	80x55x30 mm

REMOTE CONTROL LED STRIP

RGB - 16 BUTTONS 3x2A



SKU No.	AC6303
⚡ Power	72W
⌚ Voltage	12V
💧 IP Rating	IP20
📏 Dimension	50x35x20mm

REMOTE CONTROL LED STRIP

RGB - 4 BUTTONS 3x4A



SKU No.	AC6304
⚡ Power	144W-288W
⌚ Voltage	12V-24V
💧 IP Rating	IP20
📏 Dimension	105x65x20mm

REMOTE CONTROL LED STRIP

RGB - 44 BUTTONS



SKU No.	AC6306	AC6307
⚡ Power	72W	144W
⌚ Voltage	12V	12V
💧 IP Rating	IP20	IP20
📏 Dimension	50x35x20mm	50x35x20mm

LED CONTROLLERS

OPTONICA

WIFI CONTROLER

RGB / SINGLE COLOR 3x4A



SKU No.	AC6310	AC6311
Power	90-288W	90-288W
Voltage	7.5-24V	7.5-24V
IP Rating	IP20	IP20
Dimension	85x45x15mm	85x45x15mm

AMPLIFIER FOR LED STRIP

RGB+WHITE 4x6A



SKU No.	AC6328
Power	288W-576W
Voltage	12V-24V
IP Rating	IP20
Dimension	65x55x20 mm

AMPLIFIER FOR LED STRIP

RGB - IRON SHELL 3x8A



SKU No.	AC6326
Power	288W-576W
Voltage	12V-24V
IP Rating	IP20
Dimension	80x70x30 mm

AMPLIFIER FOR LED STRIP

RGB 3x4A



SKU No.	AC6305
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	80x55x20 mm

LED CONTROLLERS

OPTONICA

REMOTE CONTROL LED STRIP

RGB TOUCH MINI WHITE / BLACK 3X6A



SKU No.	AC6314	AC6315
⚡ Power	216W-432W	216W-432W
⌚ Voltage	12V-24V	12V-24V
🔒 IP Rating	IP20	IP20
📏 Dimension	95x50x30 mm	95x50x30 mm

REMOTE CONTROL LED STRIP

RGBW TOUCH 4X6A



SKU No.	AC6329
⚡ Power	288W-576W
⌚ Voltage	12V-24V
🔒 IP Rating	IP20
📏 Dimension	80x45x15

MUSIC LED CONTROLLER

WITH REMOTE CONTROL 3X4A



SKU No.	AC6312
⚡ Power	144W-288W
⌚ Voltage	12V-24V
🔒 IP Rating	IP20
📏 Dimension	170x85x23mm

DMX512 DECODER

3X4A



SKU No.	AC6308
⚡ Power	144W-288W
⌚ Voltage	12V-24V
🔒 IP Rating	IP20
📏 Dimension	160x60x42mm

SENSOR DIMMER

WALL MOUNTED 10A



SKU No.	AC6318
Power	120W-240W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm

SENSOR DIMMER

WALL MOUNTED WHITE 10A



SKU No.	AC6320
Power	120W-240W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm

SENSOR DIMMER

WALL MOUNTED WHITE 3x4A



SKU No.	AC6319
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm

SENSOR DIMMER

WALL MOUNTED BLACK 3x4A



SKU No.	AC6317
Power	144W-288W
Voltage	12V-24V
IP Rating	IP20
Dimension	85x85x40mm

LED CONTROLLERS

OPTONICA

RF LED DIMMING REMOTE 4 ZONES SINGLE COLOR



WALL MOUNTED HOLDER FOR
AC6341



SKU No.

AC6341

AC6346

Dimension

135x40x11mm

70x45x18mm

LED RGB/RGBW REMOTE 4 ZONES RF



WALL MOUNTED HOLDER FOR
AC6345



AC6345

AC6347

LED RGB/RGBW REMOTE 4 ZONES RF



AC6344

107x58x10mm

LED RGB/RGBW CONTROLLER 4 CHANNEL 4CH 4x5A V4 CONSTANT VOLTAGE



SKU No.

AC6342

- Power 4x(60-180)W
- Voltage 12V-36VDC
- IP Rating IP20
- Dimension 175x45x27mm

LED RGB/RGBW CONTROLLER 4 CHANNEL 4CH 4x300mA C4 CONSTANT CURRENT



SKU No.

AC6343

- Power 4x(3.6-14.4)W
- Voltage 12V-48VDC
- IP Rating IP20
- Dimension 170x85x23mm

ACCESSORIES FOR LED STRIPS



SKU No.	Description
OT5151	CONNECTOR FOR LED STRIP 3528
OT5152	CONNECTOT FOR LED STRIP 5050
AC6608	CONNECTOR FOR LED STRIP RGB
AC6619	ANGLE CONNECTOR FOR LED STRIP 3528 8mm
AC6620	ANGLE CONNECTOR FOR LED STRIP 5050 10mm
AC6621	ANGLE CONNECTOR FOR LED STRIP RGB 10mm
AC6610	CONNECTOR FOR LED STRIP DC MALE

SKU No.	Description
AC6611	CONNECTOR FOR LED STRIP DC FEMALE
AC6612	FLEXIBLE CONNECTOR FOR LED STRIP 3528 DC FEMALE
AC6613	FLEXIBLE CONNECTOR FOR LED STRIP 5050 DC FEMALE
AC6614	FLEXIBLE CONNECTOR FOR LED STRIP RGB
AC6615	FLEXIBLE CONNECTOR FOR LED STRIP 3528
AC6616	FLEXIBLE CONNECTOR FOR LED STRIP 5050
AC6618	FLEXIBLE CONNECTOR FOR LED STRIP RGB+WH
AC6617	FLEXIBLE CONNECTOR FOR RGB LED STRIP WITH PIN

USB Chargeable LED Touch Panel Remote Control

Single Color

SKU No.	AC6351
 Power	144W-288W
 Voltage	12V-24V
 IP Rating	IP20
 Dimension	86x86x13.5mm

Buid-in rechargeable Li-battery.
 USB rechargeable, stand by time: 6 months.
 Single color remote, RF 2.4G.
 Compatible with all of our receivers.
 Stick or screw on the wall(or cabinet)



USB Chargeable LED Touch Panel Remote Control

RGB / RGBW

SKU No.	AC6352
 Power	144W-288W
 Voltage	12V-24V
 IP Rating	IP20
 Dimension	86x86x13.5mm

Buid-in rechargeable Li-battery.
 USB rechargeable, stand by time: 6 months.
 RGB/RGBW remote, RF 2.4G.
 Compatible with all of our receivers.
 Stick or screw on the wall(or cabinet)



LED SINGLE COLOR DIMMING REMOTE CONTROL SET

RF 2.4G 3CH 3x4A V3

SKU No. **AC6348**

⚡ Power	144W-288W
⌚ Voltage	12V-24V
🌡 IP Rating	IP20



LED RGB DIMMING REMOTE CONTROL SET

RF 2.4G 3CH 3x4A V3

SKU No. **AC6349**

⚡ Power	144W-288W
⌚ Voltage	12V-24V
🌡 IP Rating	IP20



LED CCT Color Temperature Remote Control

4Zones RF 2.4G , BLACK

SKU No. **AC6350**

🌡 IP Rating	IP20
📏 Dimension	175x51x32mm

3 VDC,((AAA*2pcs)
4 zones RF CCT remote control
Match with 2 Channels receiver
RF2.4G, 30m control distance.




LED TRACK LIGHTS

OPTONICA



Watts	25W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2750 lm	Life Span	30 000 h
Beam Angle	24°	Dimension	70x120x175mm




SKU No.	White Light
FL5321	5000K
FL5322	4000K
FL5323	3000K
Color temperature	

25W COB TRACK LIGHT INTERIOR FLOODLIGHT FOR 4-LINE TRACK



EAN Code 5000K 3800156653214
EAN Code 4000K 3800156653221
EAN Code 3000K 3800156653238

SKU No.	White Light
5000K	FL5324
4000K	FL5325
3000K	FL5326
Color temperature	



Watts	35W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	3850 lm	Life Span	30 000 h
Beam Angle	24°	Dimension	φ90x130x165mm



EAN Code 5000K 3800156653245
EAN Code 4000K 3800156653252
EAN Code 3000K 3800156653269




35W COB TRACK LIGHT INTERIOR FLOODLIGHT FOR 4-LINE TRACK

LED TRACK LIGHTS

OPTONICA



⚡ Watts	25W	☀️ CRI	>80
⚙️ Input Voltage	AC:200-240V	💧 IP Rating	IP20
💡 Flux	2750 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	70x120x175mm




SKU No.	Color temperature
White Light FL5327 5000K	5000K
Neutral White FL5328 4000K	4000K
Warm White FL5329 3000K	3000K

25W COB TRACK LIGHT INTERIOR FLOODLIGHT FOR 4-LINE TRACK



EAN Code 5000K [3800156653276](#)
 EAN Code 4000K [3800156653283](#)
 EAN Code 3000K [3800156653290](#)

SKU No.	Color temperature
White Light FL5330 5000K	5000K
Neutral White FL5331 4000K	4000K
Warm White FL5332 3000K	3000K



⚡ Watts	25W	☀️ CRI	>80
⚙️ Input Voltage	AC:200-240V	💧 IP Rating	IP20
💡 Flux	3850 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	φ90x130x165mm



EAN Code 5000K [3800156653306](#)
 EAN Code 4000K [3800156653313](#)
 EAN Code 3000K [3800156653320](#)



35W COB TRACK LIGHT INTERIOR FLOODLIGHT FOR 4-LINE TRACK

LED TRACK LIGHTS


OPTONICA



⚡ Watts	12W	☀ CRI	>80
⌚ Input Voltage	AC:200-240V	💧 IP Rating	IP20
💡 Flux	960 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	φ98x130x110mm

A+

EPISTAR
Chip Set



SKU No.

White Light
FL5149 6000K

Neutral White
FL5120 4500K

Warm White
FL5126 2800K

Color temperature

12W COB TRACK LIGHT INTERIOR FLOODLIGHT



LUMENS



BEAM ANGLE



IP20

EAN Code 6000K 3800156651494

EAN Code 4500K 3800156651203

EAN Code 2800K 3800156651265


SKU No.

White Light
6000K FL5127

Neutral White
4500K FL5118

Warm White
2800K FL5117

Color temperature



⚡ Watts	12W	☀ CRI	>80
⌚ Input Voltage	AC:200-240V	💧 IP Rating	IP20
💡 Flux	960 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	φ98x130x110mm

A+

EPISTAR
Chip Set



EAN Code 6000K 3800156651272

EAN Code 4500K 3800156651180

EAN Code 2800K 3800156651173



LUMENS



BEAM ANGLE



IP20

12W COB TRACK LIGHT INTERIOR FLOODLIGHT

LED TRACK LIGHTS


OPTONICA



⚡ Watts	25W	☀️ CRI	>90
⚡ Input Voltage	AC:200-240V	💧 IP Rating	IP20
☀️ Flux	1650 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	φ98x130x110mm

A+

EPISTAR
Chip Set



SKU No.
White Light
FL5130 6000K

Neutral White
FL5128 4500K

Warm White
FL5135 2800K

Color temperature

25W COB TRACK LIGHT INTERIOR FLOODLIGHT



LUMENS



BEAM ANGLE



IP20

EAN Code 6000K 3800156651302

EAN Code 4500K 3800156651289

EAN Code 2800K 3800156651357


SKU No.

White Light
6000K FL5136

Neutral White
4500K FL5137

Warm White
2800K FL5138

Color temperature



⚡ Watts	25W	☀️ CRI	>90
⚡ Input Voltage	AC:200-240V	💧 IP Rating	IP20
☀️ Flux	1650 lm	🕒 Life Span	30 000 h
📐 Beam Angle	24°	📏 Dimension	φ98x130x110mm

A+

EPISTAR
Chip Set



EAN Code 6000K 3800156651364

EAN Code 4500K 3800156651371

EAN Code 2800K 3800156651388



LUMENS



BEAM ANGLE



IP20

25W COB TRACK LIGHT INTERIOR FLOODLIGHT

LED TRACK LIGHTS


OPTONICA



Watts	25W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2000 lm	Life Span	30 000 h
Beam Angle	24°	Dimension	φ98x170x145mm

A+

EPISTAR
Chip Set



SKU No.

White Light
FL5140 6000K

Neutral White
FL5148 4500K

Warm White
FL5147 2800K

Color temperature

25W COB TRACK LIGHT INTERIOR FLOODLIGHT



LUMENS



BEAM ANGLE



IP20

EAN Code 6000K 3800156651401

EAN Code 4500K 3800156651487

EAN Code 2800K 3800156651470


SKU No.

White Light
6000K FL5129

Neutral White
4500K FL5139

Warm White
2800K FL5119

Color temperature



Watts	25W	CRI	>80
Input Voltage	AC:200-240V	IP Rating	IP20
Flux	2000 lm	Life Span	30 000 h
Beam Angle	24°	Dimension	φ98x170x145mm

A+

EPISTAR
Chip Set



25W COB TRACK LIGHT INTERIOR FLOODLIGHT



LUMENS



BEAM ANGLE



IP20

EAN Code 6000K 3800156651296

EAN Code 4500K 3800156651395

EAN Code 2800K 3800156651197

LED TRACK LIGHTS

OPTONICA

FOR TRACK LINES 1 Phase

OT5157



OT5158



OT5160



OT5159



WHITE Track Line 1 Phase - 1m OT5153

WHITE Track Line 1 Phase - 2m OT5156



BLACK Track Line 1 Phase - 1m OT5154

BLACK Track Line 1 Phase - 2m OT5155

FOR TRACK LINES 3 Phase

OT5011-White
OT5012-Black



OT5013-White
OT5014-Black



OT5015-White
OT5016-Black



OT5017-White
OT5018-Black



OT5019-White
OT5020-Black



OT5021-White
OT5022-Black



OT5023-White
OT5024-Black



OT5025-White
OT5026-Black



WHITE Track Line 3 Phase 4 Lines - 1m OT5007

WHITE Track Line 3 Phase 4 Lines - 2m OT5008



BLACK Track Line 3 Phase 4 Lines - 1m OT5009

BLACK Track Line 3 Phase 4 Lines - 2m OT5010

LED FLOODLIGHTS

OPTONICA



Power Cable Length - 0.70m



BEAM ANGLE



IP65



HIGH LUMEN




LED SMD FLOODLIGHT PF>0.9

PREMIUM LINE - WHITE BODY

FL5865	White Light	6000K	FL5868	White Light	6000K	FL5871	White Light	6000K	FL5874	White Light	6000K	FL5877	White Light	6000K
FL5866	Neutral White	4500K	FL5869	Neutral White	4500K	FL5872	Neutral White	4500K	FL5875	Neutral White	4500K	FL5878	Neutral White	4500K
FL5867	Warm White	2800K	FL5870	Warm White	2800K	FL5873	Warm White	2800K	FL5876	Warm White	2800K	FL5879	Warm White	2700K

	10W SMD FLOODLIGHT	20W SMD FLOODLIGHT	30W SMD FLOODLIGHT	50W SMD FLOODLIGHT	100W SMD FLOODLIGHT	
SKU No.	FL5865/FL5866/FL5867	FL5868/FL5869/FL5870	FL5871/FL5872/FL5873	FL5874/FL5875/FL5876	FL5877/FL5878/FL5879	
Watts	10W	20W	30W	50W	100W	
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	
Flux	850 lm	1700 lm	2500 lm	4250 lm	8500 lm	
Beam Angle	150°	150°	150°	150°	150°	
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	
CRI	>80	>80	>80	>80	>80	
IP Rating	IP65	IP65	IP65	IP65	IP65	
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h	
Dimension	127x113x22mm	162x136x24mm	192x157x25mm	227x185x26mm	316x245x33mm	
EAN Code 6000K	3800156658653	3800156658684	3800156658714	3800156658745	3800156658776	
EAN Code 4500K	3800156658660	3800156658691	3800156658721	3800156658752	3800156658783	
EAN Code 2800K	3800156658677	3800156658707	3800156658738	3800156658769	3800156658790	



LED FLOODLIGHTS

OPTONICA



Power Cable Length - 0.70m




BEAM ANGLE



IP65



HIGH LUMEN



LED SMD FLOODLIGHT PF>0.9 PREMIUM LINE - BLACK BODY

FL5880	White Light	6000K	FL5883	White Light	6000K	FL5886	White Light	6000K	FL5889	White Light	6000K	FL5892	White Light	6000K
FL5881	Neutral White	4500K	FL5884	Neutral White	4500K	FL5887	Neutral White	4500K	FL5890	Neutral White	4500K	FL5893	Neutral White	4500K
FL5882	Warm White	2800K	FL5885	Warm White	2800K	FL5888	Warm White	2800K	FL5891	Warm White	2800K	FL5894	Warm White	2700K

	10W SMD FLOODLIGHT	20W SMD FLOODLIGHT	30W SMD FLOODLIGHT	50W SMD FLOODLIGHT	100W SMD FLOODLIGHT	
SKU No.	FL5880/FL5881/FL5882	FL5883/FL5884/FL5885	FL5886/FL5887/FL5888	FL5889/FL5890/FL5891	FL5892/FL5893/FL5894	
Watts	10W	20W	30W	50W	100W	
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	
Flux	850 lm	1700 lm	2500 lm	4250 lm	8500 lm	
Beam Angle	150°	150°	150°	150°	150°	
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW	
CRI	>80	>80	>80	>80	>80	
IP Rating	IP65	IP65	IP65	IP65	IP65	
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h	
Dimension	127x113x22mm	162x136x24mm	192x157x25mm	227x185x26mm	316x245x33mm	
EAN Code 6000K	3800156658806	3800156658837	3800156658868	3800156658899	3800156658929	
EAN Code 4500K	3800156658813	3800156658844	3800156658875	3800156658905	3800156658936	
EAN Code 2800K	3800156658820	3800156658851	3800156658882	3800156658912	3800156658943	



LED FLOODLIGHTS

OPTONICA



Power Cable Length - 1.00m



150°
BEAM ANGLE



IP65



A+



HIGH LUMEN

LED SMD FLOODLIGHT PF>0.9
PREMIUM LINE - WHITE BODY



150W
18000
LUMENS

FL5786 White Light 6000K
FL5787 Neutral White 4500K

200W
24000
LUMENS

FL5788 White Light 6000K
FL5789 Neutral White 4500K

300W
36000
LUMENS

FL5790 White Light 6000K
FL5791 Neutral White 4500K



SKU No.



Watts



Input Voltage



Flux



Beam Angle



Light Color



CRI



IP Rating



Life Span



Dimension

150W SMD LED FLOODLIGHT

FL5786/FL5787

150W

AC:100-240V

18 000 lm

150°

WH/NW

>80

IP65

25 000 h

367x305x51mm



200W SMD LED FLOODLIGHT

FL5788/FL5789

200W

AC:100-240V

24 000 lm

150°

WH/NW

>80

IP65

25 000 h

408x337x53mm



300W SMD LED FLOODLIGHT

FL5790/FL5791

300W

AC:100-240V

36 000 lm

150°


WH/NW

>80

IP65

25 000 h

540x400x50mm



Color temperature

EAN Code 6000K

EAN Code 4500K

3800156657861

3800156657878

3800156657885

3800156657892

3800156657908

3800156657915

LED FLOODLIGHTS

OPTONICA



Power Cable Length - 1.00m



150°
BEAM ANGLE



IP65



HIGH LUMEN

LED SMD FLOODLIGHT PF>0.9
PREMIUM LINE - BLACK BODY



150W
18000
LUMENS

FL5792 White Light 6000K
FL5793 Neutral White 4500K


200W
24000
LUMENS

FL5794 White Light 6000K
FL5795 Neutral White 4500K

300W
36000
LUMENS

FL5796 White Light 6000K
FL5797 Neutral White 4500K

	150W SMD LED FLOODLIGHT	200W SMD LED FLOODLIGHT	300W SMD LED FLOODLIGHT
SKU No.	FL5792/FL5793	FL5794/FL5795	FL5796/FL5797
Watts	150W	200W	300W
Input Voltage	AC:100-240V	AC:100-240V	AC:100-240V
Flux	18 000 lm	24 000 lm	36 000 lm
Beam Angle	150°	150°	150°
Light Color	WH/NW	WH/NW	WH/NW
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	367x305x51mm	408x337x53mm	540x400x50mm
EAN Code 6000K	3800156657922	3800156657946	3800156657960
EAN Code 4500K	3800156657939	3800156657953	3800156657977



LED FLOODLIGHTS

OPTONICA



BEAM ANGLE



ENERGY




IP66/65

LED SMD FLOODLIGHT

HIGH POWER



FL5443 White Light 6000K



FL5446 White Light 6000K
FL5445 Neutral White 4500K



FL5449 White Light 6000K



FL5447 White Light 6000K



FL5448 White Light 6000K



100W SMD FLOODLIGHT

FL5443

100W

AC:95-265V

8 000 lm

140°

WH

>80

IP66

25 000 h

335x300x70 mm



3800156654433

150W SMD FLOODLIGHT

FL5446/FL5445

150W

AC:95-265V

12 000 lm

120°

WH/NW

>80

IP66

25 000 h

385x300x160 mm



3800156654464
3800156654457

200W SMD FLOODLIGHT

FL5449

200W

AC:95-265V

16 000 lm

120°

WH

>80

IP65

25 000 h

423x320x150 mm



3800156654495

300W SMD FLOODLIGHT

FL5447

300W

AC:95-265V

24 000 lm

140°

WH

>80

IP65

25 000 h

597x327x188 mm



3800156654471

400W SMD FLOODLIGHT

FL5448

400W

AC:95-265V

32 000 lm

140°

WH

>80


IP65

25 000 h

670x325x190 mm



3800156654488



EAN Code 6000K
EAN Code 4500K

LED FLOODLIGHTS

OPTONICA



A⁺



120°
BEAM ANGLE



RGB



IP66

LED RGB FLOODLIGHT

WITH REMOTE CONTROL



10W



800
LUMENS

FL5210 RGB Light RGB

30W



2400
LUMENS

FL5212 RGB Light RGB

50W



4000
LUMENS

FL5233 RGB Light RGB

	10W RGB LED FLOODLIGHT	30W RGB LED FLOODLIGHT	50W RGB LED FLOODLIGHT
SKU No.	FL5210	FL5212	FL5233
Watts	10W	30W	50W
Input Voltage	AC:200-240V	AC:200-240V	AC:200-240V
Flux	800 lm	2400 lm	4000 lm
Beam Angle	120°	120°	120°
Light Color	RGB	RGB	RGB
CRI	>80	>80	>80
IP Rating	IP66	IP66	IP66
Life Span	25 000 h	25 000 h	25 000 h
Dimension	120x120x35 mm	224x183x110 mm	284x233x132mm

EAN Code RGB

3800156652101

3800156652125

3800156652330



100°
BEAM ANGLE



SAVE
80%
ENERGY



IP65

LED SMD FLOODLIGHT

CLASSIC LINE 2 WHITE

10W **850**
LUMENS

FL5801 White Light 6000K
FL5802 Neutral White 4500K
FL5803 Warm White 2700K

20W **1700**
LUMENS

FL5804 White Light 6000K
FL5805 Neutral White 4500K
FL5806 Warm White 2700K

30W **2550**
LUMENS

FL5807 White Light 6000K
FL5808 Neutral White 4500K
FL5809 Warm White 2700K

	10W SMD LED FLOODLIGHT	20W SMD LED FLOODLIGHT	30W SMD LED FLOODLIGHT
SKU No.	FL5801/FL5802/FL5803	FL5804/FL5805/FL5806	FL5807/FL5808/FL5809
Watts	10W	20W	30W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
Flux	850 lm	1700 lm	2550 lm
Beam Angle	100°	100°	100°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	115x112x27 mm	150x145x27 mm	180x172x32 mm



EAN Code 6000K

3800156658011

EAN Code 4500K

3800156658028

EAN Code 2800K

3800156658035

3800156658042

3800156658059

3800156658066

3800156658073

3800156658080

3800156658097



A+



100°
BEAM ANGLE



SAVE
80%
ENERGY



IP65

50W **4250**
LUMENS

100W **8500**
LUMENS

FL5810 White Light 6000K
FL5811 Neutral White 4500K
FL5812 Warm White 2700K

FL5816 White Light 6000K
FL5817 Neutral White 4500K

LED SMD FLOODLIGHT

CLASSIC LINE 2 WHITE

	50W SMD LED FLOODLIGHT	100W SMD LED FLOODLIGHT
SKU No.	FL5810/FL5811/FL5812	FL5816/FL5817
Watts	50W	100W
Input Voltage	AC:170-265V	AC:170-265V
Flux	4250 lm	8500lm
Beam Angle	100°	100°
Light Color	WH/NW/WW	WH/NW
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	115x112x27 mm	180x172x32 mm

White Light
WH 6000K

Neutral White
NW 4500K

Warm White
WW 2800K

Color temperature

EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156658103
3800156658110
3800156658127

3800156658165
3800156658172



BEAM ANGLE



ENERGY



IP65



10W

850

LUMENS



20W

1700

LUMENS



30W

2550

LUMENS

FL5821 White Light 6000K
FL5822 Neutral White 4500K
FL5823 Warm White 2700K

FL5824 White Light 6000K
FL5825 Neutral White 4500K
FL5826 Warm White 2700K

FL5827 White Light 6000K
FL5828 Neutral White 4500K
FL5829 Warm White 2700K

LED SMD FLOODLIGHT

CLASSIC LINE 2 BLACK

	10W SMD LED FLOODLIGHT	20W SMD LED FLOODLIGHT	30W SMD LED FLOODLIGHT
SKU No.	FL5821/FL5822/FL5823	FL5824/FL5825/FL5826	FL5827/FL5828/FL5829
Watts	10W	20W	30W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
Flux	850 lm	1700 lm	2550 lm
Beam Angle	100°	100°	100°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	115x112x27 mm	150x145x27 mm	180x172x32 mm



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156658219
3800156658226
3800156658233

3800156658240
3800156658257
3800156658264

3800156658271
3800156658288
3800156658295

LED FLOODLIGHTS

OPTONICA



A⁺

100°
BEAM ANGLE

SAVE
80%
ENERGY

IP65

50W 4250
LUMENS

70W 5950
LUMENS

100W 8500
LUMENS

LED SMD FLOODLIGHT

CLASSIC LINE 2 BLACK

FL5830 White Light 6000K
FL5831 Neutral White 4500K
FL5832 Warm White 2800K

FL5833 White Light 6000K

FL5836 White Light 6000K
FL5837 Neutral White 4500K

	50W SMD LED FLOODLIGHT	70W SMD LED FLOODLIGHT	100W SMD LED FLOODLIGHT
SKU No.	FL5830/FL5831/FL5832	FL5833	FL5836/FL5837
Watts	50W	70W	100W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V
Flux	4250 lm	5950 lm	8500 lm
Beam Angle	100°	100°	100°
Light Color	WH/NW/WW	WH	WH/NW
CRI	>80	>80	>80
IP Rating	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h
Dimension	115x112x27 mm	150x145x27 mm	180x172x32 mm



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156658301
3800156658318
3800156658325


3800156658332

3800156658363
3800156658370



LED FLOODLIGHTS

OPTONICA



LED SMD FLOODLIGHT WITH SENSOR CLASSIC LINE 2 WHITE

10W **850**
LUMENS

FL5841 White Light **6000K**
FL5842 Neutral White **4500K**
FL5843 Warm White **2700K**

20W **1700**
LUMENS

FL5844 White Light **6000K**
FL5845 Neutral White **4500K**
FL5846 Warm White **2700K**

30W **2550**
LUMENS

FL5847 White Light **6000K**
FL5848 Neutral White **4500K**
FL5849 Warm White **2700K**

50W **4500**
LUMENS

FL5850 White Light **6000K**
FL5851 Neutral White **4500K**
FL5852 Warm White **2700K**

	10W SMD LED FLOODLIGHT	20W SMD LED FLOODLIGHT	30W SMD LED FLOODLIGHT	50W SMD LED FLOODLIGHT
SKU No.	FL5841/FL5842/FL5843	FL5844/FL5845/FL5846	FL5847/FL5848/FL5849	FL5850/FL5851/FL5852
Watts	10W	20W	30W	50W
Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
Flux	850 lm	1700 lm	2550 lm	4500 lm
Beam Angle	100°	100°	100°	100°
Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
CRI	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	135x113x30 mm 	168x150x30 mm 	180x178x35 mm 	203x214x35 mm 



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156658417
3800156658424
3800156658431

3800156658448
3800156658455
3800156658462

3800156658479
3800156658486
3800156658493

3800156658509
3800156658516
3800156658523

LED FLOODLIGHTS

OPTONICA



100°
BEAM ANGLE



MOTION
PIR
SENSOR



IP65



10W

850
LUMENS

20W

1700
LUMENS

30W

2550
LUMENS

50W

4500
LUMENS

FL5853 White Light 6000K
FL5854 Neutral White 4500K
FL5855 Warm White 2700K


FL5856 White Light 6000K
FL5857 Neutral White 4500K
FL5858 Warm White 2700K

FL5859 White Light 6000K
FL5860 Neutral White 4500K
FL5861 Warm White 2700K

FL5862 White Light 6000K
FL5863 Neutral White 4500K

LED SMD FLOODLIGHT WITH SENSOR CLASSIC LINE 2 BLACK

	10W SMD LED FLOODLIGHT	20W SMD LED FLOODLIGHT	30W SMD LED FLOODLIGHT	50W SMD LED FLOODLIGHT
 SKU No.	FL5853/FL5854/FL5855	FL5856/FL5857/FL5858	FL5859/FL5860/FL5861	FL5862/FL5863
 Watts	10W	20W	30W	50W
 Input Voltage	AC:170-265V	AC:170-265V	AC:170-265V	AC:170-265V
 Flux	850 lm	1700 lm	2550 lm	4500 lm
 Beam Angle	100°	100°	100°	100°
 Light Color	WH/NW/WW	WH/NW/WW	WH/NW/WW	WH/NW/WW
 CRI	>80	>80	>80	>80
 IP Rating	IP65	IP65	IP65	IP65
 Life Span	25 000 h	25 000 h	25 000 h	25 000 h
 Dimension	135x113x30 mm 	168x150x30 mm 	180x178x35 mm 	203x214x35 mm 



EAN Code 6000K
EAN Code 4500K
EAN Code 2800K

3800156658530
3800156658547
3800156658554

3800156658561
3800156658578
3800156658585

3800156658592
3800156658608
3800156658615

3800156658622
3800156658639


LED WALL WASHERS

OPTONICA



⚡ Watts	9W	☀ CRI	>80
⌚ Input Voltage	AC:180-265V	💧 IP Rating	IP65
💡 Flux	960 lm	🕒 Life Span	25 000 h
📐 Beam Angle	15°	📏 Dimension	495x58x50 mm

A+



SKU No.
White Light
WW7134 6000K

Warm White
WW7131 2700K

Color temperature

9W WALL WASHER 9*1 LED CHIP



EAN Code 6000K 3800156671348

EAN Code 2700K 3800156671317

SKU No.
White Light
6000K WW7135


Warm White
2700K WW7132

Color temperature



⚡ Watts	18W	☀ CRI	>80
⌚ Input Voltage	AC:180-265V	💧 IP Rating	IP65
💡 Flux	1440 lm	🕒 Life Span	25 000 h
📐 Beam Angle	15°	📏 Dimension	998x58x50 mm

A+



18W WALL WASHER 18*1 LED CHIP



EAN Code 6000K 3800156671355

EAN Code 2700K 3800156671324




LED WALL WASHERS

OPTONICA



⚡ Watts	36W	☀️ CRI	>80
⌚ Input Voltage	AC:180-265V	💧 IP Rating	IP65
💡 Flux	2880 lm	🕒 Life Span	25 000 h
📐 Beam Angle	15°	📏 Dimension	988x58x50 mm

A+



SKU No.
White Light
WW7136 6000K

Warm White
WW7133 2700K

Color temperature

36W WALL WASHER 36*1 LED CHIP



EAN Code 6000K 3800156671362

EAN Code 2700K 3800156671331




SKU No.
WW7116



⚡ Watts	18W	☀️ CRI	>80
⌚ Input Voltage	DC: 24V	💧 IP Rating	IP65
💡 Flux	1440 lm	🕒 Life Span	25 000 h
📐 Beam Angle	15°	📏 Dimension	998x58x40 mm

A+

EPISTAR
Chip Set



18W WALL WASHER 18*1 EPISTAR CHIP



EAN Code RGB 3800156671164

LED WALL WASHERS

OPTONICA



SKU No.	WW7121
Watts	36W
Input Voltage	AC:220-240V
Flux	2880 lm
Beam Angle	15°
IP Rating	IP67
Life Span	25 000 h
Dimension	495x58x50 mm

A+

36W WALL WASHER

Square

WW7121 Warm White 2700K



SKU No.	WW7122
Watts	48W
Input Voltage	AC:220-240V
Flux	3840 lm
Beam Angle	15°
IP Rating	IP67
Life Span	25 000 h
Dimension	495x58x50 mm

A+

48W WALL WASHER

Square

WW7121 Warm White 2700K



Watts	3W	CRI	>70
Input Voltage	AC:180-265V	IP Rating	IP67
Flux	240 lm	Life Span	25 000 h
Beam Angle	15°	Dimension	495x58x50 mm

A+

SKU No.

Warm White
WW7123 2700K

Color temperature

3W SPOT LIGHT



LUMENS



BEAM ANGLE



IP67

EAN Code 2700K 3800156671232

LED WALL WASHERS

OPTONICA



A+



15°
BEAM ANGLE



SAVE
80%
ENERGY



IP67

9W



WW7126 Warm White 2700K

10W



WW7127 Warm White 2700K

12W



WW7128 Warm White 2700K

LED WALL WASHER

	LED WALL WASHER 9W	LED WALL WASHER 10W	LED WALL WASHER 12W
SKU No.	WW7126	WW7127	WW7128
Watts	9W	10W	12W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	720 lm	800 lm	960 lm
Beam Angle	15°	15°	15°
Light Color	WW	WW	WW
CRI	>80	>80	>80
IP Rating	IP67	IP67	IP67
Life Span	25 000 h	25 000 h	25 000 h
Dimension	300x60x50 mm	400x60x50 mm	500x60x50 mm



EAN Code 2700K

3800156671263

3800156671270

3800156671287

Warm White
WW 2700K

Color temperature



LED INDUSTRIAL LIGHT

OPTONICA



HIGH LUMEN



60°
BEAM ANGLE



IP65



HB8142 White Light 6000K
HB8143 Neutral White 4500K



HB8144 White Light 6000K
HB8145 Neutral White 4500K



HB8146 White Light 6000K
HB8147 Neutral White 4500K



HB8148 White Light 6000K
HB8149 Neutral White 4500K

LED INDUSTRIAL LIGHT

HIGH BAY - UFO

	50W HIGH BAY-UFO	100W HIGH BAY-UFO	150W HIGH BAY-UFO	200W HIGH BAY-UFO
SKU No.	HB8142/HB8143	HB8144/HB8145	HB8146/HB8147	HB8148/HB8149
Watts	50W	100W	150W	200W
Input Voltage	AC:180-260V	AC:180-260V	AC:180-260V	AC:180-260V
Flux	5000 lm	10000 lm	15000 lm	20000 lm
Beam Angle	60°	60°	60°	60°
Light Color	WH/NW	WH/NW	WH/NW	WH/NW
CRI	>70	>70	>70	>70
IP Rating	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	135x113x30 mm	168x150x30 mm	180x178x35 mm	203x214x35 mm



EAN Code 6000K
EAN Code 4500K

3800156681422
3800156681439

3800156681446
3800156681453

3800156681460
3800156681477

3800156681484
3800156681491

LED INDUSTRIAL LIGHT

OPTONICA



HIGH LUMEN



120°x 60°

BEAM ANGLE



IP44

A+

LED INDUSTRIAL LIGHT

LINEAR HIGH BAY



HB8151 White Light 6000K
HB8152 Neutral White 4500K



HB8153 White Light 6000K
HB8154 Neutral White 4500K



HB8155 White Light 6000K
HB8156 Neutral White 4500K



HB8157 White Light 6000K
HB8158 Neutral White 4500K

	50W LINEAR HIGH BAY	100W LINEAR HIGH BAY	150W LINEAR HIGH BAY	200W LINEAR HIGH BAY
SKU No.	HB8151/HB8152	HB8153/HB8154	HB8155/HB8156	HB8157/HB8158
Watts	50W	100W	150W	200W
Input Voltage	AC220-240V	AC220-240V	AC220-240V	AC220-240V
Flux	5000 lm	10000 lm	15000 lm	20000 lm
Beam Angle	120°60°	120°60°	120°60°	120°60°
Light Color	WH/NW	WH/NW	WH/NW	WH/NW
CRI	>70	>70	>70	>70
IP Rating	IP44	IP44	IP44	IP44
Life Span	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	315x140x130 mm	572x140x125 mm	847x140x125 mm	1117x140x125 mm

White Light
WH 6000K

Neutral White
NW 4500K

Color temperature

EAN Code 6000K
EAN Code 4500K

3800156681514
3800156681521

3800156681538
3800156681545

3800156681552
3800156681569

3800156681576
3800156681583

LED INDUSTRIAL LIGHT

OPTONICA



HIGH LUMEN



90°
BEAM ANGLE



SAVE
80%
ENERGY



IP54

A+

LED INDUSTRIAL LIGHT HIGH BAY

OSRAM
CHIP



30W



2400
LUMENS

HB8122

White Light

5700K

55W



4400
LUMENS

HB8123

White Light

5700K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

30W HIGH BAY

HB8122

30W

AC:220-240V

2400 lm

90°


WH-5700K

>70

IP54

25 000 h

φ335x262mm



55W HIGH BAY

HB8123

55W

AC:220-240V

4400 lm

90°


WH-5700K

>70

IP54

25 000 h

φ435x295mm



White Light
WH 5700K

Color temperature


EAN Code 5700K

3800156681224

3800156681231


LED INDUSTRIAL LIGHT

OPTONICA



LED INDUSTRIAL LIGHT HIGH BAY


OSRAM
CHIP



HB8124

White Light


5700K



HB8125

White Light




5700K



HB8127

White Light

5700K

	100W HIGH BAY	150W HIGH BAY	200W HIGH BAY
SKU No.	HB8124	HB8125	HB8127
Watts	100W	150W	200W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	10000 lm	15000 lm	20000 lm
Beam Angle	60°	60°	60°
Light Color	WH-5700K	WH-5700K	WH-5700K
CRI	>70	>80	>80
IP Rating	IP54	IP54	IP54
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ402x349mm 	φ485x290mm 	φ520x379mm 



EAN Code 5700K


3800156681248

3800156681255

3800156681279

LED INDUSTRIAL LIGHT

OPTONICA



LED INDUSTRIAL LIGHT

HIGH BAY - UFO

OSRAM
CHIP



HB8140 White Light 5700K







HB8141 White Light 5700K



HB8126 White Light 5700K

	100W HIGH BAY - UFO	150W HIGH BAY - UFO	200W HIGH BAY - UFO
SKU No.	HB8140	HB8141	HB8126
Watts	100W	150W	200W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V
Flux	10000 lm	15000 lm	20000 lm
Beam Angle	90°	90°	90°
Light Color	WH-5700K	WH-5700K	WH-5700K
CRI	>70	>70	>70
IP Rating	IP54	IP54	IP54
Life Span	25 000 h	25 000 h	25 000 h
Dimension	φ300x110mm	φ400x140mm	φ405x160mm



EAN Code 5700K

3800156681408

3800156681415

3800156681262


LED INDUSTRIAL LIGHT

OPTONICA



⚡ Watts	25W	☀ CRI	>70
⌚ Input Voltage	AC:110-240V	🔒 IP Rating	IP20
💡 Flux	2500 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ75x235

A+

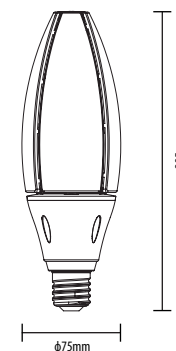

SKU No.
HB220 White Light
5700K



Color temperature

25W LED BULB E27

INDUSTRIAL PF>0.9



EAN Code 5700K 3800156602205

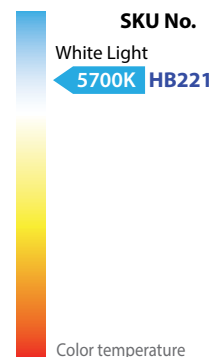

⚡ Watts	50W	☀ CRI	>70
⌚ Input Voltage	AC:110-240V	🔒 IP Rating	IP20
💡 Flux	5000 lm	🕒 Life Span	25 000 h
🔍 Beam Angle	270°	📏 Dimension	φ105x280

A+



EAN Code 5700K 3800156602212

50W LED BULB E40

INDUSTRIAL PF>0.9



LED STREET LIGHT

OPTONICA



adjusting angle

LED STREET LIGHT 26W

5 YEARS WARRANTY PF>0.95

⚡ Watts	26W	☀️ CRI	>70
⚡ Input Voltage	AC:220-240V	🔧 IP Rating	IP65
⚡ Flux	3000 lm	🕒 Life Span	25 000 h
📐 Beam Angle	120°	📏 Dimension	490x120x60mm



A+

SKU No.

SL9164 White Light 5000K

Color temperature



LUMENS



BEAM ANGLE



HIGH LUMEN



IP65

EAN Code 5000K 3800156691643

LED STREET LIGHT ADAPTER (ADJUSTABLE ANGLE 90°) 60mm-60mm

SKU No. SL9119

🔧 Material	Aluminium
📏 Dimension	Φ80 x 325 mm

Compatible with all our street light models, this adapter allows the angle of the streetlights to be adjusted as per client's requirements.

Included in the package screws and nuts for fastening.



LED PORTABLE FLOODLIGHT

OPTONICA



CAR CHARGER INCLUDED



120°
BEAM ANGLE



RECHARGEABLE



IP65

LED SMD FLOODLIGHT RECHARGEABLE

10W
800
LUMENS

FL5406 Neutral Light 4500K

20W
1600
LUMENS

FL5407 Neutral Light 4500K

-  **SKU No.**
-  **Watts**
-  **Input Voltage**
-  **Flux**
-  **Beam Angle**
-  **Light Color**
-  **CRI**
-  **IP Rating**
-  **Life Span**
-  **Dimension**

10W SMD FLOODLIGHT

FL5406	FL5407
10W	20W
AC:220-240V	AC:220-240V
800 lm	1600 lm
120°	120°
NW	NW
>80	>80
IP65	IP65
25 000 h	25 000 h
115x85x105 mm	180x140x120 mm



3800156654068



3800156654075



EAN Code 4500K

LED STREET LIGHT

OPTONICA



adjusting angle

LED STREET LIGHT

5 YEARS WARRANTY PF>0.95

30W



LUMENS

SL9156

White Light

5700K

50W



LUMENS

SL9157

White Light

5700K

60W



LUMENS

SL9158

White Light

5700K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

30W STREET LIGHT

SL9156

30W

AC:100-240V

4050 lm


120°

WH-5700K

>70

IP65

25 000 h



3800156691568

50W STREET LIGHT

SL9157

50W

AC:100-240V

6750 lm


120°

WH-5700K

>70

IP65

25 000 h



3800156691575

60W STREET LIGHT

SL9158

60W

AC:100-240V

8100 lm


120°

WH-5700K

>70

IP65

25 000 h



3800156691582

White Light
WH 5700K

Color temperature

EAN Code 5700K

LED STREET LIGHT

OPTONICA

A⁺



20W



50W



80W



100W



LED STREET LIGHT

SL9171 White Light 6000K SL9172 White Light 6000K SL9173 White Light 6000K SL9174 White Light 6000K



SKU No.



Watts



Input Voltage



Flux



Beam Angle



Light Color



CRI



IP Rating



Life Span



Dimension


20W STREET LIGHT

50W STREET LIGHT

80W STREET LIGHT

100W STREET LIGHT

SL9171	SL9172	SL9173	SL9174
20W	50W	80W	100W
AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
2000 lm	5000 lm	8000 lm	10000 lm
120°	120°	120°	120°
WH-6000K	WH-6000K	WH-6000K	WH-6000K
>70	>70	>70	>70
IP65	IP65	IP65	IP65
25 000 h	25 000 h	25 000 h	25 000 h
300x105x50mm	405x160x50mm	500x190x70mm	602x220x70mm




EAN Code 6000K

3800156691711

3800156691728

3800156691735

3800156691742




LED STREET LIGHT

OPTONICA



DC Driver Technology
INVENTRONICS



LED STREET LIGHT

5 YEARS WARRANTY PF>0.95

50W



SL9183 White Light 5700K

75W



SL9184 White Light 5700K

100W



SL9185 White Light 5700K

150W



SL9186 White Light 5700K

200W






SL9187 White Light 5700K

	50W STREET LIGHT	75W STREET LIGHT	100W STREET LIGHT	150W STREET LIGHT	200W STREET LIGHT
SKU No.	SL9183	SL9184	SL9185	SL9186	SL9187
Watts	50W	75W	100W	150W	200W
Input Voltage	AC:120-240V	AC:120-240V	AC:120-240V	AC:120-240V	AC:120-240V
Flux	6 000 lm	9 000 lm	12 000 lm	18 000 lm	24 000 lm
Beam Angle	120°	120°	120°	120°	120°
Light Color	WH-5700K	WH-5700K	WH-5700K	WH-5700K	WH-5700K
CRI	>80	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	420x190x120mm	420x190x120 mm	540x240x150 mm	770x305x156 mm	770x305x156 mm

White Light
WH 5700K

Color temperature



EAN Code 5700K

3800156691834

3800156691841

3800156691858

3800156691865

3800156691872

LED STREET LIGHT

OPTONICA



BRIDGELUX
3030LED



LED STREET LIGHT

5 YEARS WARRANTY PF>0.95



SL9181 White Light 5700K



SL9182 White Light 5700K



SKU No.



Watts



Input Voltage



Flux



Beam Angle



Light Color



CRI



IP Rating




Life Span



Dimension

150W STREET LIGHT

SKU No.	SL9181	SL9182
Watts	150W	200W
Input Voltage	AC:220-240V	AC:220-240V
Flux	14 250 lm	19 000 lm
Beam Angle	120°	120°
Light Color	WH-5700K	WH-5700K
CRI	>80	>80
IP Rating	IP65	IP65
Life Span	25 000 h	25 000 h
Dimension	770x305x156 mm	770x305x156 mm



EAN Code 5700K

3800156691810

3800156691827

White Light
WH 5700K

Color temperature



LED STREET LIGHT

OPTONICA



BRIDGELUX
3030LED



AC Dimmable
0-10V



LED STREET LIGHT

5 YEARS WARRANTY PF>0.95

50W



LUMENS

SL9188 White Light 5700K

75W



LUMENS

SL9189 White Light 5700K

100W



LUMENS

SL9190 White Light 5700K

150W



LUMENS

SL9191 White Light 5700K

200W



LUMENS

SL9192 White Light 5700K

	50W STREET LIGHT	75W STREET LIGHT	100W STREET LIGHT	150W STREET LIGHT	200W STREET LIGHT
SKU No.	SL9188	SL9189	SL9190	SL9191	SL9192
Watts	50W	75W	100W	150W	200W
Input Voltage	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
Flux	4 750 lm	7 150 lm	9 500 lm	14 250 lm	19 000 lm
Beam Angle	120°	120°	120°	120°	120°
Light Color	WH-5700K	WH-5700K	WH-5700K	WH-5700K	WH-5700K
CRI	>80	>80	>80	>80	>80
IP Rating	IP65	IP65	IP65	IP65	IP65
Life Span	25 000 h	25 000 h	25 000 h	25 000 h	25 000 h
Dimension	420x195x120mm	420x195x120 mm	540x240x150 mm	770x305x156 mm	770x305x156 mm
EAN Code 5700K	3800156691889	3800156691896	3800156691902	3800156691919	3800156691926

White Light
WH 5700K

Color temperature

LED STREET LIGHT

OPTONICA



LED STREET LIGHT

5 YEARS WARRANTY PF>0.95

Integral surge protection

25W



SL9165 White Light 5700K

50W



SL9167 White Light 5700K

75W



SL9170 White Light 5700K

100W



SL9169 White Light 5700K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

25W STREET LIGHT

50W STREET LIGHT



75W STREET LIGHT

100W STREET LIGHT

SL9165	SL9167	SL9170	SL9169
25W	50W	75W	100W
AC:220-240V	AC:220-240V	AC:220-240V	AC:220-240V
2500 lm	5000 lm	7500 lm	10000 lm
120°	120°	120°	120°
WH-5700K	WH-5700K	WH-5700K	WH-5700K
>70	>70	>70	>70
IP65	IP65	IP65	IP65
25 000 h	25 000 h	25 000 h	25 000 h

White Light
WH 5700K

Color temperature



EAN Code 5700K

3800156691650

3800156691674

3800156691704

3800156691698

LED STREET LIGHT

OPTONICA



HIGH LUMEN



90°-120°

BEAM ANGLE




IP65

LED STADIUM FLOODLIGHT


5 YEARS WARRANTY PF>0.95



SL9175 White Light 5700K



SL9176 White Light 5700K



SL9177 White Light 5700K



SL9178 White Light 5700K

SKU No.

Watts

Input Voltage

Flux

Beam Angle

Light Color

CRI

IP Rating

Life Span

Dimension

100W STADIUM FL

150W STADIUM FL


240W STADIUM FL

480W STADIUM FL


SL9175	SL9176	SL9177	SL9178
100W	150W	240W	480W
AC:100-240V	AC:100-240V	AC:100-240V	AC:100-240V
10000lm	15000 lm	24000 lm	48000 lm
120°	120°	90°	90°
WH-5700K	WH-5700K	WH-5700K	WH-5700K
>70	>70	>70	>70
IP65	IP65	IP65	IP65
25 000 h	25 000 h	25 000 h	25 000 h

White Light
WH 5700K


Color temperature




3800156691759



3800156691766



3800156691773



3800156691780

EAN Code 5700K

LED STREET LIGHT

OPTONICA



HIGH LUMEN



60°

BEAM ANGLE



IP65

LED STADIUM FLOODLIGHT

5 YEARS WARRANTY PF>0.95

240W



LUMENS

SL9179 White Light 5700K

480W



LUMENS

SL9180 White Light 5700K



SKU No.



Watts



Input Voltage



Flux



Beam Angle



Light Color



CRI



IP Rating



Life Span




Dimension


240W STADIUM FL

480W STADIUM FL


SL9179	SL9180
240W	480W
AC:100-240V	AC:100-240V
24000 lm	48000 lm
60°	60°
WH-5700K	WH-5700K
>70	>70
IP65	IP65
25 000 h	25 000 h



3800156691797



3800156691803



EAN Code 5700K

LED OUTDOOR LIGHTS

OPTONICA



⚡ Watts	1W	☀️ CRI	>80
⚡ Input Voltage	AC:200-240V	💧 IP Rating	IP65
☀️ Flux	80 lm	⌚ Life Span	25 000 h
📐 Beam Angle	18°	📏 Dimension	φ65xH90 mm

A+

SKU No.

White Light
OT0507 6000K

Warm White
OT0517 2800K

Color temperature

1W OUTDOOR LIGHT BUILT-IN STOPLIGHT



EAN Code 6000K 3800156605077

EAN Code 2800K 3800156605176



⚡ Watts	3W	☀️ CRI	>80
⚡ Input Voltage	AC:200-240V	💧 IP Rating	IP65
☀️ Flux	240 lm	⌚ Life Span	25 000 h
📐 Beam Angle	18°	📏 Dimension	φ98x80mm

A+



EAN Code 6000K 3800156605015

EAN Code 2800K 3800156605022

EAN Code RGB 3800156605039



3W OUTDOOR LIGHT BUILT-IN STOPLIGHT

LED OUTDOOR LIGHTS

OPTONICA



⚡ Watts	5W	☀ CRI	>80
⌚ Input Voltage	AC:200-240V	💧 IP Rating	IP65
☀ Flux	400 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	18°	📏 Dimension	φ148x90mm

A+

SKU No.

White Light
OT0515 6000K

Warm White
OT0516 2800K


Color temperature

5W OUTDOOR LIGHT BUILT-IN STOPLIGHT



EAN Code 6000K 3800156605152

EAN Code 2800K 3800156605169

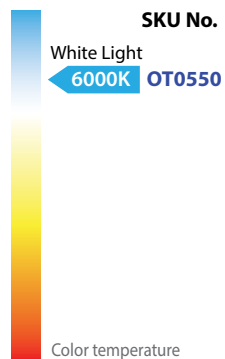

⚡ Watts	7W	☀ CRI	>80
⌚ Input Voltage	AC:200-240V	💧 IP Rating	IP20
☀ Flux	960 lm	⌚ Life Span	25 000 h
🔍 Beam Angle	18°	📏 Dimension	φ148x90mm

A+

EAN Code 6000K 3800156605503



7W OUTDOOR LIGHT BUILT-IN STOPLIGHT




MOTION SENSORS

OPTONICA



	Input Voltage	AC110-240V		Class	II
	Beam Angle	180°		Time	10sec-7min
	Range	12m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP44		Dimension	ø65x86.5mm

A+

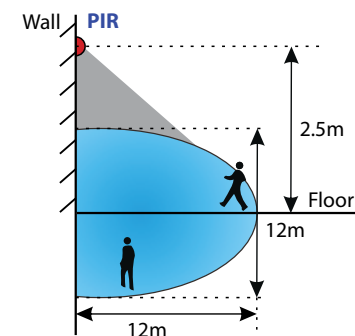

PIR MOTION SENSOR

SKU No. **SE7301**



MAX LED



SENSOR




BEAM ANGLE



IP44

EAN Code SENSOR 3800156673014



	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	180°		Time	10sec-7min
	Range	12m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP44		Dimension	ø65x86.5mm

A+



PIR MOTION SENSOR

SKU No. **SE7302**

EAN Code 6000K 3800156673021



MAX LED



SENSOR



BEAM ANGLE



IP44


MOTION SENSORS

OPTONICA



Input Voltage	AC110-240V	Class	II
Beam Angle	180°	Time	10sec-7min
Range	12m Max	Max LED	200W
Frequency	50-60 Hz	LUX	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP	IP54	Dimension	ø77x70mm

A+

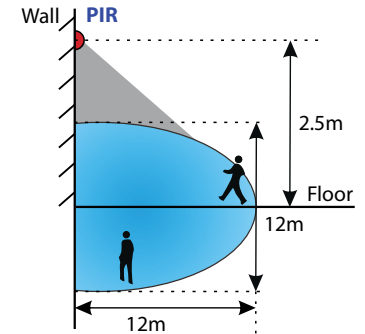

PIR MOTION SENSOR

SKU No. **SE7306**



200W
MAX LED



MOTION
PIR
SENSOR




180°
BEAM ANGLE



IP54

EAN Code SENSOR 3800156673069



Input Voltage	AC110-240V	Class	II
Illuminate Angle	180°	Time	10sec-7min
Range	12m Max	Max LED	200W
Frequency	50-60 Hz	LUX	<10Lux-2000Lux
Working Temp.	-30°C/+50°C	Material	Plastic+ALU
IP	IP54	Dimension	ø77x70mm

A+



PIR MOTION SENSOR

SKU No. **SE7307**

EAN Code 6000K 3800156673076



200W
MAX LED



MOTION
PIR
SENSOR




180°
BEAM ANGLE



IP54



	Input Voltage	AC110-240V		Class	II
	Beam Angle	360°		Time	10sec-7min
	Range	16m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	ø88x55mm




PIR MOTION SENSOR

SKU No. **SE7305**



EAN Code SENSOR 3800156673052



	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	360°		Time	10sec-7min
	Range	6m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	ø76x76mm



EAN Code 6000K 3800156673083



PIR MOTION SENSOR

SKU No. **SE7308**


MOTION SENSORS

OPTONICA



	Input Voltage	AC110-240V		Class	II
	Beam Angle	360°		Time	10sec-7min
	Range	8m Max		Max LED	1000W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	ø108x25mm

A+




PIR MOTION SENSOR

SKU No. **SE7310**



EAN Code SENSOR 3800156673106



	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	360°		Time	10sec-7min
	Range	8m Max		Max LED	1000W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP54		Dimension	ø88x34mm

A+



EAN Code 6000K 3800156673113



PIR MOTION SENSOR

SKU No. **SE7311**



	Input Voltage	AC110-240V		Class	II
	Beam Angle	180°		Time	10sec-7min
	Range	5cm Max		Max LED	200W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	75x18mm

A+



ON/OFF via moving hand




ON/OFF via open and close

SHORT DISTANCE IR

SKU No. **SE7304**



EAN Code SENSOR 3800156673045



	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	120°		Time	10sec-7min
	Range	2-10m Max		Max LED	100W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP65		Dimension	57x35mm

A+



PIR MOTION SENSOR

SKU No. **SE7309**



EAN Code 6000K 3800156673090



MICROWAVE SENSOR

SKU No. **SE7315**

	Input Voltage	AC110-240V		Class	II
	Beam Angle	180-360°		Time	10Sec"30Sec-1'5'8'10'20'30Min
	Range	25,50,75,100%		Max LED	800W
	Frequency	50-60 Hz		LUX	5,10,20,30,50,100,200Lux,24X
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	75x47mm



Dimming+Driver

5.8 Ghz

A+



800W

MAX LED



SENSOR



180°-360°

BEAM ANGLE



IP20

EAN Code SENSOR **3800156673151**



Dimming+Driver

5.8 Ghz

	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	180°-360°		Time	10sec-15min
	Range	3-10m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	56x42mm

A+



300W

MAX LED



SENSOR



180°-360°

BEAM ANGLE



IP20

EAN Code 6000K **3800156673168**



MICROWAVE SENSOR

SKU No. **SE7316**




PIR MOTION SENSOR

SKU No. **SE7303**

	Input Voltage	AC110-240V		Class	II
	Beam Angle	160°		Time	10sec-7min
	Range	9m Max		Max LED	500W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	80x80x36mm

A+



MAX LED



SENSOR




BEAM ANGLE



IP20

EAN Code SENSOR **3800156673038**



	Input Voltage	AC110-240V		Class	II
	Illuminate Angle	300°		Time	10sec-7min
	Range	16m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP44		Dimension	165x117mm

A+



MAX LED



SENSOR



BEAM ANGLE



IP44

PIR MOTION SENSOR

SKU No. **SE7313**

EAN Code 6000K **3800156673137**


MOTION SENSORS

OPTONICA



	Input Voltage	AC110-240V		Class	II
	Beam Angle	360°		Time	10sec-7min
	Range	8m Max		Max LED	300W
	Frequency	50-60 Hz		LUX	<10Lux-2000Lux
	Working Temp.	-30°C/+50°C		Material	Plastic+ALU
	IP	IP20		Dimension	ø80x62mm

A+



PIR MOTION SENSOR

SKU No. **SE7312**



MAX LED



SENSOR



BEAM ANGLE



IP20

EAN Code SENSOR 3800156673120



	Input Voltage	AC110-240V		Class	II
	Power	6A MAX		Lux	<10Lux ON;>40Lux OFF
	Frequency	50-60 Hz		Color of the Shell	WHITE + BLUE
	Working Temp.	-30°C/+50°C		Material	Plastic +ALU
	IP	IP44		Dimension	46x44x35

A+



LIGHT CONTROL SENSOR

SKU No. **SE7314**

EAN Code 6000K 3800156673144



MAX LED



SENSOR



IP44

3D GLASS PENDANT D300

CHROME FIREWORKS

- SKU No. **PD9000**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 300 \times 275 \text{mm}$



E27 Holder



3D GLASS PENDANT D300

COPPER FIREWORKS

- SKU No. **PD9001**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 300 \times 275 \text{mm}$



E27 Holder



3D GLASS PENDANT D250

COPPER CIRCLES

- SKU No. **PD9002**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 250 \times 220 \text{mm}$



E27 Holder



3D GLASS PENDANT D250

CHROME -CIRCLES

- SKU No. **PD9003**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 250 \times 220 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

CHROME SQUARES

- SKU No. **PD9004**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 175 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

COPPER SQUARES

- SKU No. **PD9005**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 175 \text{mm}$



E27 Holder



3D GLASS PENDANT D180

CHROME FIREWORKS

- SKU No. **PD9006**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 180 \times 160 \text{mm}$



E27 Holder



3D GLASS PENDANT D180

COPPER FIREWORKS

- SKU No. **PD9007**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 180 \times 160 \text{mm}$



E27 Holder



3D GLASS PENDANT D220

CHROME CIRCLES



- SKU No. **PD9008**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 220 \times 275 \text{mm}$



E27 Holder

3D GLASS PENDANT D220

COPPER SEAGULL



- SKU No. **PD9009**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 220 \times 275 \text{mm}$



E27 Holder

3D GLASS PENDANT D220

COPPER FIREWORKS



- SKU No. **PD9010**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 220 \times 275 \text{mm}$



E27 Holder

3D GLASS PENDANT D220

CHROME SEAGULL



- SKU No. **PD9011**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 220 \times 275 \text{mm}$



E27 Holder

3D GLASS PENDANT D220

CHROME FIREWORKS



- SKU No. **PD9012**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 220 \times 275 \text{mm}$



E27 Holder

3D GLASS PENDANT D200

COPPER FIREWORKS

- SKU No. **PD9013**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 213 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

CHROME RHOMBUS

- SKU No. **PD9014**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 213 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

CHROME SQUARE

- SKU No. **PD9015**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 213 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

CHROME FIREWORKS

- SKU No. **PD9016**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 213 \text{mm}$



E27 Holder



3D GLASS PENDANT D400

COPPER SEAGULL

- SKU No. **PD9017**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 400 \times 200 \text{mm}$



E27 Holder



3D GLASS PENDANT D400

CHROME CIRCLES

- SKU No. **PD9018**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 400 \times 200 \text{mm}$



E27 Holder




3D GLASS PENDANT D200

CHROME SQUARE

- SKU No. **PD019**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 165 \text{mm}$



E27 Holder

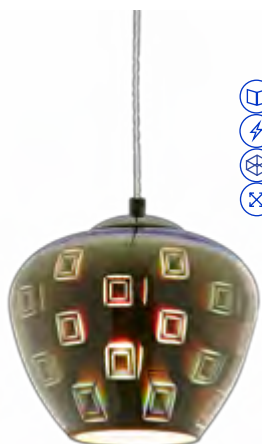

3D GLASS PENDANT D200

CHROME SEAGULL

- SKU No. **PD9020**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 165 \text{mm}$



E27 Holder



3D GLASS PENDANT D200

COPPER CIRCLES

- SKU No. **PD9021**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 200 \times 165 \text{mm}$



E27 Holder



3D GLASS PENDANT D290

COPPER CIRCLES

- SKU No. **PD9022**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 290 \times 250 \text{mm}$




E27 Holder

3D GLASS PENDANT D290

CHROME FIREWORKS

- SKU No. **PD9023**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 290 \times 250 \text{mm}$

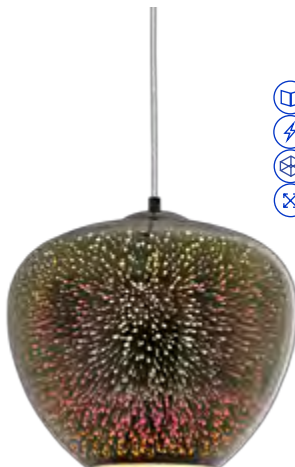

E27 Holder

3D GLASS PENDANT D290

CHROME SEAGULL

- SKU No. **PD9024**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 290 \times 250 \text{mm}$



E27 Holder

3D GLASS PENDANT D400

CHROME FIREWORKS

- SKU No. **PD9025**
- E27 Holder MAX 40W
- Material 3D Glass
- Dimension $\phi 400 \times 345 \text{mm}$



E27 Holder

3D GLASS PENDANT D400

COPPER FIREWORKS

- SKU No. **PD9026**
- Watts MAX 40W
- Material 3D Glass
- Dimension $\phi 400 \times 345 \text{mm}$



E27 Holder

LED FLAME LAMP

OPTONICA

LED FLAME LAMP 5W SMD

BRONZE COLOUR

LED LAMP INCLUDED

SKU No. OT0222

THREE MODE VERSION



A⁺

250
LUMENS

360°
BEAM ANGLE

IP20

SKU No. PD9041

Watts	5W	CRI	>80
Input Voltage	AC:100-240V	IP Rating	IP20
Flux	250 lm	Life Span	25 000 h
Beam Angle	360°	Dimension	φ180xH285 mm

LED FLAME LAMP 5W SMD

BRONZE COLOUR

WITH BATTERY

LED LAMP INCLUDED

SKU No. OT0222

THREE MODE VERSION



A⁺

250
LUMENS

360°
BEAM ANGLE

IP20

SKU No. PD9042

Watts	5W	CRI	>80
Input Voltage	AC:100-240V	IP Rating	IP20
Flux	250 lm	Life Span	25 000 h
Beam Angle	360°	Dimension	φ180xH285 mm

LED FLAME LAMP

OPTONICA



SKU No. **PD9044**
 Dimension 220xH330 mm



SKU No. **PD9045**
 Dimension 180xH260 mm

250
LUMENS

360°
BEAM ANGLE

IP20

Watts	5W	CRI	>80
Input Voltage	AC:100-240V	IP Rating	IP20
Flux	250 lm	Life Span	25 000 h
Beam Angle	360°		

LED FLAME LAMP 5W SMD BRONZE COLOUR Wall Mounted



SKU No. **PD9043**



250
LUMENS

360°
BEAM ANGLE

IP20

Watts	5W	CRI	>80
Input Voltage	AC:100-240V	IP Rating	IP20
Flux	250 lm	Life Span	25 000 h
Beam Angle	360°	Dimension	φ150xH330 mm

LED FLAME LAMP 5W SMD HANGING BRONZE COLOUR

Advantages of LED Technology

1. Long Life - LED Lighting features long operational life time expectations
2. Energy Efficiency - LED Lighting features a much better energy efficiency
3. Ecologically Friendly - LED Lighting is much more eco-friendly
4. Durable Quality - LED Illumination can withstand rough conditions
5. Zero UV Emissions - LED Lighting features close to no UV emissions
6. Design Flexibility - LED Lighting has powerful flexible design features
7. Operational in extremely cold or hot temperatures
8. Light Dispersement - LED Lights achieve higher application efficiency
9. Instant lighting & frequent switching - LEDs can be turned On/Off many times
10. Low-Voltage - LED Lighting can run on Low-Voltage Power Supply

LED lighting has even more benefits and advantages, so make sure you go LED and save both the planet - and your money!

Save Energy Buy Green

Lighting a Billion Possibilities

Perfect LED Lighting solutions to illuminate your world



OPTONICA

LED Lighting for everyone !

**OVER
1000
PRODUCTS**

**5
YEARS
WARRANTY**

GLOBAL PRESENCE



www.optonicaled.com